

L-011-H

LAMP TYPE: MR16 GU5.3 bi-pin base
Maximum 20 Watts LED, 50 Watts halogen

WARNING — Risk of Electric Shock. Install all luminaires 10 feet (3.05m) or more from a pool, spa, or fountain. Verify that power is OFF before installing this fixture. This fixture must be installed in accordance with the National Electric Code and/or local codes. Failure to do so may result in serious personal injury or death. Wiring must be done by a licensed electrician.

INSTRUCTIONS PERTAINING TO A RISK OF FIRE, OR INJURY TO PERSONS **IMPORTANT SAFETY INSTRUCTIONS**

Lighted Lamp is HOT!

WARNING - To reduce the risk of FIRE OR INJURY TO PERSONS:

- Turn off/unplug and allow to cool before replacing lamp.
- Lamp gets HOT quickly! Contact only switch/plug when turning on.
- Do not touch hot lens.
- Keep lamp away from materials that may burn.
- Do not touch the lamp at any time. Use a soft cloth. Oil from skin may damage lamp.
- Do not operate the luminaire fitting with a missing or damaged End Cap.

SAVE THESE INSTRUCTIONS

This is a low-voltage fixture for use with maximum 25A, 15V power units only. A remote transformer is required. Do not overload the transformer by installing or relamping with higher-wattage lamps that together exceed the capacity of the transformer. The low-voltage cable shall: (a) be protected by routing in close proximity to the luminaire or fitting, or next to a building structure such as a house or deck; (b) not be buried except for a maximum 6 inches (15.2cm) in order to connect to the main low-voltage cable; and (c) have the length cut off so that it is connected to a connector within 6 inches (15.2cm) from a building structure, a luminaire, or fitting. Contact Beachside Lighting for direct burial wire for use as main secondary wiring.

MOUNTING AND WIRING


The L-011-H is designed to attach to any of the Beachside Lighting Mounting Accessories listed on its specifications sheet or web page, or any appropriate mount with 1/2" female threads.

1. Verify that the power to the fixture is off.
2. The free end of the cable has a loop with a male fitting. Thread the male fitting into the mount.
3. Wrap the lead wires around the cable a few times so they don't hang loose, then feed them through the hole in the upper loop and into the mount.
4. Use silicone-filled wire nuts to attach fixture leads to wires from remote transformer. Use silicone or electrical tape around wire nuts to ensure proper connection.
5. After joining the wires, secure the mount.

The cable can also be removed entirely so the fixture can be hung directly from its brass loop.

LAMPING

1. Verify that power to the fixture is off. Remove the Housing/End Cap assembly by unscrewing the housing counter-clockwise while holding the base, exposing the Lamp compartment.
2. Grasp the Lamp at its base and pull up to remove.
3. Holding the new Lamp at its base, insert the pins fully into the socket
4. Screw Housing/End Cap back onto the fixture base. Do not overtighten.

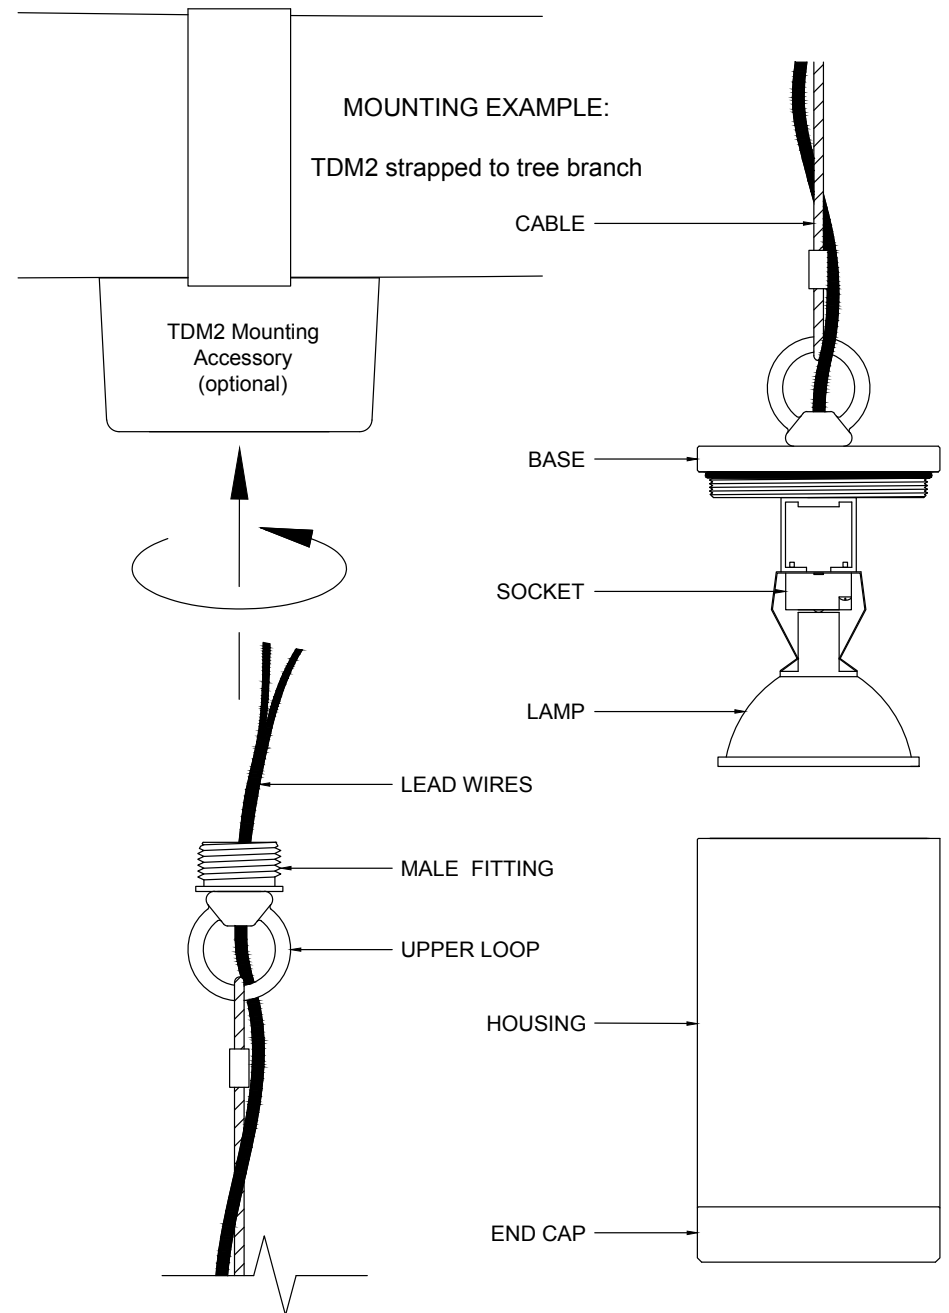

808-405-6732

www.BeachsideLighting.com

CSA Listed, file # 190030

04/2017