

# E4

The E4 is an unobtrusive, low-voltage, directional fixture. Its minimalist design brings attention to the lamp's effect, not to the fixture itself. The E4 takes advantage of LED modules that can produce 10°-120° beam spreads with just a simple change of our line of field-serviceable optics.



Shown with Dark Bronze finish

**Construction** All brass components. 1/8" [3mm] thick brass housing.

**Lens** Tempered soda lime glass. Stepped to prevent pooling of water on lens.

**Voltage** 12 Volts AC with integral driver (9-15V input, dimmable below 9V). Remote transformer required.

**Mounting** Two #8 x 2" long brass wood screws (included) secure canopy to the mounting surface.

Sleeve between U-bracket and canopy allows left / right aiming of fixture and locks position.

Fixture canopy accepts wiring from the back. Two semicircular cutouts, one at the top and one at the bottom of the canopy, accept surface run wiring. Silicone-filled wire nuts (included) allow splicing within the canopy.

**Lamps** Triac dimmable: MLV >6% typ., ELV >16% typ.

|  |                   |              |                      |
|--|-------------------|--------------|----------------------|
|  | — <b>2W-A-SP</b>  | Spot         | 10° Beam, 20° Field  |
| Cree XPE2 LED                            | — <b>2W-A-NFL</b> | Narrow Flood | 15° Beam, 32° Field  |
| 2 Watt AMBER (1500K)                     | — <b>2W-A-FL</b>  | Flood        | 29° Beam, 61° Field  |
|  | — <b>2W-A-NO</b>  | No Optic     | 46° Beam, 114° Field |
| (AMBER directionals not FFWCC certified) |                   |              |                      |
|  | — <b>3W-SP</b>    | Spot         | 13° Beam, 24° Field  |
| Cree XPG2 LED                            | — <b>3W-NFL</b>   | Narrow Flood | 17° Beam, 37° Field  |
| 3W Warm White (3000K)*                   | — <b>3W-FL</b>    | Flood        | 30° Beam, 62° Field  |
|  | — <b>3W-NO</b>    | No Optic     | 47° Beam, 86° Field  |

\* Also available in 2700K. Add color suffix to lamp specification, e.g. "3W-NFL-2700K"



**Optical Accessories** Fixture can accommodate up to two 1/8" thick optical accessories or one accessory when used in conjunction with the NO lamp optic option.

|              |                                    |
|--------------|------------------------------------|
| — <b>FR8</b> | Frosted lens                       |
| — <b>HL8</b> | Honeycomb louver, 1/8" [3mm] thick |
| — <b>PR8</b> | Prismatic spread lens              |
| — <b>RT8</b> | Rectilinear spread lens            |

**Finish:** Unfinished is standard; no specification required. The fixture will weather to a natural patina. The patina process is natural with brass and copper. Rate of patina and eventual color is dependent upon climate and proximity to the ocean. Thus, Beachside does not guarantee any specific appearance.

**Weight:** 1.6 lbs. [0.7 kg]

IP 66  
CSA Listed, file #190030  
10 year fixture warranty  
5 year Cree LED module warranty

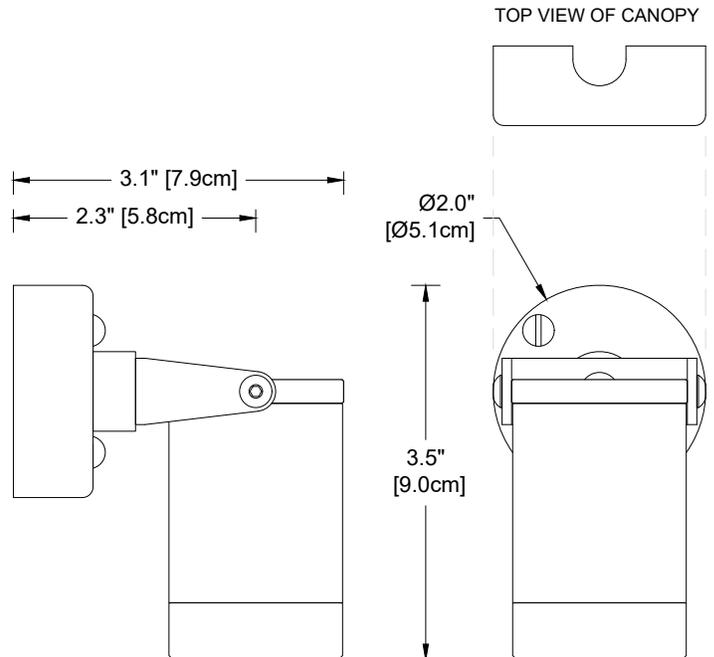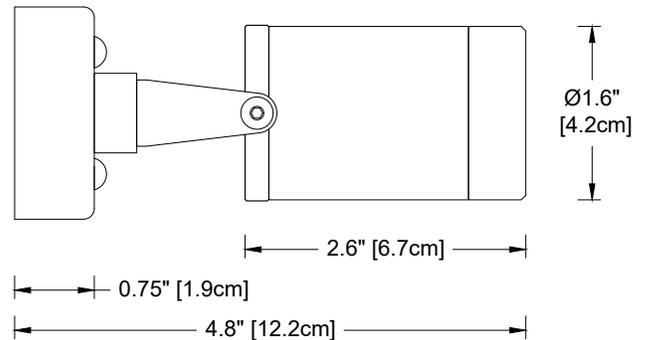

**MADE IN USA**

|   |      |                |
|---|------|----------------|
| Project   | By   | Date           |
| For ordering purposes, please specify (example: <b>E4-2W-A-SP-FR8-HL8</b> ) |      |                |
| <b>E4</b>   | —    | —              |
| Fixture   | Lamp | Accessory(ies) |