

E8-H

The E8-H is an unobtrusive, low-voltage, hanging fixture. Its minimalist design brings attention to the lamp's effect, not to the fixture itself. The E8-H takes advantage of LED modules that can produce 10°-120° beam spreads with just a simple change of our line of field-serviceable optics.



Construction All brass components. 1/8" [3mm] thick brass housing.

Lens Tempered soda lime glass.

Mounting Supplied with 20" stainless steel cable, 36" lead wire, and 1/2" male fitting for mounting accessory. Or the cable can be removed and the fixture hung directly by its loop.

Voltage 12 Volts AC with integral driver (9-15V input, dimmable below 9V). Remote transformer required.

Lamps Triac dimmable: MLV >6% typ., ELV >16% typ.

Cree XPE2 LED 2 Watt Amber (1500K) TURTLE FRIENDLY	__ 2W-A-SP	Spot	10° Beam, 20° Field
	__ 2W-A-NFL	Narrow Flood	15° Beam, 32° Field
	__ 2W-A-FL	Flood	29° Beam, 61° Field
	__ 2W-A-NO	No Optic	46° Beam, 114° Field
Cree XPG2 LED 3 and 4 Watt Warm White (3000K)*	__ 3W-SP	Spot	13° Beam, 24° Field
	__ 3W-NFL	Narrow Flood	17° Beam, 37° Field
	__ 3W-FL	Flood	30° Beam, 62° Field
	__ 3W-NO	No Optic	47° Beam, 86° Field
	__ 4W-SP	Spot	13° Beam, 24° Field
	__ 4W-NFL	Narrow Flood	17° Beam, 38° Field
	__ 4W-FL	Flood	30° Beam, 62° Field
	__ 4W-NO	No Optic	71° Beam, 121° Field

* Also available in 2700K. Add color suffix to lamp specification, e.g. "3W-NFL-2700K"

Optical Accessories

__ BGS8F	Brass glare shield, full cutoff
__ FR8	Frosted lens
__ HL8	Honeycomb louver, 1/8" [3mm] thick
__ PR8	Prismatic spread lens
__ RT8	Rectilinear spread lens


Mounting Accessories

__ TDM1	Brass tree/deck mount with stainless steel screws
__ TDM2-__	Brass tree mount with nylon strap (48 , 72 , or 96")
__ TDM2SS-__	Brass tree mount with stainless steel strap (48 , 72 , or 96")
__ TDM3	Brass low-profile deck/wall mount
__ TDM4	Brass low-profile tree mount with notch for wire
__ TMJB-__	Brass tree-mounted junction box, single fixture mount, stainless steel strap (48 , 72 , or 96")
__ TMJBX	Brass tree-mounted junction box, single fixture mount, stainless steel screws

Finish: Unfinished is standard; no specification required. The fixture will weather to a natural patina. The patina process is natural with brass and copper. Rate of patina and eventual color is dependent upon climate and proximity to the ocean. Thus, Beachside does not guarantee any specific appearance.

Weight: 1.2 lbs. [0.5 kg]

IP 66
CSA Listed, file #190030
10 year fixture warranty
5 year Cree LED module warranty

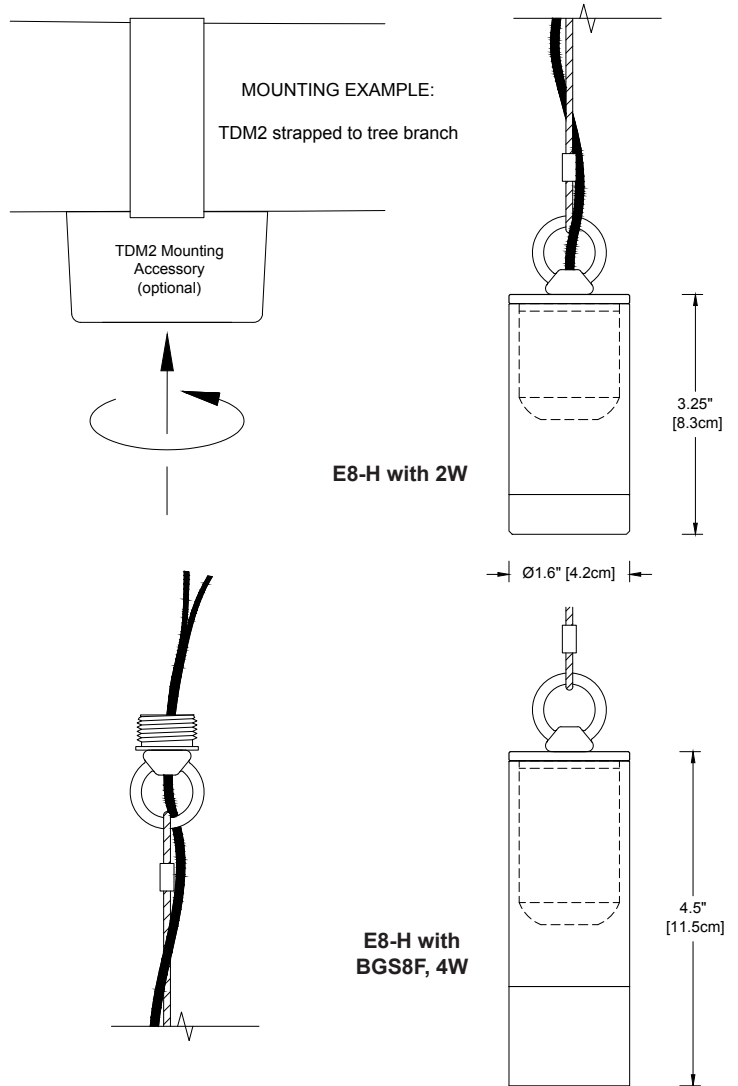

MADE IN USA

Project _____	By _____	Date _____
For ordering purposes, please specify (example: E8-H-2W-A-SP-TDM2-72-BGS8)		
E8-H	—	—
Fixture	Lamp	Accessory(ies)