

L-011

LAMP TYPE: MR16, GU5.3 bi-pin base; Maximum 20 Watts LED, 50 Watts halogen FOR OUTDOOR USE ONLY

WARNING — Risk of Electric Shock. Install all luminaires 10 feet (3.05 m) or more from a pool, spa, or fountain. Verify that power is OFF before installing this fixture. This fixture must be installed in accordance with the National Electric Code and/or local codes. Failure to do so may result in serious personal injury or death. Wiring must be done by a licensed electrician.

For luminaires equipped with halogen lamps:

INSTRUCTIONS PERTAINING TO A RISK OF FIRE OR INJURY TO PERSONS IMPORTANT SAFETY INSTRUCTIONS SAVE THESE INSTRUCTIONS Lighted lamp is HOT!

WARNING — To reduce the risk of FIRE OR INJURY TO PERSONS:

- Turn off/unplug and allow to cool before replacing lamp.
- Lamp gets HOT quickly! Contact only switch/plug when turning on.
- Do not touch hot lens or faceplate.
- Keep lamp away from materials that may burn.
- Do not touch the lamp at any time. Use a soft cloth. Oil from skin may damage lamp.
- Do not operate the luminaire fitting with a missing or damaged faceplate or lens.

This is a low-voltage fixture for use with maximum 25A, 15V power units only. A remote transformer is required. Do not overload the transformer by installing or relamping with higher wattage lamps that together exceed the capacity of the transformer. The unit low-voltage cable shall: a) be protected by routing in close proximity to the luminaire or fitting, or next to a building structure such as a house or deck; b) not be buried except for a maximum 6 inches (15.2 cm) in order to connect to the main low-voltage cable; and c) have the length cut off so that it is connected to a connector within 6 inches (15.2 cm) from a building structure, a luminaire, or fitting. Contact Beachside Lighting for low voltage cable and direct burial wire for use as main secondary wiring. THIS DEVICE IS ACCEPTED AS A COMPONENT OF A LANDSCAPE LIGHTING SYSTEM WHERE THE SUITABILITY OF THE COMBINATION SHALL BE DETERMINED BY CSA OR LOCAL INSPECTION AUTHORITIES HAVING JURISDICTION.



INSTALLATION

This fixture is to be mounted to an anchored junction box or in-ground mounting spike.

1. Verify that the power is off.
2. Feed the wire leads from the fixture through the Locknut and junction box/ground spike Cover.
3. Thread the locknut fully onto the Knuckle base and then thread the Knuckle into the junction box/ground spike cover.
4. Aim the fixture and tighten the Locknut down tight to the junction box or spike Cover.
5. Use silicone-filled wire nuts to join fixture wires and wires from power source. Use silicone or electrical tape around wire nuts to ensure proper connection.
6. Push the connections into the junction box/ground spike and attach Cover.
7. Adjust the angle of the fixture head to the desired position and tighten the Knuckle with a 5/32" hex wrench.

RELAMPING

1. The lens/cap assembly is permanently attached to the Housing. Do not attempt to unscrew this piece.
2. Turn the brass lamp compartment Housing counterclockwise to unscrew it from the Base.
3. Holding the lamp at its base, pull straight up to remove from socket.
4. Holding the new lamp at its base, align the lamp pins with the holes in the socket and insert by pushing straight down.
5. Screw the Housing back onto the fixture Base.

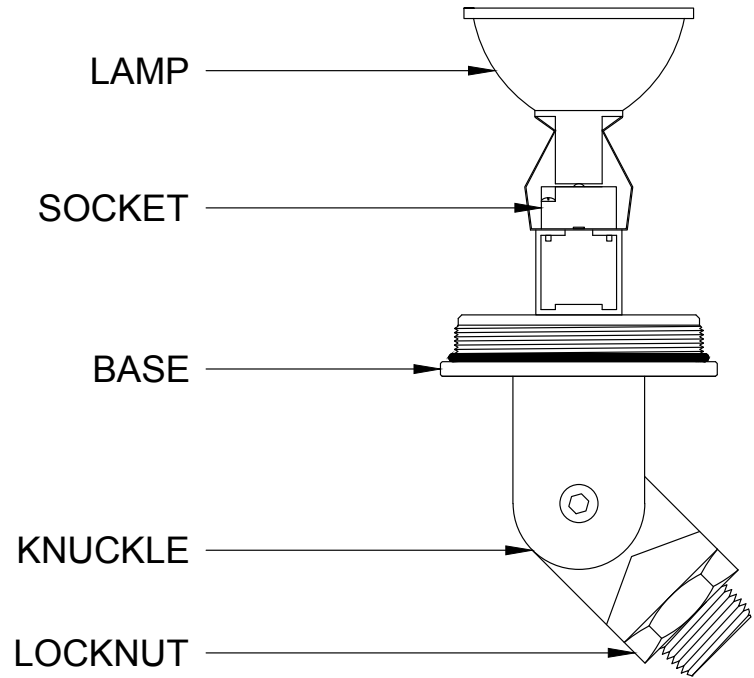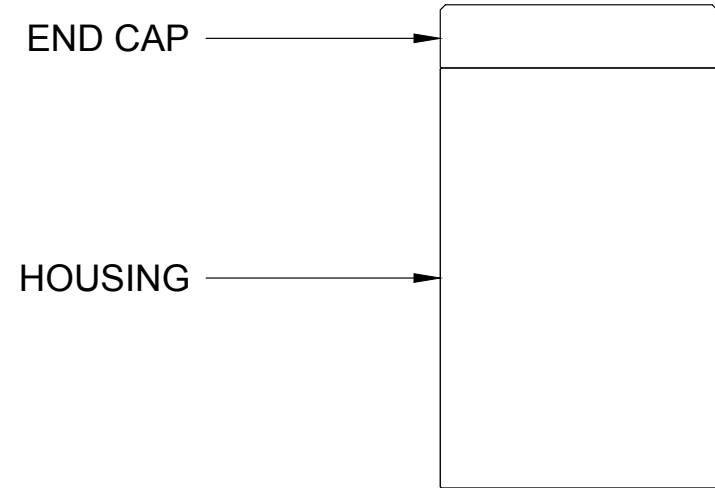

808-405-6732
www.BeachsideLighting.com

CSA Listed, file # 190030