

L-010-C / L-010-C-CR

The L-010-C is a brass and composite, in-ground uplight. An internal bracket assembly allows 360° rotation and angling of the lamp up to 16° before any cutoff. The integrated junction box at the base of the housing has two 3/4" NPT-tapped holes for conduit entry on the bottom and two more on opposite side walls.



Fixture shown with optional PG protection grate and BGS2 glare shield accessories

- L-010-C-120V** 120V At-grade application for soil, gravel, or brick
- L-010-C-CR-120V** 120V Same as L-010-C-120V but with a **CONCRETE RING** for fully recessed concrete installation
- L-010-C-230V** 230V At-grade application for soil, gravel, or brick
- L-010-C-CR-230V** 230V Same as L-010-C-230V but with a **CONCRETE RING** for fully recessed concrete installation

Construction Cast brass cover on composite housing

Lens Clear, tempered glass.

Voltage 120V or 230V AC

Lamps

Cree chipset	— 5W-NFL	5 Watt	25° narrow flood
MR16 LED, GU10	— 5W-FL	5 Watt	40° flood
Warm White (3000K)	— 5W-WFL	5 Watt	100° wide flood
Soraa chipset	— 8W-SP	8 Watt	10° spot
MR16 LED, GU10	— 8W-NFL	8 Watt	25° narrow flood
Warm White (3000K)	— 8W-FL	8 Watt	36° flood

Accessories

- **BGS2** Brass glare shield
- **PG** Brass protection grate



Optical Accessories

- **FR-MR16** Frosted lens
- **HL-MR16** Honeycomb louver, 1/8" [3mm] thick
- **PR-MR16** Prismatic spread lens
- **RT-MR16** Rectilinear spread lens

Finish: Unfinished is standard; no specification required. The fixture will weather to a natural patina. The patina process is natural with brass and copper. Rate of patina and eventual color is dependent upon climate and proximity to the ocean. Thus, Beachside does not guarantee any specific appearance.

Weight: 5.3 lbs. [2.4 kg]

IP 67
 CSA Listed, file #190030
 10 year fixture warranty
 3 year warranty on MR16 LED lamps
 Drive-over static load rating: 12,500 lbs

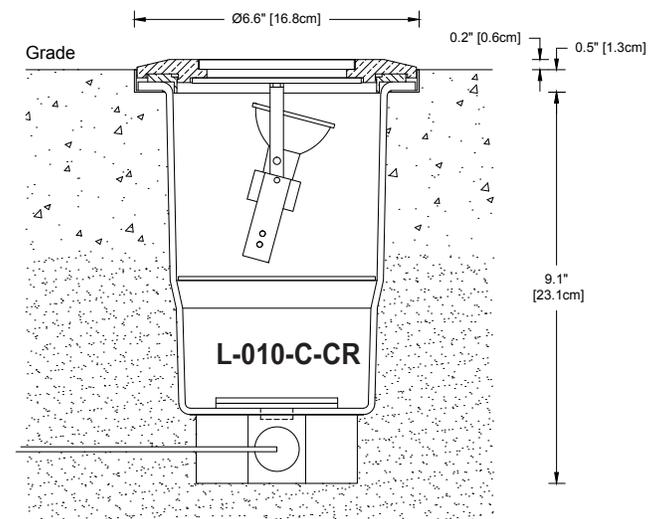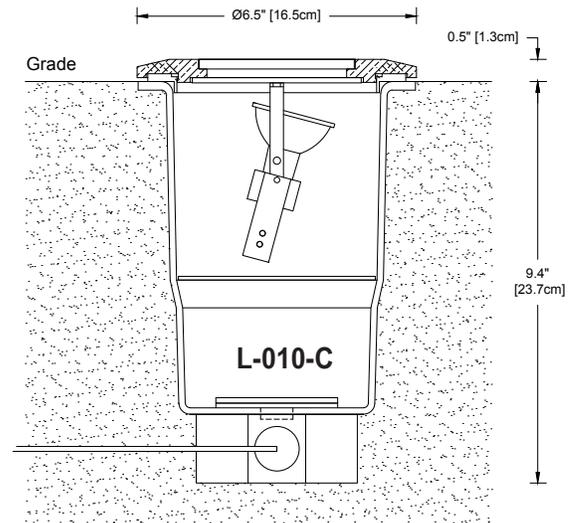

Fixtures supplied with 15 ft. [4.5 m] type SJOOW cord for remote connectors.

MADE IN USA

Project	By	Date
For ordering purposes, please specify (example: L-010-C-CR-120V-5W-FL-PG-FR-MR16)		
L-010-C-	V	
Fixture / Voltage	Lamp	Accessory(ies)