

R-SERIES (LED)

Includes models R3, R3A, R5, R5A, R7, R8 & R19.

LAMP: GU5.3, MR16, 5 or 9 Watt

INSTRUCTIONS PERTAINING TO A RISK OF FIRE OR INJURY TO PERSONS

IMPORTANT SAFETY INSTRUCTIONS

Lighted Lamp is HOT!

WARNING - To reduce the risk of FIRE OR INJURY TO PERSONS:

Turn off/unplug and allow to cool before replacing lamp. Lamp gets HOT quickly! Contact only switch/plug when turning on. Low voltage Luminaires can become very hot depending on the lamp wattage used. Glass lens and metal areas around lamp can become hot enough to blister hands. Particular care should be taken not to locate fixtures where small children can reach them if higher wattages are used. Do not touch hot lens, guard, or enclosure. Keep lamp away from materials that may burn. Do not touch the lamp at any time with bare skin. Use a soft cloth. Oil from skin may damage lamp. Do not operate the luminaire fitting with a missing or damaged shield. Not intended for indoor use.

SAVE THESE INSTRUCTIONS

INSTALLATION INSTRUCTIONS

This is a low voltage fixture for use with maximum 25A, 15V power units only. A remote transformer is required. Main secondary wiring is intended for shallow burial, less than 6 inches, unless suitable for direct burial. Contact Beachside Lighting for direct burial wire for use as main secondary wiring. **The fixture shall not be installed within 10 feet of a pool, spa, or fountain.** Do not overload the transformer by installing or re-lamping with higher wattage lamps that together exceed the capacity of the transformer.

MOUNTING

This fixture is to be mounted on either an anchored junction box or in-ground mounting spike. Thread fixture's stem in to either junction box cover or mounting spike. The bottom of the stem must be fully threaded to ensure stability.


WIRING

Verify that power to fixture is off. Use silicone filled wire nuts to ensure proper connection between fixture wire and wire from power source. Push connections into junction box or ground spike before reattaching cover.

LAMPING

Grasp the fixture body under the shade and below the glass shield and turn it counterclockwise. The housing will unscrew at its base. Holding the lamp at its base, pull up to remove. Holding the new lamp at its base, insert the pins fully into the socket. Screw the housing back onto the fixture base. Do not overtighten.

CSA Listed, file # 190030

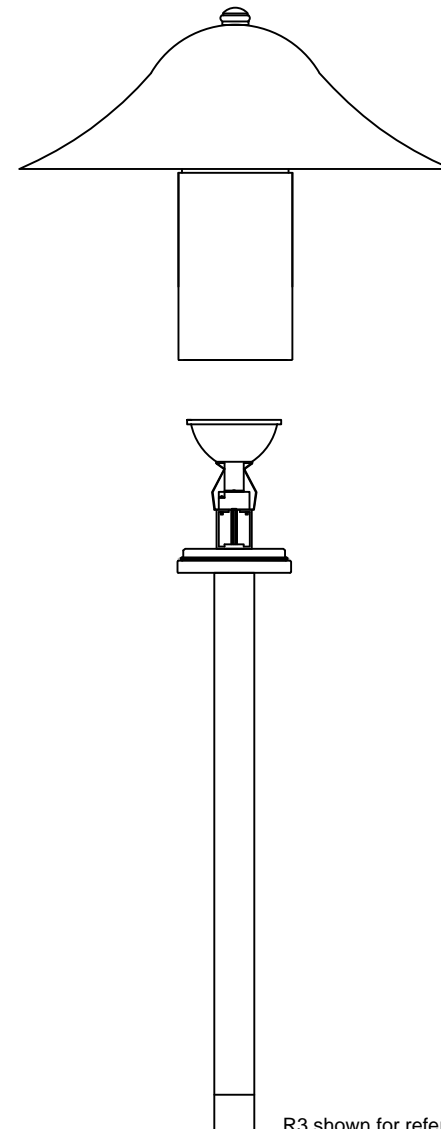

R3 shown for reference



808-405-6732
www.BeachsideLighting.com