

E8-H-2x4.5 / E8-H-2x9

LAMP TYPE: BA15 double-contact bayonet base, maximum 26 Watts

SUITABLE FOR INDOOR OR OUTDOOR USE



WARNING — RISK OF ELECTRIC SHOCK. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved. Failure to do so may result in serious personal injury or death.

For luminaires equipped with halogen lamps:

INSTRUCTIONS PERTAINING TO A RISK OF FIRE OR INJURY TO PERSONS IMPORTANT SAFETY INSTRUCTIONS SAVE THESE INSTRUCTIONS

Lighted lamp is HOT!

WARNING — To reduce the risk of FIRE OR INJURY TO PERSONS:

- Turn off/unplug and allow to cool before replacing lamp.
- Lamp gets HOT quickly! Contact only switch/plug when turning on.
- Do not touch hot lens or enclosure.
- Keep lamp away from materials that may burn.
- Do not touch the lamp at any time. Use a soft cloth. Oil from skin may damage lamp.
- Do not operate the luminaire fitting with a missing or damaged lens or housing.

This is a low-voltage fixture for use with maximum 25A, 15V power units only. A remote transformer is required. Do not overload the transformer by installing or relamping with higher wattage lamps that together exceed the capacity of the transformer. Protect the fixture wiring by routing in close proximity to the luminaire or fitting, or next to a structure like a house or deck. Do not bury except for a maximum 6 inches (15.2 cm) to connect to the main low-voltage cable. Trim fixture wires so connection is made within 6 inches (15.2 cm) from a building structure, luminaire, or fitting. Contact Beachside Lighting below to order main low voltage cable and accessories.

- FOR USE WITH LANDSCAPE LIGHTING POWER SUPPLY ONLY
- THIS DEVICE IS ACCEPTED AS A COMPONENT OF A LANDSCAPE LIGHTING SYSTEM WHERE THE SUITABILITY OF THE COMBINATION SHALL BE DETERMINED BY THE LOCAL INSPECTION AUTHORITIES HAVING JURISDICTION
- DO NOT CONNECT TWO OR MORE POWER SUPPLIES IN PARALLEL
- LANDSCAPE LIGHTING SYSTEMS ARE FOR OUTDOOR USE ONLY
- NOT FOR USE IN DWELLING UNITS
- A luminaire shall not use tungsten halogen lamps unless the luminaire is marked for such lamps


INSTALLATION

The E8-H-2x4.5 and -2X9 is designed to attach to any of the Beachside Lighting Mounting Accessories listed on its specification sheet, or any appropriate mount with 1/2" female threads. The cable also can be removed entirely so the fixture can be hung directly from its brass loop.

1. Verify that power to the fixture is OFF. The free end of the cable has a loop with a male fitting; thread the male fitting into the mount.
2. Wrap the lead wires around the cable a few times so they don't hang loose, then feed them through the hole in the upper loop and into the mount.
3. Join fixture and supply wires with included silicone-filled wire nuts. Use silicone or electrical tape around wire nuts to ensure proper connection. After joining the wires, secure the mount.

RELAMPING

1. Remove the Housing from the Cap by loosening the two set screws with a 5/64" hex wrench while supporting the Housing. Slide the Housing out of the Cap to expose the lamp.
2. Remove the lamp by pushing it upward and rotating it counterclockwise, then pulling down.
3. Holding the new lamp at its base, align the pins with the slots in the socket, push in, and turn clockwise until it stops.
4. Reattach the Housing by inserting it into the Cap and tightening the set screws.

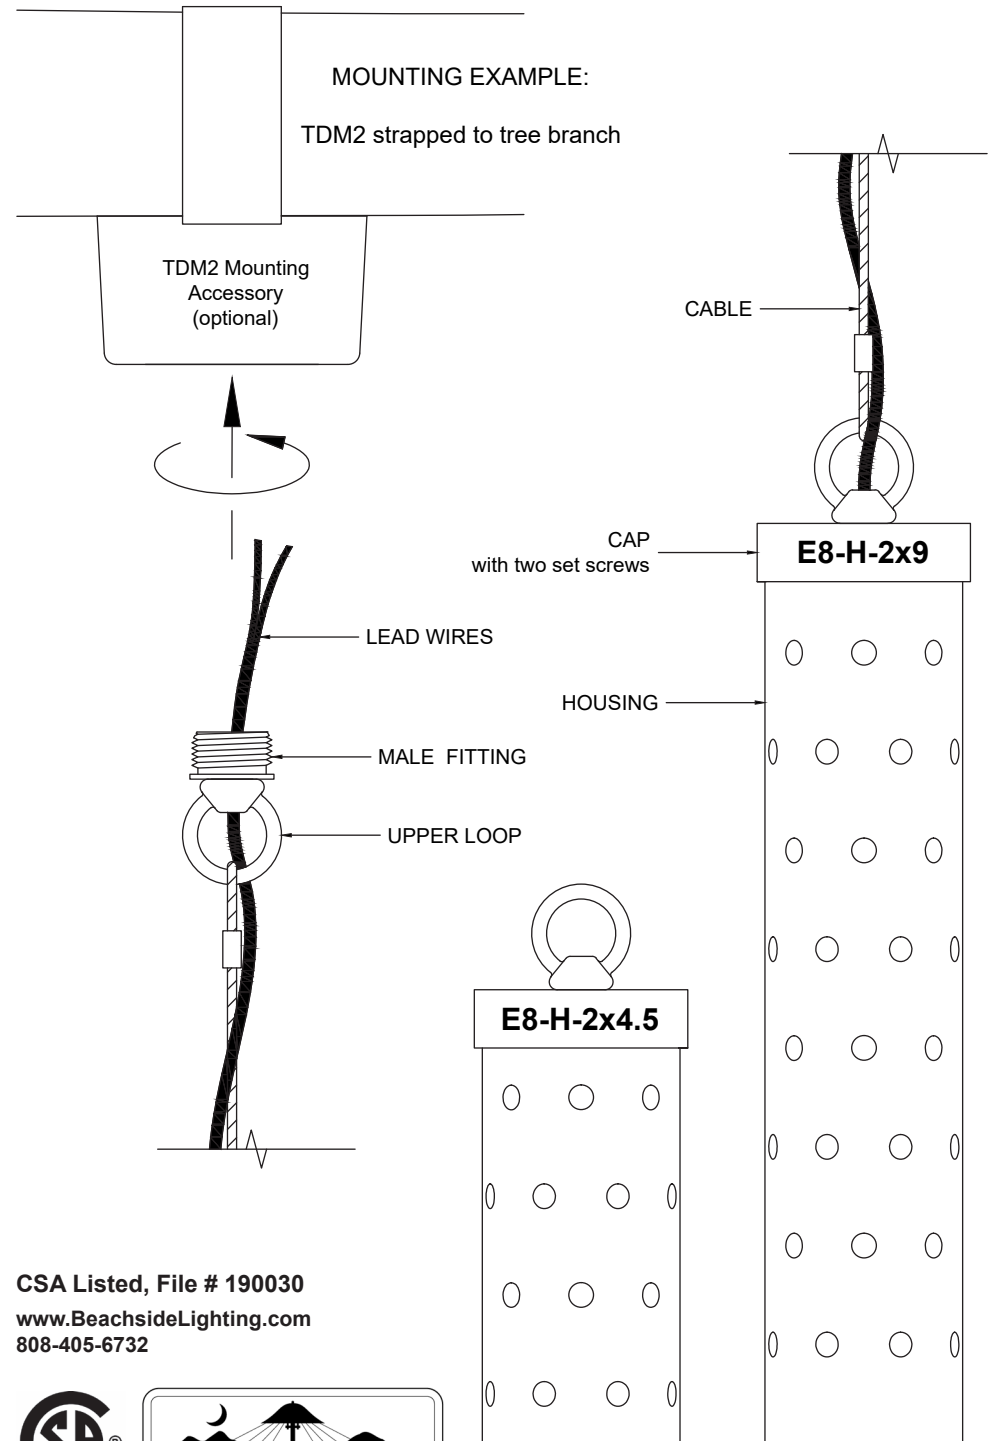

CSA Listed, File # 190030
www.BeachsideLighting.com
808-405-6732

