

L-018

LAMP TYPE: MR16, GU5.3 bi-pin base
Maximum 15 Watts LED, 50 Watts halogen

WARNING — Risk of Electric Shock. Verify that power is OFF before installing this fixture. This fixture must be installed in accordance with the National Electric Code and/or local codes. Failure to do so may result in serious personal injury or death. Wiring must be done by a licensed electrician.

For luminaires equipped with halogen lamps:

INSTRUCTIONS PERTAINING TO A RISK OF FIRE OR INJURY TO PERSONS
IMPORTANT SAFETY INSTRUCTIONS SAVE THESE INSTRUCTIONS
Lighted lamp is HOT!

WARNING – To reduce the risk of FIRE OR INJURY TO PERSONS:

- Turn off/unplug and allow to cool before replacing lamp.
- Lamp gets HOT quickly! Contact only switch/plug when turning on.
- Do not touch hot lens or faceplate.
- Keep lamp away from materials that may burn.
- Do not touch the lamp at any time. Use a soft cloth. Oil from skin may damage lamp.
- Do not operate the luminaire fitting with a missing or damaged faceplate or lens.

This is a low-voltage fixture for use with maximum 25A, 15V power units only. A remote transformer is required. Do not overload the transformer by installing or relamping with higher wattage lamps that together exceed the capacity of the transformer. The unit low-voltage cable shall: a) be protected by routing in close proximity to the luminaire or fitting, or next to a building structure such as a house or deck; b) not be buried except for a maximum 6 inches (15.2 cm) in order to connect to the main low-voltage cable; and c) have the length cut off so that it is connected to a connector within 6 inches (15.2 cm) from a building structure, a luminaire, or fitting. Contact Beachside Lighting for low voltage cable and direct burial wire for use as main secondary wiring. THIS DEVICE IS ACCEPTED AS A COMPONENT OF A LANDSCAPE LIGHTING SYSTEM WHERE THE SUITABILITY OF THE COMBINATION SHALL BE DETERMINED BY CSA OR LOCAL INSPECTION AUTHORITIES HAVING JURISDICTION.


INSTALLATION

This fixture mounts horizontally into a vertical surface. For masonry installation only.

1. Once position in the desired location, pour around the fixture's cast brass Housing. Open end of housing should extend 5/64" past the finish surface so the Faceplate's gasket compresses against the Housing when attached.
2. Four (4) conduit entries are located in the rear and sides of the Housing's internal junction box, accessed by removing the gasketed brass cover. Feed the power supply wires into the box, leaving at least 12" extra length.
3. Use silicone-filled wire nuts (supplied) to join the fixture leads to the power supply wires. Use silicone or electrical tape around the wire nuts to ensure proper connection.
4. Push the connections into the junction box and attach cover.
5. Fasten the brass Faceplate onto Housing using 1/8" hex wrench, compressing gasket to create a seal.

LAMPING

1. Remove Faceplate.
2. Holding the lamp at its base, pull straight up to remove from socket.
3. Holding the new lamp at its base, align the lamp pins with the holes in the socket and insert by pushing straight down.
4. Replace Faceplate, ensuring gasket is contacting the Housing and creating an adequate seal.

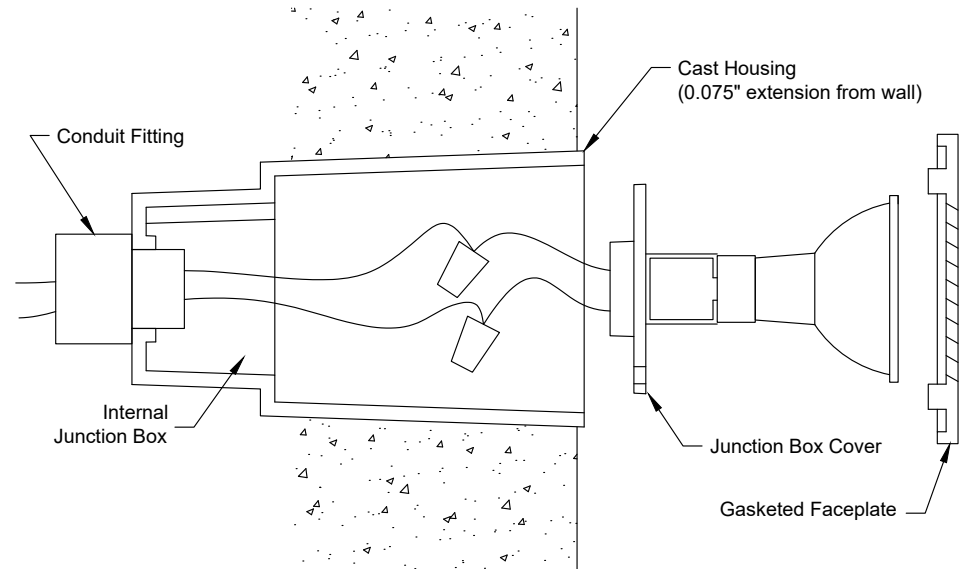

808-405-6732
www.BeachsideLighting.com

CSA Listed, file # 190030