

L-004A

CSA Listed, file # 190030

LAMP TYPE: S-8 type double contact bayonet base incandescent lamp, 26 watt maximum.

INSTRUCTIONS PERTAINING TO A RISK OF FIRE OR INJURY TO PERSONS

IMPORTANT SAFETY INSTRUCTIONS

Lighted lamp is HOT!

WARNING - To reduce the risk of FIRE OR INJURY TO PERSONS:

Turn off/unplug and allow to cool before replacing lamp.

Lamp gets HOT quickly! Contact only switch/plug when turning on.

Do not touch hot lens, guard, or enclosure.

Keep lamp away from materials that may burn.

Do not touch the lamp at any time. Use a soft cloth. Oil from skin may damage lamp.

Do not operate the luminaire fitting with a missing or damaged shield.

SAVE THESE INSTRUCTIONS

INSTALLATION INSTRUCTIONS


This is a low voltage fixture for use with maximum 25A, 15V power units only. A remote transformer is required. Main secondary wiring is intended for shallow burial, less than 6 in., unless suitable for direct burial. Contact Beachside Lighting for direct burial wire for use as main secondary wiring. The fixture shall not be installed within 10 feet of a pool, spa, or fountain.

MOUNTING / WIRING

Verify that power to fixture is off. Due to its light weight, this fixture may be hung directly from its leads. Feed end of wire thru junction box cover or tree mount accessory. Use silicone filled wire nuts to ensure proper connection between fixture wire and wire from power source. Attach junction box cover to junction box or tree mount to tree/overhead structure.

LAMPING

Using a soft cloth, grasp top portion of lamp. Push lamp down into fixture's socket and turn clockwise. Lamp should secure into place.

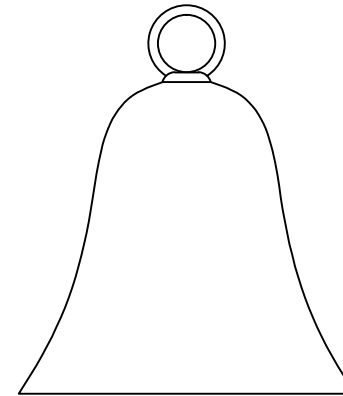

808-405-6732

www.BeachsideLighting.com