

# E2

LOW VOLTAGE ONLY LAMP TYPE: 2, 3, and 4 Watt LED module  
SUITABLE FOR INDOOR OR OUTDOOR USE

## INSTALLATION INSTRUCTIONS

**WARNING** — Risk of Electric Shock. Verify that power is OFF before installing this fixture. This fixture must be installed in accordance with the National Electric Code and/or local codes. Failure to do so may result in serious personal injury or death. Wiring must be done by a licensed electrician.

### INSTRUCTIONS PERTAINING TO A RISK OF FIRE OR INJURY TO PERSONS IMPORTANT SAFETY INSTRUCTIONS

#### SAVE THESE INSTRUCTIONS

This is a low-voltage fixture for use with maximum 25A, 15V power units only. A remote transformer is required. Do not overload the transformer by installing or relamping with higher wattage lamps that together exceed the capacity of the transformer. The low-voltage cable shall: a) be protected by routing in close proximity to the luminaire or fitting, or next to a building structure such as a house or deck; b) not be buried except for a maximum 6 inches (15.2 cm) in order to connect to the main low-voltage cable; and c) have the length cut off so that it is connected to a connector within 6 inches (15.2 cm) from a building structure, a luminaire, or fitting. Contact Beachside Lighting for direct burial wire for use as main secondary wiring.

#### MOUNTING

Fixture is secured by two #8 X 1-1/2" brass wood screws (provided) through the canopy and into the mounting surface.


#### WIRING

1. Verify that the power is off.
2. Pass wire leads through holes in canopy to attach fixture leads to wiring from remote transformer. Use silicone or electrical tape around wire nuts to ensure proper connection.
3. Attach canopy to mounting surface.

#### LAMPING

Consult manufacturer: Beachside Lighting, 1-808-263-5717

MOUNTING  
SURFACE

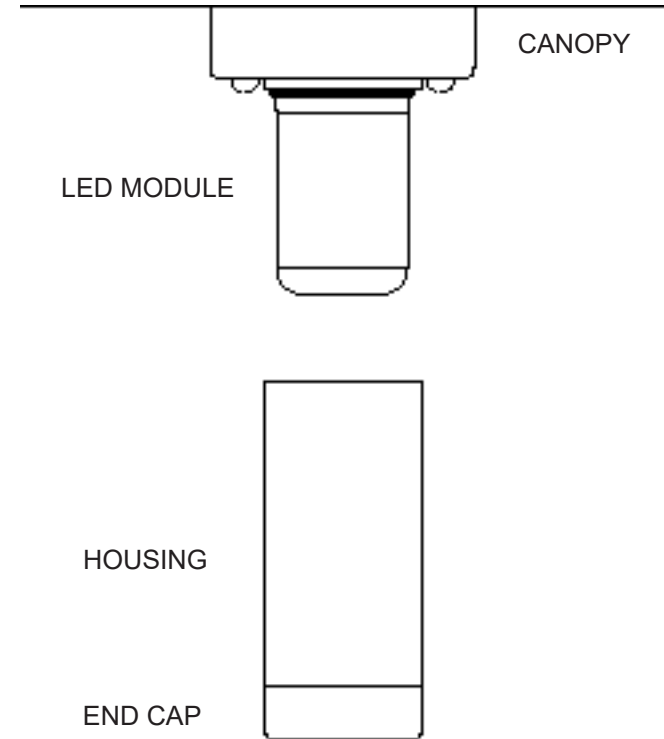

808-405-6732  
www.BeachsideLighting.com

