

# E8-H



SUITABLE FOR  
INDOOR AND  
OUTDOOR USE

The E8-H is an unobtrusive, low-voltage, hanging downlight. Its minimalist design brings attention to the lamp's effect, not to the fixture itself. The E8-H takes advantage of LED modules that can produce a range of beam spreads with just a simple change of our line of field-serviceable optics.

- Construction** All brass components. 1/8" [3mm] thick brass housings.
- Lens** Tempered glass, stepped to prevent pooling of water on lens.
- Mounting** Supplied with 20" stainless steel cable, 36" lead wire, and 1/2" male fitting for mounting accessory. Or the cable can be removed and the fixture hung directly by its loop.
- Voltage** 12 Volts AC / DC with integral driver (9 - 15V input, dimmable below 9V). Remote transformer required.



**Lamps** Triac dimmable: MLV >6% typ., ELV >16% typ.

		Beam/Field	Candela	Lumens	Efficacy	
Cree XPE2 LED 2 Watt AMBER (1503K) TURTLE-FRIENDLY	___ <b>2W-A-SP</b>	10° / 20°	1366	65	29	
	___ <b>2W-A-NFL</b>	14° / 31°	587	64	29	
	___ <b>2W-A-FL</b>	29° / 61°	140	53	24	
	___ <b>2W-A-NO</b>	46° / 114°	15	14	6	
Cree XPE2 LED 2 Watt RED-ORANGE (1000K) TURTLE-FRIENDLY	___ <b>2W-RO-SP</b>	10° / 18°	2841	123	54	
	___ <b>2W-RO-NFL</b>	13° / 28°	1483	119	52	
	___ <b>2W-RO-FL</b>	32° / 56°	229	81	35	
	___ <b>2W-RO-NO</b>	49° / 114°	32	32	14	
Cree XPG2 LED 3 Watt Warm White (3049K)*	___ <b>3W-SP</b>	13° / 24°	2689	202	69	CRI 83
	___ <b>3W-NFL</b>	17° / 37°	1214	177	61	
	___ <b>3W-FL</b>	30° / 62°	395	156	54	
	___ <b>3W-NO</b>	47° / 86°	42	37	13	
Cree XPG2 LED 4 Watt Warm White (3072K)*	___ <b>4W-SP</b>	13° / 24°	3399	249	64	CRI 81
	___ <b>4W-NFL</b>	17° / 38°	1514	230	59	
	___ <b>4W-FL</b>	30° / 62°	492	194	50	
	___ <b>4W-NO**</b>	71° / 121°	55	81	21	

\* Also available in 2700K. Add color suffix to lamp specification, e.g. "3W-NFL-2700K"  
\*\* When 4W lamp is specified with No Optic, only one optical accessory may be used.


**Optical Accessories**

___ <b>CTO-1/4-1.36</b>	Color Temperature Orange filter 1/4
___ <b>CTO-1/2-1.36</b>	Color Temperature Orange filter 1/2
___ <b>CTO-3/4-1.36</b>	Color Temperature Orange filter 3/4
___ <b>FR8</b>	Frosted lens, 1/8" [3mm] thick
___ <b>HL8</b>	Honeycomb louver, 1/8" [3mm] thick
___ <b>KP</b>	Extended snoot
___ <b>PR8</b>	Prismatic spread lens, 1/8" [3mm] thick
___ <b>RT8</b>	Rectilinear spread lens, 1/8" [3mm] thick
___ <b>SL8</b>	Solite (Soft Focus) lens, 1/8" [3mm] thick

Maximum (2) 1/8" thick optical accessories, or (1) 1/8" thick optical accessory with 4W-NO

**Mounting Accessories**

___ <b>CMK</b>	Catenary cable mounting kit
___ <b>TDM1</b>	Brass tree/deck mount with stainless steel screws
___ <b>TDM2-___</b>	Brass tree mount with nylon strap (48, 72, or 96")
___ <b>TDM2SS-___</b>	Brass tree mount with stainless steel strap (48, 72, or 96")
___ <b>TDM3-HANG</b>	Brass low-profile deck/wall mount—for hanging fixtures
___ <b>TDM4-HANG</b>	Brass low-profile tree mount with notch for wire—for hanging fixtures
___ <b>TMJB-___</b>	Brass tree-mounted junction box, single fixture mount, stainless steel strap (48, 72, or 96")
___ <b>TMJBX</b>	Brass tree-mounted junction box, single fixture mount, stainless steel screws

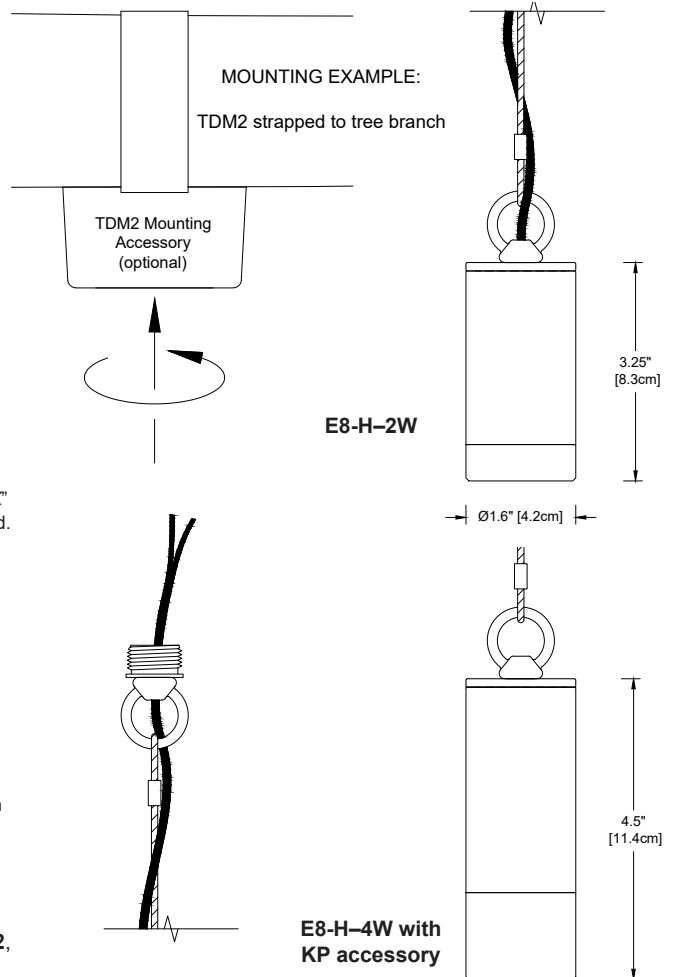

**Finish:** Unfinished is standard; no specification required. The fixture will weather to a natural patina. The patina process is natural with brass and copper. Rate of patina and eventual color is dependent upon climate and proximity to the ocean. Thus, Beachside does not guarantee any specific appearance.

**Weight:** 1.2 lbs [0.5 kg] (excludes Mounting Accessories)

IP 66  
CSA Listed, file #190030  
10 year fixture warranty  
3 year LED module warranty

Project _____	By _____	Date _____
For ordering purposes, please specify (example: <b>E8-H-2W-A-SP-TDM2-72-KP</b> )		
<b>E8-H</b> Fixture _____	Lamp _____	Accessory(ies) _____