

# L-009

The L-009 is a low-voltage, in-grade, brass, uplighting fixture.



**Construction** All brass components. 0.140" [3.6mm] thick brass housing.

**Lens** Tempered glass, stepped to prevent pooling of water on lens.

**Voltage** 12 Volts AC. Remote magnetic transformer required.


**Lamps**

GU 5.3	— <b>ESX</b>	20 Watt	12° spot	320 lm
MR16 Halogen	— <b>FMV</b>	35 Watt	24° narrow flood	320 lm
50 Watts max	— <b>EXN</b>	50 Watt	36° flood	320 lm
	— <b>5W-SP</b>	5 Watt	15° spot	320 lm
	— <b>5W-NFL</b>	5 Watt	25° narrow flood	320 lm
	— <b>5W-FL</b>	5 Watt	40° flood	320 lm
	— <b>5W-FL/60</b>	5 Watt	60° flood	320 lm
	— <b>5W-WFL</b>	5 Watt	100° wide flood	320 lm
GU5.3	— <b>7W-NFL</b>	7 Watt	25° narrow flood	483 lm
MR16 LED	— <b>7W-FL</b>	7 Watt	40° flood	487 lm
Cree chipset (5W)	— <b>7W-WFL</b>	7 Watt	60° wide flood	483 lm
Lumiled chipset (7W)	— <b>8W-SP</b>	8 Watt	10° spot	500 lm
Soraa chipset (8W)	— <b>8W-NFL</b>	8 Watt	25° narrow flood	525 lm
Warm White (3000K)	— <b>8W-FL</b>	8 Watt	36° flood	525 lm


**Accessories**

— <b>BGS9</b>	Brass glare shield
— <b>FR</b>	Frosted lens
— <b>HL2</b>	Honeycomb louver, 1/4" [6mm] thick (1/8" [3mm] thick honeycomb louver is standard)
— <b>PR</b>	Prismatic spread lens
— <b>RT</b>	Rectilinear spread lens
— <b>SL</b>	Solite soft focus lens

**Finish:** Unfinished is standard; no specification required. The fixture will weather to a natural patina. The patina process is natural with brass and copper. Rate of patina and eventual color is dependent upon climate and proximity to the ocean. Thus, Beachside does not guarantee any specific appearance.

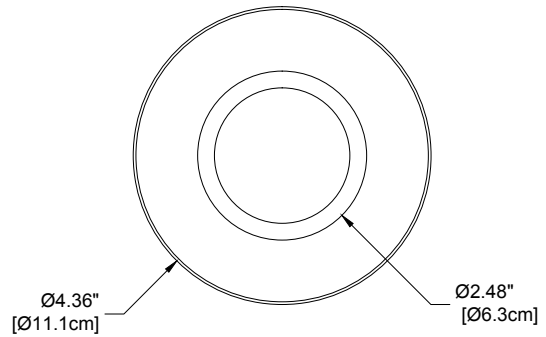

**CAST BRASS FACEPLATE**

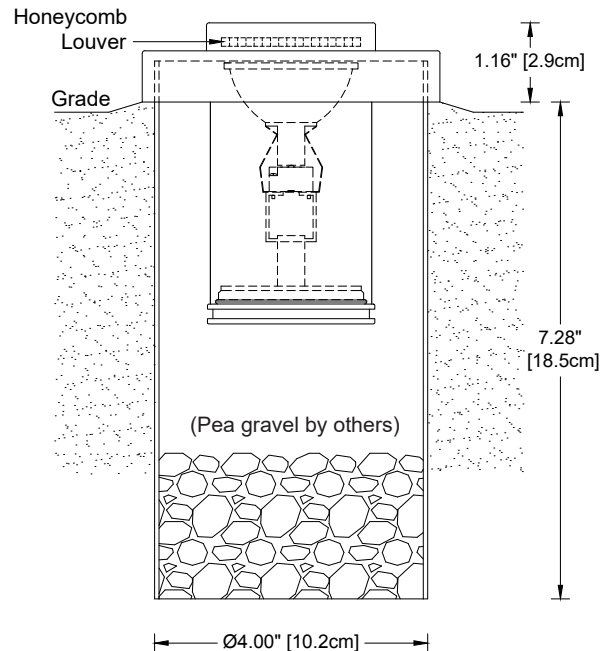

**BRASS HOUSING AND COMPONENTS**

**Weight:** 5.2 lbs. [2.4 kg]

IP 66  
 CSA Listed, file #190030  
 10 year fixture warranty  
 3 year warranty on MR16 LED lamps

**MADE IN USA**

Project	By	Date
For ordering purposes, please specify (example: <b>L-009—5W-SP—HL2</b> )		
<b>L-009</b>	—	—
Fixture	Lamp	Accessory(ies)