

# R-SERIES

Includes models R-003, R-003A, R-005, R-005A, R-007, R-008 and R-019.

LAMP: G4, LED and Xenon, 35 Watts maximum  
G4/G6.35/GY6.35, Halogen, 50 Watts maximum

INSTRUCTIONS PERTAINING TO A RISK OF FIRE OR INJURY TO PERSONS

## IMPORTANT SAFETY INSTRUCTIONS

Lighted Lamp is HOT!

WARNING - To reduce the risk of FIRE OR INJURY TO PERSONS:

- Turn off/unplug and allow to cool before replacing lamp.
- Lamp gets HOT quickly! Contact only switch/plug when turning on.
- Do not touch hot lens, guard, or enclosure.
- Keep lamp away from materials that may burn.
- Do not touch the lamp at any time. Use a soft cloth. Oil from skin may damage lamp.
- Do not operate the luminaire fitting with a missing or damaged shield.

SAVE THESE INSTRUCTIONS

### INSTALLATION INSTRUCTIONS

This is a low voltage fixture for use with maximum 25A, 15V power units only. A remote transformer is required. Main secondary wiring is intended for shallow burial, less than 6 in., unless suitable for direct burial. Contact Beachside Lighting for direct burial wire for use as main secondary wiring. The fixture shall not be installed within 10 feet of a pool, spa, or fountain.

#### MOUNTING

This fixture is to be mounted on either an anchored junction box or in-ground mounting spike. Thread fixture's stem into either the junction box or ground spike cover. The bottom of the stem must be turned fully clockwise to help ensure stability.



#### WIRING

Verify that power to fixture is off. Use silicone filled wire nuts to ensure proper connection between fixture wire and wire from power source. Push connections into junction box or ground spike before reattaching cover.

#### LAMPING

Grasp the fixture body under the shade and below the glass shield and turn it counterclockwise. The housing will unscrew at its base. Holding the lamp at its base, pull up to remove. Holding the new lamp at its base, insert the pins fully into the socket. Screw the housing back onto the fixture base. Do not overtighten.

CSA Listed, file # 190030

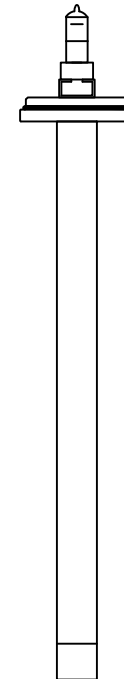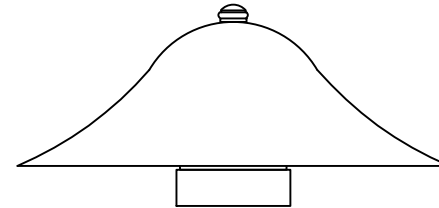

R-003 shown



808-405-6732  
www.BeachsideLighting.com