

L-009

The -009 is a low-voltage, in-grade, brass uplighting fixture.

Construction All brass components. 0.140" [3.6mm] thick brass housing.


Lens Tempered glass, stepped to prevent pooling of water on lens.

Voltage 12 Volts AC. Remote magnetic transformer required.


Lamps	GU5.3 MR16			
	— 5W-SP	5 Watt	15° spot	320 lm
	— 5W-NFL	5 Watt	25° narrow flood	320 lm
	— 5W-FL	5 Watt	40° flood	320 lm
	— 5W-FL/60	5 Watt	60° flood	320 lm
	— 5W-WFL	5 Watt	100° wide flood	320 lm
LED				
	— 7W-NFL	7 Watt	25° narrow flood	483 lm
Cree chipset (5W)	— 7W-FL	7 Watt	40° flood	487 lm
Lumiled chipset (7W)	— 7W-WFL	7 Watt	60° wide flood	483 lm
Soraa chipset (8W)	— 8W-SP	8 Watt	10° spot	500 lm
Warm White (3000K)	— 8W-NFL	8 Watt	25° narrow flood	525 lm
	— 8W-FL	8 Watt	36° flood	525 lm

Accessories	— BGS9	Brass glare shield
	— FR	Frosted lens
	— HL2	Honeycomb louver, 1/4" [6mm] thick (1/8" [3mm] thick honeycomb louver is standard)
	— PR	Prismatic spread lens
	— RT	Rectilinear spread lens
	— SL	Solite soft focus lens

Finish: Unfinished is standard; no specification required. The fixture will weather to a natural patina. The patina process is natural with brass and copper. Rate of patina and eventual color is dependent upon climate and proximity to the ocean. Thus, Beachside does not guarantee any specific appearance.

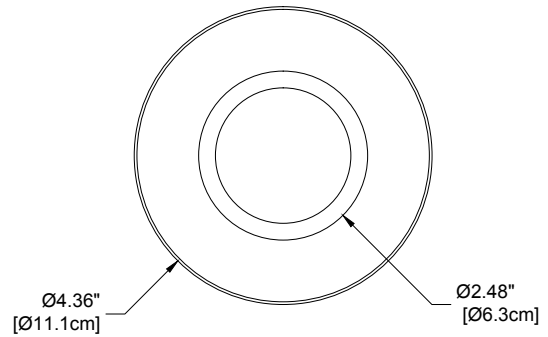

CAST BRASS FACEPLATE

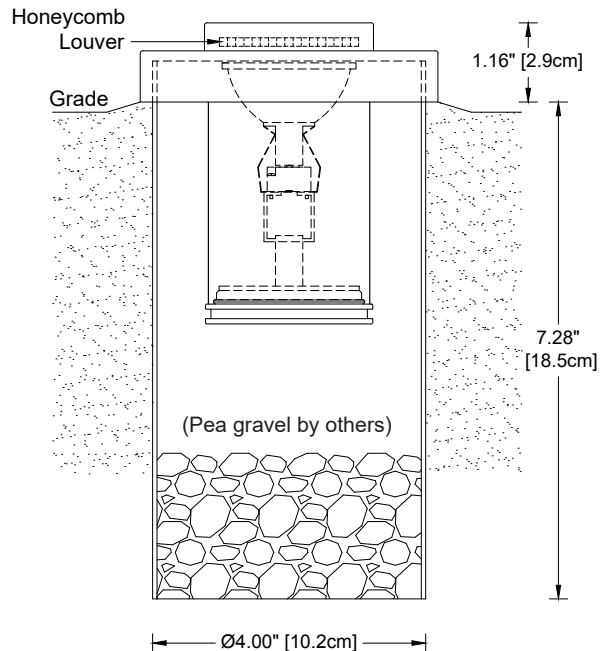

BRASS HOUSING AND COMPONENTS

Weight: 5.2 lbs / 2.4 kg

IP66
10 year fixture warranty
3 year warranty on MR16 LED lamps



Project	By	Date
For ordering purposes, please specify (example: L-009—5W-SP—HL2)		
L-009	—	—
Fixture	Lamp	Accessory(ies)