

L-013-S-120V

LAMP TYPE: 12V MR16, GU10 bi-pin base
Maximum 20 Watts LED, 50 Watts halogen
SUITABLE FOR WET LOCATIONS

WARNING — Verify that power is OFF before installing this fixture. This fixture must be installed in accordance with national and/or local electric codes. Failure to do so may result in serious personal injury or death. Wiring must be done by a licensed electrician.

INSTALLATION

If your fixture is equipped with the Square Canopy (SQ) option, use the instructions in the next section titled "INSTALLATION WITH 2-PIECE SQUARE CANOPY". If the Canopy is removed from the stem, silicone RTV must be applied where the stem meets the canopy upon reinstallation.

1. Verify that the power is off.
2. Hold the canopy against the junction box to check the orientation of the holes. It may be necessary to use the included universal crossbar to achieve proper orientation. If the junction box's screw holes are spaced at 2-3/4" instead of 3-1/2", use of the crossbar is required.
3. Pass the wire leads from the fixture through the center hole of the canopy gasket (supplied) and the crossbar (if used).
4. Use the supplied wire nuts to join the fixture leads to the power supply wires as shown in the diagram: black lead connects to hot, white to neutral, and green to ground. Use silicone or electrical tape around the wire nuts to ensure proper connection.
5. Push the connections into the junction box.
6. If using the crossbar, attach it to the junction box now.
7. Attach canopy to junction box with the supplied screws, making sure that the gasket is consistently between junction box and canopy.


INSTALLATION WITH 2-PIECE SQUARE CANOPY

1. Verify that the power is off and pass the supply wires from the remote transformer through one of the gaskets and through the Back Plate from the flat side.
2. Use the included machine screws to secure the Back Plate to the junction box, being sure to line up the holes in the gasket and the Back Plate.
3. Pass the wires through the second gasket and use the supplied silicone-filled wire nuts to join the fixture leads to the supply wires. Use silicone or electrical tape around the wire nuts to ensure proper connection.
4. Push the connections into the junction box and tuck the second gasket into the back of the Canopy.
5. Place the fixture so the square Canopy fits completely over the Back Plate and secure the Canopy to the Back Plate by evenly tightening the two set screws in the sides of the Canopy.

CSA Listed, file # 190030

RELAMPING

1. The lens/cap assembly is permanently attached to the housing. Do not attempt to unscrew this piece.
2. Turn the brass lamp compartment housing counterclockwise. The housing will unscrew at its base.
3. Holding the lamp at its base, rotate it almost 1/4 turn counterclockwise and pull up to remove.
4. Holding the new lamp at its base, insert the pins into the socket and turn clockwise until it stops.
5. Screw the housing back onto the fixture base. Do not overtighten.

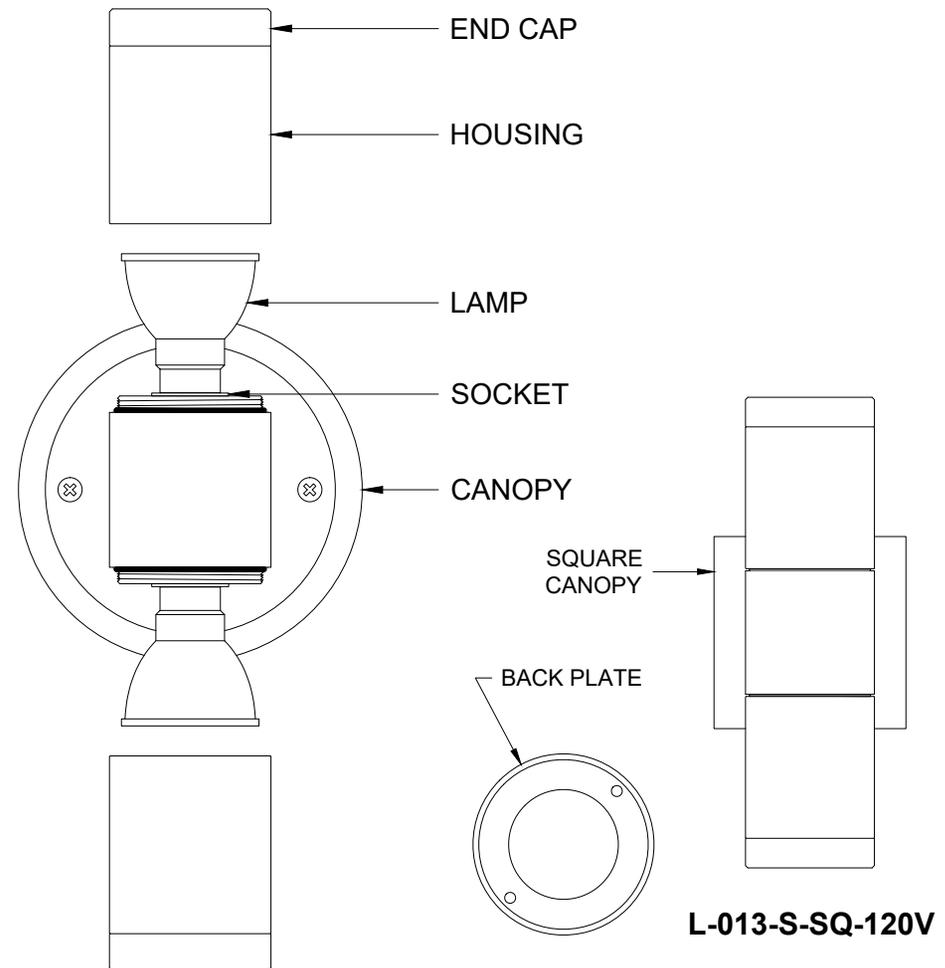

808-405-6732

www.BeachsideLighting.com

