

# L-011-S

The L-011-S is an unobtrusive, directional fixture on a brass riser. It can be aimed up or down and is ideal for tall ground cover.

**Construction** All brass components. 0.140" [3.6mm] thick brass housing. 1/2" schedule 40 brass stem.

**Lens** Tempered soda lime glass. Stepped to prevent pooling.

**Stem Height** Custom stem heights are available upon request. Standard stem heights are:

- 8 8" [20 cm]
- 12 12" [30 cm]
- 16 16" [40 cm]
- 20 20" [51 cm]

**L-011-S** 12 Volts, Remote transformer required  
50W max halogen, 15W max LED

	— 5W-SP	5 Watt	15° spot	320 lm
	— 5W-NFL	5 Watt	25° narrow flood	320 lm
	— 5W-FL	5 Watt	40° flood	320 lm
	— 5W-FL/60	5 Watt	60° flood	320 lm
	— 5W-WFL	5 Watt	100° wide flood	320 lm
GU5.3, MR16 LED	— 7W-NFL	7 Watt	25° narrow flood	483 lm
Cree chipset (5W)	— 7W-FL	7 Watt	40° flood	487 lm
Lumiled chipset (7W)	— 7W-WFL	7 Watt	60° wide flood	483 lm
Soraa chipset (8W)	— 8W-SP	8 Watt	10° spot	600 lm
Warm White (3000K)	— 8W-NFL	8 Watt	25° narrow flood	630 lm
	— 8W-FL	8 Watt	36° flood	630 lm

**L-011-S-120V** 120 Volts  
**L-011-S-230V** 230 Volts

MR16 LED	— 5W-NFL	5 Watt	25° narrow flood
Cree chipset, GU10	— 5W-FL	5 Watt	40° flood
Warm White (3000K)	— 5W-WFL	5 Watt	100° wide flood
MR16 LED	— 8W-SP	8 Watt	10° spot
Soraa chipset, GU10	— 8W-NFL	8 Watt	25° narrow flood
Warm White (3000K)	— 8W-FL	8 Watt	36° flood
	— 8W-WFL	8 Watt	60° wide flood


**Optical Accessories**

- BGS Brass glare shield, 45° cutoff
- BGSF Brass glare shield, full cutoff with weep hole
- FR Frosted lens
- HL1 Honeycomb louver, 1/8" [3mm] thick
- HL2 Honeycomb louver, 1/4" [6mm] thick
- PR Prismatic spread lens
- RT Rectilinear spread lens
- SL Solite lens

**Mounting Accessories** 1/2" male threads. Mounts into any standard j-box or:

- GS2 Heavy-duty ground spike
- GS2BC Heavy-duty ground spike with cast brass cap
- GS3R Heavy-duty ground spike with brass cap for telescoping fixture riser
- GS4 \* Standard ground spike with cast brass cap
- JB Cast brass junction box

\* This accessory for 12 Volt fixture only.

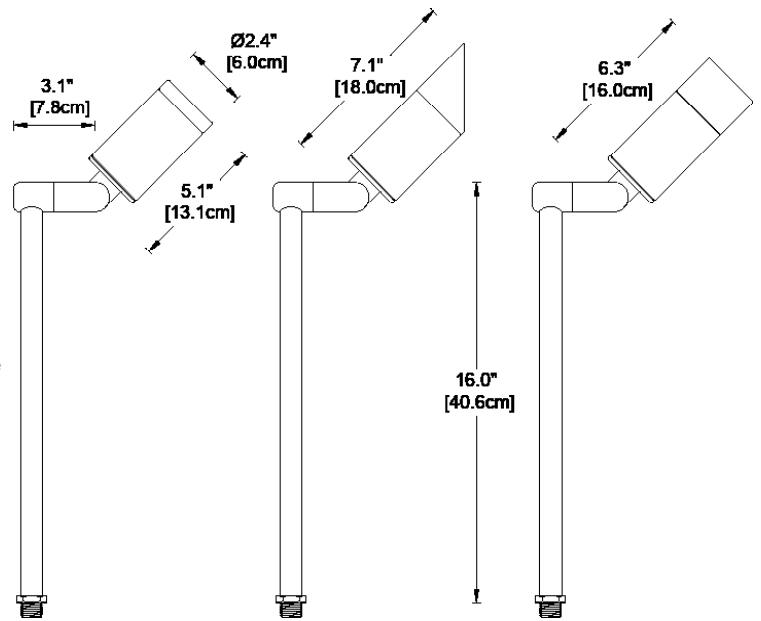

L-011-S

L-011-S with BGS

L-011-S with BGSF

Fixtures shown with 16" stems

**Finish:** Unfinished is standard; no specification required. The fixture will weather to a natural patina. The patina process is natural with brass and copper. Rate of patina and eventual color is dependent upon climate and proximity to the ocean. Thus, Beachside does not guarantee any specific appearance.

IP 66  
CSA Listed, file #190030  
10 year fixture warranty  
3 year warranty for MR16 LED lamps

**Weight:** 4.0 lbs [1.8 kg] with 16" stem

**MADE IN USA**

Project	By	Date
For ordering purposes, please specify (example: L-011-S-120V-16-5W-NFL-GS2-BGS-HL1)		
<b>L-011-S-</b>		
Fixture	Stem Height	Lamp
		Accessory
		Accessory