

# L-018

The L-018 is a cast brass, recessed steplight with louvers angled at 30° to eliminate glare. Minimal 0.2" extension from wall. Available for 12 Volt and 120 Volt applications.



**Construction** Cast brass components

**Lenses**  **FR** Tempered, frosted glass  
 **RT** Tempered, rectilinear spread lens

**Mounting** For masonry (non-combustible) installation only

## Voltage / Lamp Options

**12V** GU5.3 • MR16 • Remote transformer required

<input type="checkbox"/>	<b>JR-10/32</b>	10 Watt Halogen	32° flood
<input type="checkbox"/>	<b>ESX</b>	20 Watt Halogen	12° spot
<input type="checkbox"/>	<b>BBF</b>	20 Watt Halogen	24° narrow flood
<input type="checkbox"/>	<b>BAB</b>	20 Watt Halogen	36° flood
<input type="checkbox"/>	<b>FMT</b>	35 Watt Halogen	12° spot
<input type="checkbox"/>	<b>FMV</b>	35 Watt Halogen	24° narrow flood
<input type="checkbox"/>	<b>FMW</b>	35 Watt Halogen	36° flood
<input type="checkbox"/>	<b>EXT</b>	50 Watt Halogen	12° spot
<input type="checkbox"/>	<b>EXZ</b>	50 Watt Halogen	24° narrow flood
<input type="checkbox"/>	<b>EXN</b>	50 Watt Halogen	36° flood

Cree LED chipset  **5W-A-NFL** 5 Watt Amber 25° narrow flood  
**Amber (1500K)** **TURTLE FRIENDLY**

<input type="checkbox"/>	<b>5W-SP</b>	5 Watt	15° spot	320 lm
<input type="checkbox"/>	<b>5W-NFL</b>	5 Watt	25° narrow flood	320 lm
<input type="checkbox"/>	<b>5W-FL</b>	5 Watt	40° flood	320 lm
<input type="checkbox"/>	<b>5W-FL/60</b>	5 Watt	60° flood	320 lm
<input type="checkbox"/>	<b>5W-WFL</b>	5 Watt	100° wide flood	320 lm

Cree LED chipset  
Warm White (3000K)

<input type="checkbox"/>	<b>7W-NFL</b>	7 Watt	25° narrow flood	483 lm
<input type="checkbox"/>	<b>7W-FL</b>	7 Watt	40° flood	487 lm
<input type="checkbox"/>	<b>7W-WFL</b>	7 Watt	60° wide flood	483 lm
<input type="checkbox"/>	<b>8W-SP</b>	8 Watt	10° spot	500 lm
<input type="checkbox"/>	<b>8W-NFL</b>	8 Watt	25° narrow flood	525 lm
<input type="checkbox"/>	<b>8W-FL</b>	8 Watt	36° flood	525 lm

LED  
Warm White (3000K)  
Lumiled chipset (7W)  
Soraal chipset (8W)

**120V** GU10 • MR16

Cree chipset  **5W-A-NFL** 5 Watt LED 25° narrow flood  
**Amber (1500K)** **TURTLE FRIENDLY**

<input type="checkbox"/>	<b>5W-NFL</b>	5 Watt LED	25° narrow flood
<input type="checkbox"/>	<b>5W-FL</b>	5 Watt LED	40° flood
<input type="checkbox"/>	<b>5W-WFL</b>	5 Watt LED	100° wide flood


Cree chipset  
Warm White (3000K)

<input type="checkbox"/>	<b>8W-SP</b>	8 Watt LED	10° spot
<input type="checkbox"/>	<b>8W-NFL</b>	8 Watt LED	25° narrow flood
<input type="checkbox"/>	<b>8W-FL</b>	8 Watt LED	36° flood

Soraa chipset  
Warm White (3000K)


**Accessory**  **HL-MR16** Lamp-attached honeycomb louver, 1/8" [3mm] thick

5.3" [13.3cm]

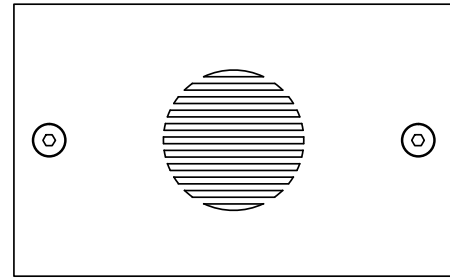

3.3" [8.3cm]

5.0" [12.6cm]

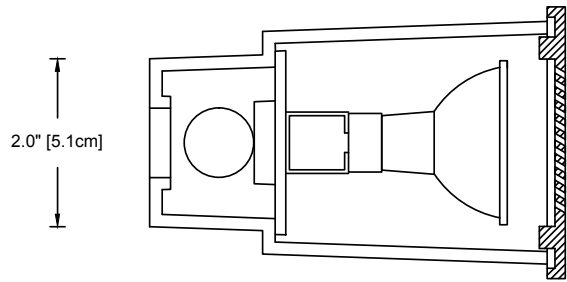

2.0" [5.1cm]

3.3" [8.3cm]

0.2" [0.6cm]

**Finish:** Unfinished is standard; no specification required. The fixture will weather to a natural patina. The patina process is natural with brass and copper. Rate of patina and eventual color is dependent upon climate and proximity to the ocean. Thus, Beachside does not guarantee any specific appearance.

CSA Listed, file #190030  
10 year fixture warranty  
3 year warranty on MR16 LED lamps

**MADE IN USA**

Project	By	Date
For ordering purposes, please specify (example: <b>L-018-120V—5W-NFL—HL-MR16</b> )		
<b>L-018-</b>	Lamp	Accessory
Fixture		