

# R-021

CSA Listed, file # 190030

**LAMP TYPE:** GY6.35 bi-pin halogen lamp, 50 watt maximum. G4 bi-pin xenon lamp, 20 watt maximum.

## INSTRUCTIONS PERTAINING TO A RISK OF FIRE OR INJURY TO PERSONS

# IMPORTANT SAFETY INSTRUCTIONS

Lighted lamp is HOT!

**WARNING** - To reduce the risk of FIRE OR INJURY TO PERSONS:

Turn off/unplug and allow to cool before replacing lamp.

Lamp gets HOT quickly! Contact only switch/plug when turning on.

Do not touch hot lens, guard, or enclosure.

Keep lamp away from materials that may burn.

Do not touch the lamp at any time. Use a soft cloth. Oil from skin may damage lamp.

Do not operate the luminaire fitting with a missing or damage shield.

### SAVE THESE INSTRUCTIONS

## INSTALLATION INSTRUCTIONS

This is a low voltage fixture for use with maximum 25A, 15V power units only. A remote transformer is required. Main secondary wiring is intended for shallow burial, less than 6 in., unless suitable for direct burial. Contact Beachside Lighting for direct burial wire for use as main secondary wiring. The fixture shall not be installed within 10 feet of a pool, spa, or fountain.

### MOUNTING

This fixture is to be place inside/under a decorative lantern fixture for interior illumination.

### WIRING



Verify that power to fixture is off. Use silicone filled wire nuts to ensure proper connection between fixture wire and wire from power source.

### LAMPING

Grasping the fixture by the threaded brass fitting (bellow glass), turn counterclockwise to remove glass assembly.

Using a soft cloth, grasp top portion of lamp. Carefully push lamp pins all the way down into socket. Lamp should secure into place.

Thread assembly back onto base. Do not over tighten.

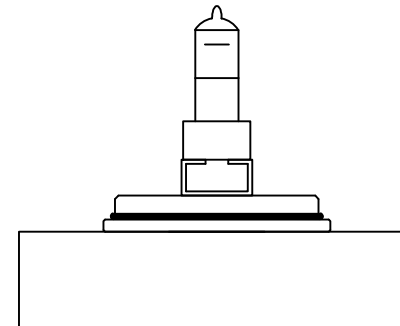

808-405-6732

[www.BeachsideLighting.com](http://www.BeachsideLighting.com)