

MB7

The MB7 is a classic-style bollard for concrete installation. MB-series bollards set the standard for durable, corrosion-resistant walkway lighting. The lamp is protected by a threaded glass lens. An internal brass collar with stainless steel mounting hardware helps ensure stability.



Wildlife Lighting
Certification Number
2018-029



Construction Cast brass shade and louver assembly. 4" diameter brass tube x 0.090" wall thickness. (10.2 cm x 2.3 mm)

Mounting Concrete-mounted fixture uses 3/8" stainless steel anchor bolts through an internal brass mounting collar. Stainless steel hex nuts and washers below collar allow for levelling.

Lens Vapor-proof, tempered glass with threaded fitter.

Shaft Height

— 4	4" [10 cm]
— 12	12" [30 cm]
— 28	28" [71 cm] Standard

Voltage / Lamp Options

12V MR16 LED • GU5.3 • Remote transformer required


Cree chipset **5W-A** 5 Watt Amber (1500K)

120V / 230V MR16 LED • GU10

Cree chipset **5W-A** 5 Watt Amber (1500K)

Accessory — **HSM-LED** Half shield for 180° illumination

Finish: Unfinished is standard; no specification required. The fixture will weather to a natural patina. The patina process is natural with brass and copper. Rate of patina and eventual color is dependent upon climate and proximity to the ocean. Thus, Beachside does not guarantee any specific appearance.

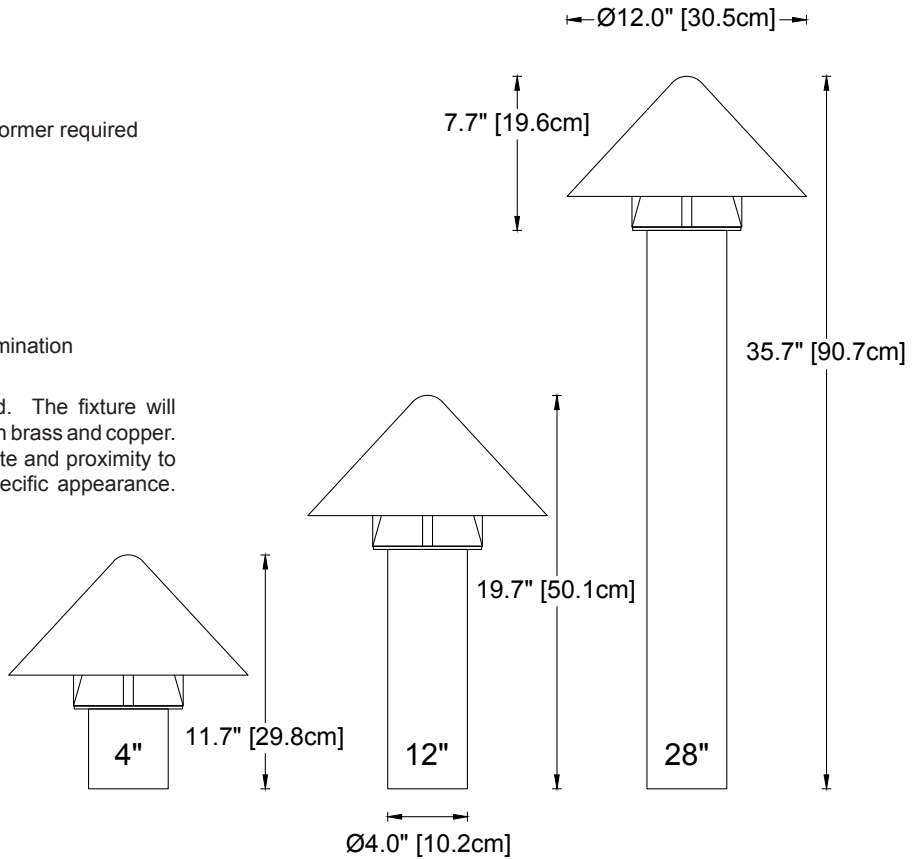

Weight: 30 lbs / 13.6 kg (28" shaft)

IP66
CSA Listed, file # 190030
10 year fixture warranty
3 year warranty on MR16 LED lamps

MADE IN USA

MB7 Footcandles at Radius from Fixture Base with Standard 28" Shaft Height

Lamp	1' / 30cm	2' / 61cm	3' / 91cm	4' / 122cm	5' / 152cm	6' / 183cm	7' / 213cm	8' / 244cm	9' / 274cm	10' / 305cm
5W-A	0.15	0.19	0.23	0.21	0.16	0.10	0.06	0.02	N/A	N/A

Project _____	By _____	Date _____
For ordering purposes, please specify (example: MB7—28—12V—5W-A—HSM-LED)		
MB7	5W-A	HSM-LED
Fixture	Shaft Height	Accessory