

# R-007

The R-007 pathlight is a durable fixture made from brass and copper. It is ideal for walkway and area lighting in any landscape theme and location.



**Construction** All brass components. 1/2" schedule 40 brass stem. 18-gauge copper shade, underside powdercoated white.

**Lens** Tempered, frosted glass

**Voltage** 12 Volts AC, Remote transformer required

**Stem Height** 12 inches is standard. Available stem heights:

- 8 8" [20 cm]
- 12 12" [30 cm]
- 16 16" [40 cm]
- 20 20" [51 cm]

Custom heights upon request

**Lamps**

- **3W-G4** 3 Watt LED Warm White (2800K)
- G4 base — **10X** 10 Watt Xenon
- 35 Watts maximum — **15X** 15 Watt Xenon
- **20X** 20 Watt Xenon
- G4 / G6.35 / GY6.35 — **10H** 10 Watt Halogen
- 50W maximum — **20H** 20 Watt Halogen
- (CSA listed for 35W max in Canada) — **35H** 35 Watt Halogen
- **50H** 50 Watt Halogen


**Optical Accessories** — **HSR** Half shield for 180° illumination

- Mounting Accessories** 1/2" male threads. Mounts into any standard j-box or:
- **GS2** Heavy-duty ground spike
  - **GS2BC** Heavy-duty ground spike with cast brass cap
  - **GS3R** Heavy-duty ground spike with brass cap for telescoping riser
  - **GS4** Standard ground spike with cast brass cap
  - **JB** Cast brass junction box

**Finish:** Unfinished is standard; no specification required. The fixture will weather to a natural patina. The patina process is natural with brass and copper. Rate of patina and eventual color is dependent upon climate and proximity to the ocean. Thus, Beachside does not guarantee any specific appearance.

**Weight:** 2.9 lbs [1.3 kg]

IP66  
CSA Listed, file #190030  
10 year fixture warranty

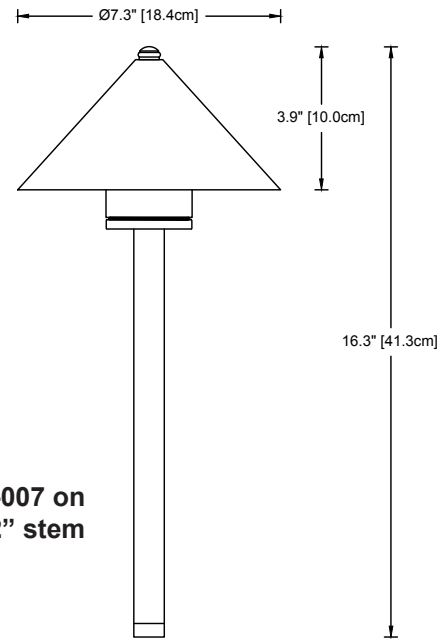

R-007 on 12" stem

**MADE IN USA**

**R-007 Horizontal Footcandles at Radius from Fixture base with Standard 12" Stem Height**

| Lamp         | 1' / 0.3m | 2' / 0.6m | 3' / 0.9m | 4' / 1.2m | 5' / 1.5m | 6' / 1.8m |
|--------------|-----------|-----------|-----------|-----------|-----------|-----------|
| <b>3W-G4</b> | 3.32      | 1.73      | 0.85      | 0.34      | 0.15      | 0.08      |
| <b>10X</b>   | 2.50      | 1.57      | 0.74      | 0.21      | 0.10      | 0.06      |
| <b>15X</b>   | 3.42      | 2.00      | 1.07      | 0.38      | 0.17      | 0.09      |
| <b>20X</b>   | 4.55      | 2.69      | 1.32      | 0.42      | 0.18      | 0.10      |
| <b>10H</b>   | 2.78      | 1.32      | 0.60      | 0.19      | 0.10      | 0.06      |
| <b>20H</b>   | 5.73      | 2.98      | 1.46      | 0.58      | 0.25      | 0.14      |
| <b>35H</b>   | 11.42     | 5.69      | 2.86      | 0.98      | 0.49      | 0.31      |
| <b>50H</b>   | 16.50     | 8.60      | 3.27      | 1.42      | 0.64      | 0.33      |

Project \_\_\_\_\_ By \_\_\_\_\_ Date \_\_\_\_\_

For ordering purposes, please specify (example: **R-007—12—20H—HSR—GS2**)

**R-007** \_\_\_\_\_  
Fixture Stem Height Lamp Accessory(ies)