

# L-011-CM

**LAMP TYPE: 12V MR16, GU5.3 bi-pin base**

**Maximum 15 Watts LED, 35 Watts halogen (indoor or outdoor use) or 50 Watts halogen (outdoor only)**



**WARNING** — Risk of Electric Shock. This is a low-voltage fixture for use with maximum 25A, 15V power units only. A remote transformer is required. Verify that power is OFF before installing this fixture. This fixture must be installed in accordance with the National Electric Code and/or local codes. Failure to do so may result in serious personal injury or death. Wiring must be done by a licensed electrician.

## INSTALLATION

1. Verify that the power is off.
2. Hold the canopy against the junction box to check the orientation of the holes. It may be necessary to use the included universal crossbar to achieve proper orientation. If the junction box's screw holes are spaced at 2-3/4" instead of 3-1/2", use of the crossbar is required.
3. Pass the wire leads from the fixture through the center hole of the canopy gasket (supplied) and the crossbar (if used).
4. Use wire nuts to join fixture leads to wiring from remote transformer.
5. Use silicone or electrical tape around wire nuts to ensure proper connection.
6. Push the connections into the junction box.
7. If using the crossbar, attach it to the junction box now.
8. Attach canopy to junction box with the supplied screws.
9. Make sure that the gasket is consistently between junction box and canopy.

## RELAMPING

1. The lens/cap assembly is permanently attached to the housing. Do not attempt to unscrew this piece.
2. Turn the brass lamp compartment housing counterclockwise. The housing will unscrew at its base.
3. Holding the lamp at its base, pull straight up to remove from socket.
4. Holding the new lamp at its base, align the lamp pins with the holes in the socket and insert by pushing straight down.
5. Screw the housing back onto the fixture base. Do not overtighten.

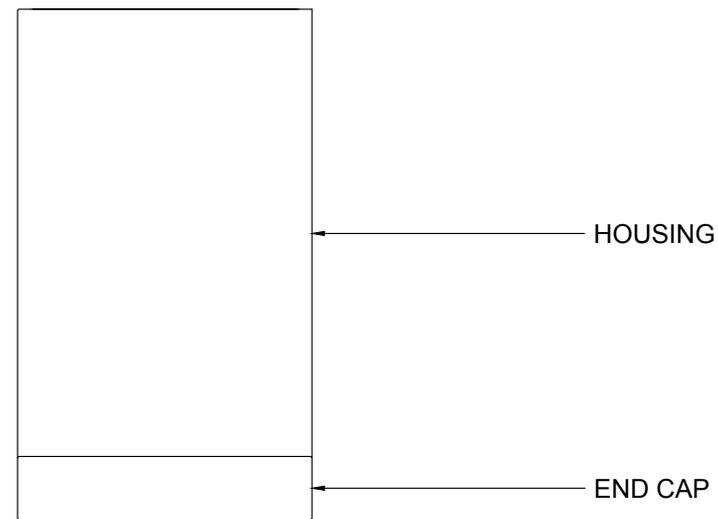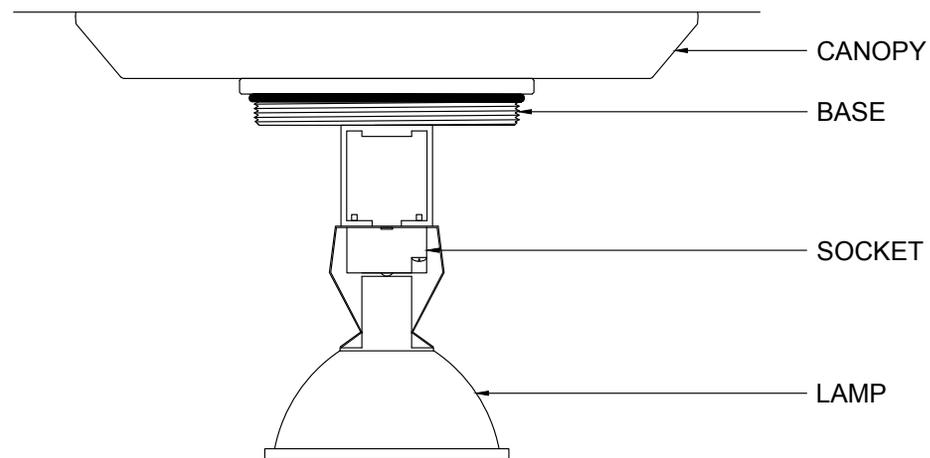

808-405-6732

[www.BeachsideLighting.com](http://www.BeachsideLighting.com)

CSA Listed, file # 190030