

# L-014-S-120V

**LAMP TYPE: MR16, GU10 bi-pin base**  
**Maximum 20 Watts LED, 50 Watts halogen**  
**SUITABLE FOR WET LOCATIONS**



**WARNING** — Verify that power is OFF before installing this fixture. This fixture must be installed in accordance with national and/or local electric codes. Failure to do so may result in serious personal injury or death. Wiring must be done by a licensed electrician.

## INSTALLATION

1. Verify that the power is off.
2. Hold the canopy against the junction box to check the orientation of the holes. It may be necessary to use the included universal crossbar to achieve proper orientation. If the junction box's screw holes are spaced at 2-3/4" instead of 3-1/2", use of the crossbar is required.
3. Pass the wire leads from the fixture through the center hole of the canopy gasket (supplied) and the crossbar (if used).
4. Use the supplied wire nuts to join the fixture leads to the power supply wires as shown in the diagram: black lead connects to hot, white to neutral, and green to ground. Use silicone or electrical tape around the wire nuts to ensure proper connection. Push the connections into the junction box.
5. If using the crossbar, attach it to the junction box now.
6. Attach canopy to junction box with the supplied screws, making sure that the gasket is consistently between junction box and canopy.

## RELAMPING

1. The lens/cap assembly is permanently attached to the housing. Do not attempt to unscrew this piece.
2. Turn the brass lamp compartment housing counterclockwise. The housing will unscrew at its base.
3. Holding the lamp at its base, pull straight up to remove from socket.
4. Holding the new lamp at its base, align the lamp pins with the holes in the socket and insert by pushing straight down.
5. Screw the housing back onto the fixture base. Do not overtighten.

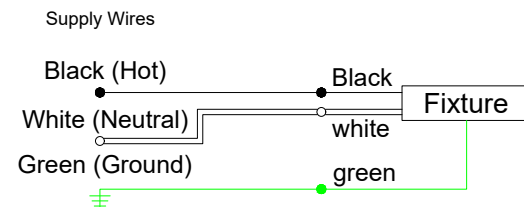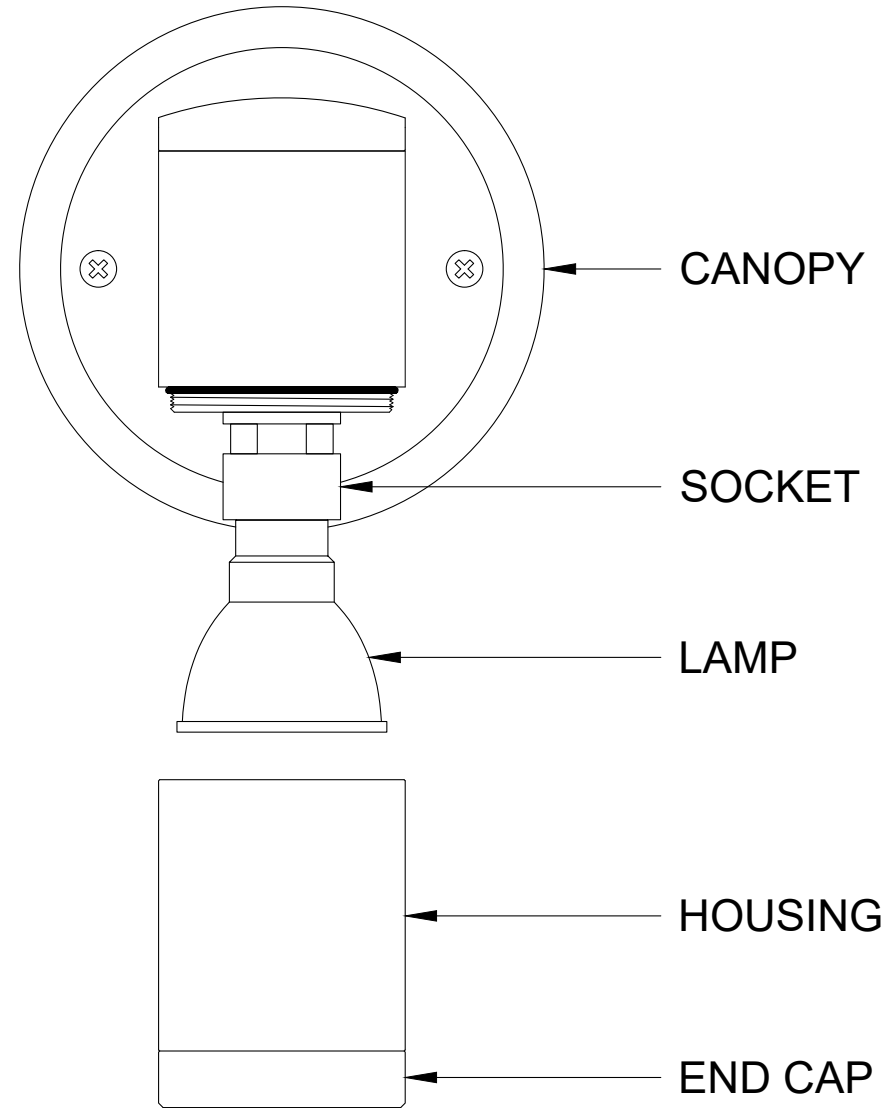

808-405-6732

www.BeachsideLighting.com

CSA Listed, file # 190030