

# E1-S-DD

The E1-S-DD is a low-voltage pathlight that utilizes a gobo in conjunction with the slotted end cap to produce a decorative downlighting effect.

**Construction** All brass components. 1/8" [3mm] thick brass housing. 1/2" schedule 40 brass stem.

**Lens** Tempered soda lime glass.

**Voltage** 9-15V input. Triac dimmable with MLV dimmer. Remote transformer required.

**Stem Height** Custom stem heights are available upon request. Standard stem height is 20". Minimum height is 8".

— **20** 20" [51 cm]  
 — **24** 24" [61 cm]  
 — Custom height (in inches)

**Lamps** Triac dimmable: MLV > 6% typ., ELV > 16% typ.

Cree XPE2 LED — **2W-A** 2 Watt **AMBER** (1500K)  
 TURTLE FRIENDLY — **2W-RO** 2 Watt **RED-ORANGE** (1000K)

Cree XPG2 LED — **3W** 3 Watt Warm White (3000K)\*

\* Also available in 2700K. Add color suffix to lamp specification, e.g. "3W-2700K"

**Optical Accessory** — **GOBO-SWIRL** Swirled center pattern as shown below  
 Custom gobos available upon request

**Mounting Accessories** 1/2" male threads. Mounts into any standard j-box or:


— **GS2** Heavy-duty ground spike  
 — **GS2BC** Heavy-duty ground spike with cast brass cap  
 — **GS3R** Heavy-duty ground spike with brass cap for telescoping fixture riser  
 — **JB** Cast brass junction box

**Finish:** Unfinished is standard; no specification required. The fixture will weather to a natural patina. The patina process is natural with brass and copper. Rate of patina and eventual color is dependent upon climate and proximity to the ocean. Thus, Beachside does not guarantee any specific appearance.



**SUITABLE FOR  
INDOOR AND  
OUTDOOR USE**

IP 66  
 10 year fixture warranty  
 5 year Cree LED module warranty

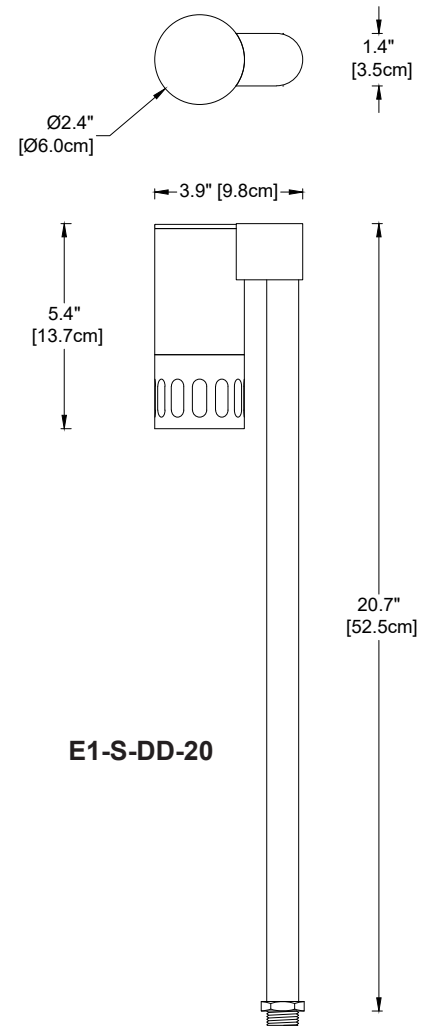

**E1-S-DD-20**

Project		By		Date	
For ordering purposes, please specify (example: <b>E1-S-DD-20-2W-A-GS2BC</b> )					
<b>E1-S-DD</b>	—	—	—	—	—
Fixture	Stem Height	Lamp	Accessory(ies)		