

E1-S

The E1-S is an unobtrusive, low-voltage, path light. More compact than a shaded path light, its minimalist design allows attention to focus on the lamp's extra-wide flood effect, not the fixture itself.

Construction All brass components. 1/8" [3mm] thick brass housing. 1/2" schedule 40 brass stem.

Lens Tempered soda lime glass.

Voltage 9-15V input. Triac dimmable with MLV dimmer. Remote transformer required.

Stem Height Custom stem heights are available upon request. Standard stem height is 20". Minimum height is 8".

- __ **20** 20" [51 cm]
- __ **24** 24" [61 cm]
- __ Custom height (in inches)

Lamps Triac dimmable: MLV > 6% typ., ELV > 16% typ.

Cree XPE2 LED	__ 2W-A	2 Watt AMBER (1500K)	16 cd	32 lm
TURTLE FRIENDLY	__ 2W-RO	2 Watt RED-ORANGE (1000K)		
Cree XPG2 LED	__ 3W	3 Watt Warm White (3000K)	49 cd	97 lm


* Also available in 2700K. Add color suffix to lamp specification, e.g. "3W-2700K"

Photometric results obtained with a 24-inch high stem.

Mounting 1/2" male threads. Mounts into any standard j-box or:

- Accessories**
- __ **GS2** Heavy-duty ground spike
 - __ **GS2BC** Heavy-duty ground spike with cast brass cap
 - __ **GS3R** Heavy-duty ground spike with brass cap for telescoping fixture riser
 - __ **JB** Cast brass junction box

Finish: Unfinished is standard; no specification required. The fixture will weather to a natural patina. The patina process is natural with brass and copper. Rate of patina and eventual color is dependent upon climate and proximity to the ocean. Thus, Beachside does not guarantee any specific appearance.

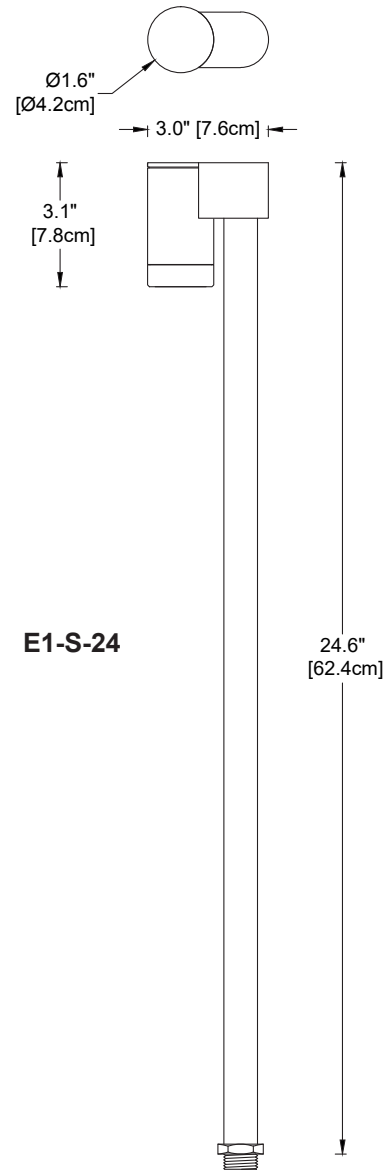

IP 66
 CSA Listed, file #190030
 10 year fixture warranty
 5 year Cree LED module warranty



SUITABLE FOR
 INDOOR AND
 OUTDOOR USE

Project _____	By _____	Date _____
For ordering purposes, please specify (example: E1-S-20-2W-A-GS2BC)		
E1-S	—	—
Fixture	Stem Height	Accessory(ies)