

E5

The louvered E5 is an unobtrusive, low-voltage, aimable path/step/dock light.

Construction All brass components. 1/8" [3mm] thick brass housing. 1/2" schedule 40 brass stem.

Lens Tempered frosted soda lime glass

Voltage 12 Volts AC/DC with integral driver (9-15V input, dimmable below 9V). Remote transformer required.

Stem Height

<input type="checkbox"/> 0	0" Male threaded fitting only—no additional height
<input type="checkbox"/> 2	2" [5 cm]
<input type="checkbox"/> 4	4" [10 cm]
<input type="checkbox"/> 8	8" [20 cm]
<input type="checkbox"/> 12	12" [30 cm]
<input type="checkbox"/> 16	16" [41 cm]
<input type="checkbox"/> 20	20" [51 cm]
<input type="checkbox"/> Custom	Custom height (in inches)

Lamps LED light engine • Triac dimmable: MLV >6% typ.


Cree XPE2 chip	<input type="checkbox"/> 2W-A-NFL	2 Watt AMBER (1700K)	12 lm
Cree XPE2 chip	<input type="checkbox"/> 2W-RO-NFL	2 Watt RED-ORANGE (1000K)	12 lm

Mounting 1/2" male threads. Mounts into any standard j-box or:

Accessories

<input type="checkbox"/> BSB	Brass Surface Box for surface-mount applications on concrete or wood. Includes internal brass collar and stainless steel lag screws. 4.25" (11cm) diameter x 2.0" (5cm) high.
<input type="checkbox"/> E5-BRACKET	Brass bracket with stainless screws to secure to side of wood or concrete deck
<input type="checkbox"/> GS2	Heavy-duty ground spike
<input type="checkbox"/> GS2BC	Heavy-duty ground spike with cast brass cap
<input type="checkbox"/> GS3R	Heavy-duty ground spike with brass cap for telescoping fixture riser. Stem required. Select from above "Stem Height" choices.
<input type="checkbox"/> GS4	Standard ground spike with cast brass cap
<input type="checkbox"/> JB	Cast brass junction box

Finish: Unfinished is standard; no specification required. The fixture will weather to a natural patina. The patina process is natural with brass and copper. Rate of patina and eventual color is dependent upon climate and proximity to the ocean. Thus, Beachside does not guarantee any specific appearance.

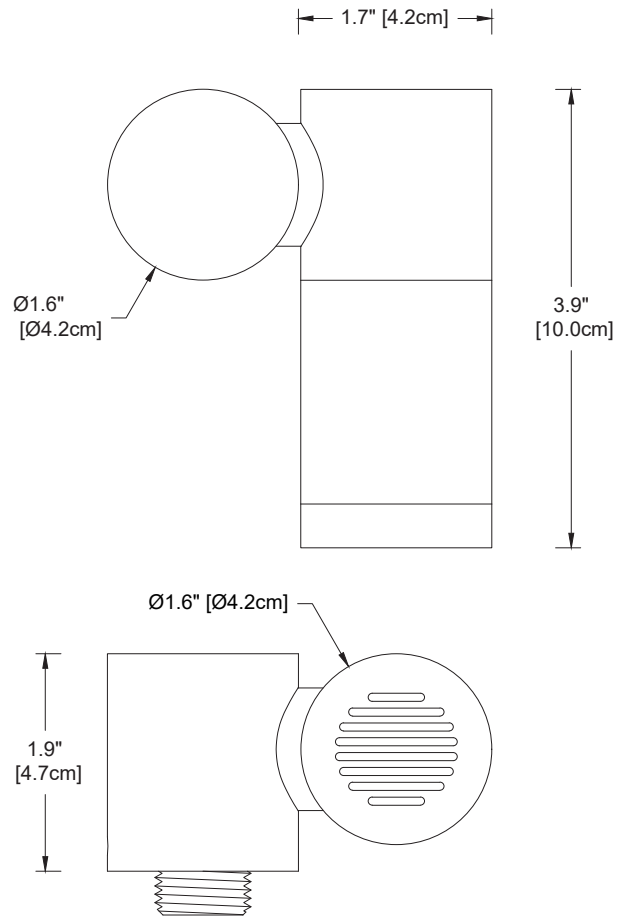

E5 with 0" stem

IP 66
CSA listing pending
10 year fixture warranty
5 year Cree LED module warranty

This pathlight is certified by DarkSky International when mounted on a HORIZONTAL surface and aimed parallel to the ground. This fixture will not be DarkSky compliant if mounted to a vertical surface such as a wall or fence.



Certified by DarkSky.org
when using long wavelength
Amber & Red Orange LED



Certified by DarkSky.org

Project	By	Date
For ordering purposes, please specify (example: E5—0—2W-A-NFL—BSB)		
E5	—	—
Fixture	Stem Height	Accessory(ies)