

E8-H-2x4.5 / E8-H-2x9

SUITABLE FOR
INDOOR AND
OUTDOOR USE

The E8-H-2x4.5 and -2x9 are low-voltage, hanging fixtures producing both decorative effect and downlight.

Construction All brass components. 1/8" [3mm] thick brass housings.

Lens Tempered soda lime glass

Mounting Supplied with 20" stainless steel cable, 36" lead wire, and 1/2" male fitting for mounting accessory. Or the cable can be removed and the fixture hung directly by its loop.

Voltage 12 Volts, remote transformer required.


Lamps

- BA15D double-contact bayonet socket
- ___ **2W-DC-27** 2 Watt LED (2700K)
- ___ **2W-DC-30** 2 Watt LED (3000K)

Mounting Accessories

- ___ **CMK** Catenary cable mounting kit
- ___ **TDM1** Brass tree/deck mount with stainless steel screws
- ___ **TDM2-__** Brass tree mount with nylon strap (48, 72, or 96")
- ___ **TDM2SS-__** Brass tree mount with stainless steel strap (48, 72, or 96")
- ___ **TDM3-HANG** Brass low-profile deck/wall mount—for hanging fixtures
- ___ **TDM4-HANG** Brass low-profile tree mount with notch for wire—for hanging fixtures
- ___ **TMJB-__** Brass tree-mounted junction box, single fixture mount, stainless steel strap (48, 72, or 96")
- ___ **TMJBX** Brass tree-mounted junction box, single fixture mount, stainless steel screws

Finish: Unfinished is standard; no specification required. The fixture will weather to a natural patina. The patina process is natural with brass and copper. Rate of patina and eventual color is dependent upon climate and proximity to the ocean. Thus, Beachside does not guarantee any specific appearance.

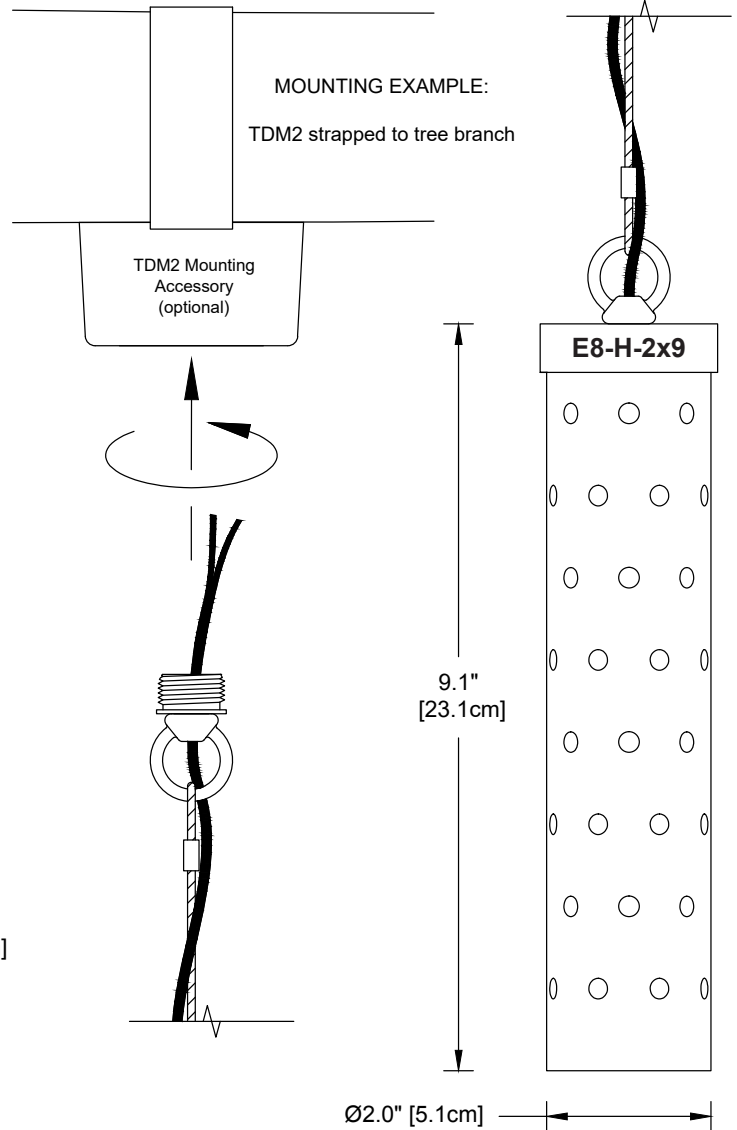

Weight: 0.8 lbs [0.4 kg] E8-H-2x4.5
1.4 lbs [0.6 kg] E8-H-2x9
(excludes Mounting Accessories)

IP 24
CSA Listed, file #190030
10 year fixture warranty

Project	By	Date
For ordering purposes, please specify (example: E8-H-2x9—2W-DC-30—TDM2-72)		
E8-H-2x _____	_____	_____
Fixture	Lamp	Accessory(ies)