

E9-RCL

The E9-RCL is a rectangular, brass, recessed fixture with a louvered faceplate for mounting in floors, walls, or ceilings.

E9-RCL: Surface-mounted trim. 2.5"-diameter mounting hole required.

E9-RCL-CR: Adds CONCRETE RING and PVC HOUSING for flush-mounted, recessed trim.

Construction Solid brass faceplate, trim ring, and lamp compartment. Outer PVC Housing for "CR" versions features four 1/2" NPT taps for conduit: two in the side and two in the back/bottom. Secured with two #6-32 black stainless steel screws.

Lens Tempered frosted soda lime glass

Voltage 12 Volts AC / DC. Remote transformer required.

Lamps Integrated LED light engine
Triac dimmable: MLV >6% typ, ELV >16% typ

Cree XPE2 LED 2 Watt AMBER (1500K) TURTLE FRIENDLY	___ 2W-A-SP ___ 2W-A-NFL ___ 2W-A-FL ___ 2W-A-NO	spot narrow flood flood no optic (wide flood)
Cree XPE2 LED 2 Watt RED-ORANGE (1000K) TURTLE FRIENDLY	___ 2W-RO-SP ___ 2W-RO-NFL ___ 2W-RO-FL ___ 2W-RO-NO	spot narrow flood flood no optic (wide flood)
Cree XPG2 LED 3 Watt Warm White (3000K)*	___ 3W-SP ___ 3W-NFL ___ 3W-FL ___ 3W-NO	spot narrow flood flood no optic (wide flood)

* Also available in 2700K. Add color suffix to lamp specification, e.g. "3W-NFL-2700K"

MR16 LED • GU5.3 • Amber, Warm White (2700K/3000K)				
5 Watt Cree chipset TURTLE FRIENDLY	___ 5W-A-NFL <u>2700K</u>	AMBER (1300K) <u>3000K</u>	25° narrow flood	23 lm
Cree chipset 5 Watts	___ 5W-SP-27 ___ 5W-NFL-27 ___ 5W-FL-27 ___ 5W-FL/60-27 ___ 5W-WFL-27	___ 5W-SP-30 ___ 5W-NFL-30 ___ 5W-FL-30 ___ 5W-FL/60-30 ___ 5W-WFL-30	15° spot 25° narrow flood 40° flood 60° flood 100° wide flood	85+ CRI 85+ CRI 85+ CRI 85+ CRI 85+ CRI
Lumiled chipset 7 Watts	___ 7W-FL/60-27 ___ 7W-FL/60-30	___ 7W-FL/60-30	60° flood	90+ CRI
Soraa chipset 8 Watts	___ 8W-SP-27 ___ 8W-NFL-27 ___ 8W-FL-27	___ 8W-SP-30 ___ 8W-NFL-30 ___ 8W-FL-30	10° spot 25° narrow flood 36° flood	90 CRI 90 CRI 90 CRI

Optical Accessories**
___ **HL1** Honeycomb louver, 1/8" [3mm] thick
___ **PR** Prismatic spread lens
___ **RT** Rectilinear spread lens

**Maximum (2) accessories. HL2 cannot be used with any other accessory.



Finish: Unfinished is standard; no specification required. The fixture will weather to a natural patina. The patina process is natural with brass and copper. Rate of patina and eventual color is dependent upon climate and proximity to the ocean. Thus, Beachside does not guarantee any specific appearance.

Weight: 4.4 lbs [2.0 kg]

IP 67
CSA Listed, file #190030
10 year fixture warranty
3 year warranty on MR16 LED lamps
Drive-over static load rating: 10,500 lbs (CR version only)



PVC Housing and Concrete Ring shown on E9-R-CR

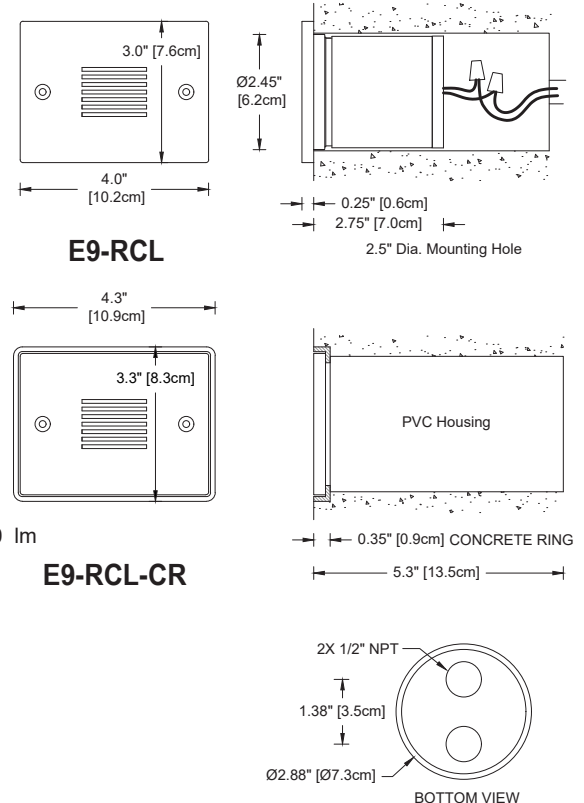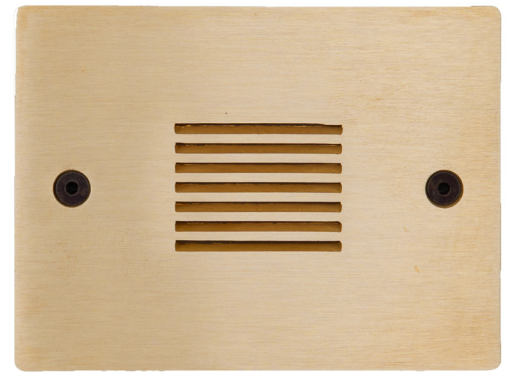

Project	By	Date
For ordering purposes, please specify (example: E9-RCL-CR—5W-NFL-27—RT)		
E9-RCL-		
Fixture	Lamp	Accessory(ies)