

E9-SQL

The E9-SQL is a square, brass, recessed fixture with a louvered faceplate for mounting in floors, walls, or ceilings.

E9-SQL: Surface-mounted trim. 2.5"-diameter mounting hole required.

E9-SQL-CR: Adds CONCRETE RING and PVC HOUSING for flush-mounted, recessed trim.

Construction Solid brass faceplate, trim ring, and lamp compartment. Outer PVC Housing for "CR" versions features four 1/2" NPT taps for conduit: two in the side and two in the back/bottom. Secured with two #6-32 black stainless steel screws.

Lens Tempered frosted soda lime glass

Voltage 12 Volts AC / DC. Remote transformer required.

Lamps Integrated LED light engine
Triac dimmable: MLV >6% typ, ELV >16% typ

Cree XPE2 LED	___ 2W-A-SP	spot
2 Watt	___ 2W-A-NFL	narrow flood
AMBER (1500K)	___ 2W-A-FL	flood
TURTLE FRIENDLY	___ 2W-A-NO	no optic (wide flood)
Cree XPE2 LED	___ 2W-RO-SP	spot
2 Watt	___ 2W-RO-NFL	narrow flood
RED-ORANGE (1000K)	___ 2W-RO-FL	flood
TURTLE FRIENDLY	___ 2W-RO-NO	no optic (wide flood)
Cree XPG2 LED	___ 3W-SP	spot
3 Watt	___ 3W-NFL	narrow flood
Warm White (3000K)*	___ 3W-FL	flood
	___ 3W-NO	no optic (wide flood)

* Also available in 2700K. Add color suffix to lamp specification, e.g. "3W-NFL-2700K"

MR16 LED • GU5.3 • Amber, Warm White (2700K/3000K)

5 Watt Cree chipset	___ 5W-A-NFL	AMBER (1300K)	25° narrow flood	
TURTLE FRIENDLY		<u>2700K</u>		
	___ 5W-SP-27	___ 5W-SP-30	15° spot	85+ CRI
Cree chipset	___ 5W-NFL-27	___ 5W-NFL-30	25° narrow flood	85+ CRI
5 Watts	___ 5W-FL-27	___ 5W-FL-30	40° flood	85+ CRI
	___ 5W-FL/60-27	___ 5W-FL/60-30	60° flood	85+ CRI
	___ 5W-WFL-27	___ 5W-WFL-30	100° wide flood	85+ CRI
Lumiled chipset	___ 7W-FL/60-27	___ 7W-FL/60-30	60° flood	90+ CRI
7 Watts				
Soraa chipset	___ 8W-SP-27	___ 8W-SP-30	10° spot	90 CRI
8 Watts	___ 8W-NFL-27	___ 8W-NFL-30	25° narrow flood	90 CRI
	___ 8W-FL-27	___ 8W-FL-30	36° flood	90 CRI

Optical Accessories**

___ HL1	Honeycomb louver, 1/8" [3mm] thick
___ PR	Prismatic spread lens
___ RT	Rectilinear spread lens

**Maximum (2) accessories. HL2 cannot be used with any other accessory.

Finish: Unfinished is standard; no specification required. The fixture will weather to a natural patina. The patina process is natural with brass and copper. Rate of patina and eventual color is dependent upon climate and proximity to the ocean. Thus, Beachside does not guarantee any specific appearance.





Weight: 4.4 lbs [2.0 kg]

IP 67
CSA Listed, file #190030
10 year fixture warranty
3 year warranty on MR16 LED lamps
Drive-over static load rating: 10,500 lbs (CR version only)




PVC Housing and Concrete Ring shown on E9-R-CR

E9-SQL

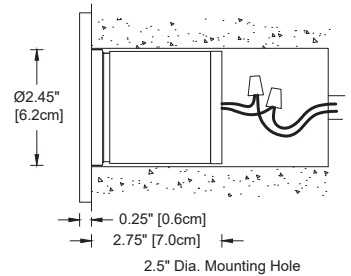

E9-SQL-CR



BOTTOM VIEW

Project _____	By _____	Date _____
For ordering purposes, please specify (example: E9-SQL-CR—5W-NFL-27—RT)		
E9-SQL-	_____	_____
Fixture	Lamp	Accessory(ies)