

L-011-CM

The L-011-CM is a fixed, ceiling-mounted downlight.

Construction All brass components. 0.140" [3.6mm] thick brass housing.

Lens Tempered soda lime glass.

Mounting *Round Canopy* (standard): Brass canopy mounts onto brass crossbar (included). Crossbar fits over 3.0" and 4.0" octagonal / round and single gang rectangular boxes.
Square Canopy (optional): Square brass canopy with same crossbar mounting as standard Round Canopy.
Small Square Canopy (optional): Two-part brass canopy mounts over 3.0-3.5" octagonal / round box only.
No Canopy (optional): Canopy not included. 1/2" NPSM brass threaded fitting only)

L-011-CM 12 Volts • LED light engine • Remote transformer required
 Triac dimmable: MLV >1% typ., ELV >5% typ.

7 Watts Cree XPE2 AMBER (1500K) 590-600 nm TURTLE FRIENDLY	___ 7W-A-SP ___ 7W-A-NFL ___ 7W-A-FL	13° Beam, 28° Field 30° Beam, 50° Field 50° Beam, 77° Field	2250 cd 519 cd 160 cd	149 lm 138 lm 113 lm	30 lm/W 23 lm/W 19 lm/W
---	---	---	-----------------------------	----------------------------	-------------------------------

8 Watts Cree XPE2 RED-ORANGE (1000K) 625-635 nm TURTLE FRIENDLY	___ 8W-RO-SP ___ 8W-RO-NFL ___ 8W-RO-FL	9° Beam, 20° Field 30° Beam, 45° Field 54° Beam, 81° Field	8854 cd 1237 cd 347 cd	338 lm 329 lm 291 lm	55 lm/W 53 lm/W 46 lm/W
--	--	--	------------------------------	----------------------------	-------------------------------

11 Watts Cree XPG2 Warm White	2700K ___ 11W-827-SP 3000K ___ 11W-830-SP ___ 11W-830-NFL ___ 11W-830-FL	___ 11W-827-NFL 12° Beam, 29° Field 29° Beam, 50° Field 48° Beam, 79° Field	___ 11W-827-FL 10241 cd 2754 cd 908 cd	791 lm 765 lm 625 lm	76 lm/W 73 lm/W 60 lm/W	CRI 81
-------------------------------------	---	---	--	----------------------------	-------------------------------	--------

11 Watts Cree XPG3 Warm White High CRI	2700K ___ 11W-927-SP 3000K ___ 11W-930-SP ___ 11W-930-NFL ___ 11W-930-FL	___ 11W-927-NFL 12° Beam, 29° Field 29° Beam, 50° Field 48° Beam, 79° Field	___ 11W-927-FL 7321 cd 2382 cd 902 cd	748 lm 717 lm 592 lm	78 lm/W 75 lm/W 62 lm/W	CRI 92
---	---	---	---	----------------------------	-------------------------------	--------

GU5.3 MR16 LED • Remote Transformer Required
 Amber (1500K), Warm White (2700K/3000K) • Most lamps dim to less than 20%.
 See lamp manufacturer's transformer/dimmer compatibility chart.

5 Watt Cree chipset TURTLE FRIENDLY	___ 5W-A-NFL	AMBER (1500K)	25° narrow flood	83 lm	
		<u>2700K</u>	<u>3000K</u>		
	___ 5W-SP-27 ___ 5W-NFL-27 ___ 5W-FL-27 ___ 5W-FL/60-27 ___ 5W-WFL-27	___ 5W-SP-30 ___ 5W-NFL-30 ___ 5W-FL-30 ___ 5W-FL/60-30 ___ 5W-WFL-30	15° spot 25° narrow flood 40° flood 60° flood 100° wide flood	320 lm 320 lm 320 lm 320 lm 320 lm	85+ CRI 85+ CRI 85+ CRI 85+ CRI 85+ CRI
Lumiled chipset 7 Watts	___ 7W-FL/60-27	___ 7W-FL/60-30	60° flood	483 lm	90+ CRI
Soraa chipset 8 Watts	___ 8W-SP-27 ___ 8W-NFL-27 ___ 8W-FL-27	___ 8W-SP-30 ___ 8W-NFL-30 ___ 8W-FL-30	10° spot 25° narrow flood 36° flood	600 lm 630 lm 630 lm	90 CRI 90 CRI 90 CRI



L-011-CM



L-011-CM-NC



IP 66
 CSA Listed, file #190030
 10 year fixture warranty
 5 year MR16 LED lamp warranty
 3 year LED module warranty

L-011-CM

L-011-CM-120V 120 Volts GU10 MR16 LED • Amber (1500K), Warm White (2700K/3000K)
L-011-CM-230V 230 Volts Most lamps dim to less than 20%. See lamp manufacturer's transformer/dimmer compatibility chart.

5 Watt Cree chipset <i>TURTLE FRIENDLY</i>	5W-A-NFL-120V	AMBER (1500K)	25° narrow flood	79 lm	
		<i>2700K</i>			
		<i>3000K</i>			
Green Creative 5 Watts	5W-NFL-27-120V	5W-NFL-30-120V	25° narrow flood	390 lm	95 CRI
	5W-FL-27-120V	5W-FL-30-120V	35° flood	390 lm	95 CRI
	8W-SP-27-120V	8W-SP-30-120V	10° spot	600 lm	90 CRI
Soraa chipset 8 Watts	8W-NFL-27-120V	8W-NFL-30-120V	25° narrow flood	630 lm	90 CRI
	8W-FL-27-120V	8W-FL-30-120V	36° flood	630 lm	90 CRI
	8W-WFL-27-120V	8W-WFL-30-120V	60° wide flood	630 lm	90 CRI

Mounting Accessories


- NC** No Canopy (1/2" NPSM brass threaded fitting only)
- SQ1** 4.75" (12.1cm) Square canopy substitution.
- SQ1-3.5** 3.5" (8.9cm) Small square canopy substitution. For 3.0-3.5" round or octagonal recessed box with screw spacing at 2.75" on center.

Optical Accessories

- BGS** Brass glare shield, 45° cutoff
- FR** Frosted lens
- HL1** Honeycomb louver, 1/8" [3mm] thick
- HL2** Honeycomb louver, 1/4" [6mm] thick
- KP** Extended snoot
- PR** Prismatic spread lens
- RT** Rectilinear spread lens
- SL** Solite lens

Finish: Unfinished is standard, no specification required. The fixture will weather to a natural patina, a normal process with brass and copper. Rate of patina and final color depends upon climate and ocean proximity. Thus, Beachside does not guarantee any specific appearance.

Weight: 3.1 lbs. [1.4 kg]

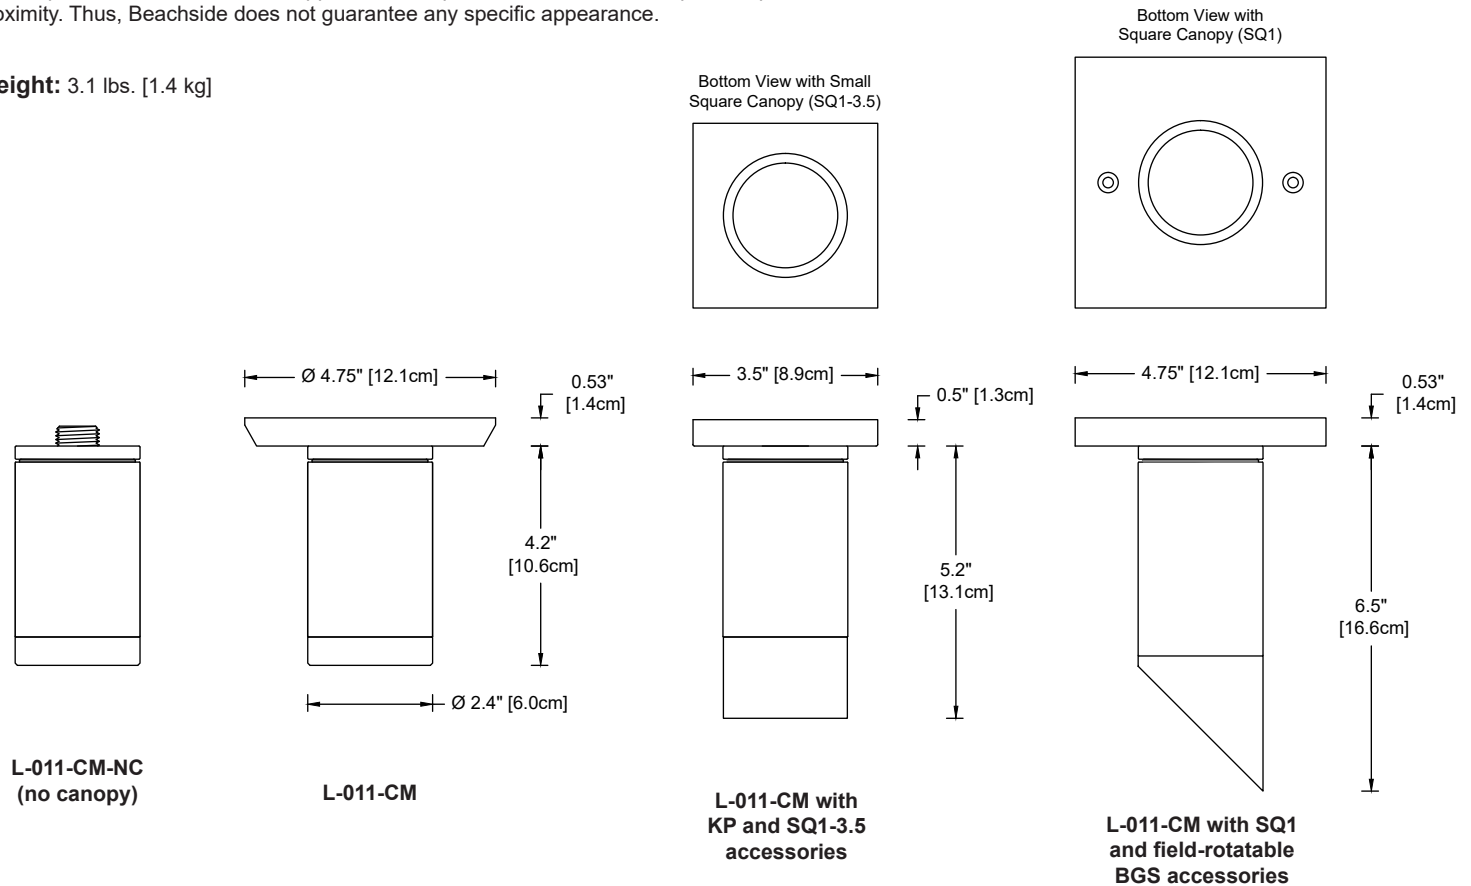

Project _____	By _____	Date _____
For ordering purposes, please specify (example: L-011-CM-120V—8W-FL-27-120V—SQ1-3.5—BGS)		
L-011-CM-	—	—
Fixture / Voltage	Lamp	Accessory(ies)