

# L-011-KP

The L-011-KP is a directional fixture that features an extended snoot — for **downlighting** applications only. (For uplighting applications, use standard L-011 with BGSF full-cutoff glare shield, which has a weep hole.)

**Construction** All brass components, 0.140" [3.6mm] thick brass housing

**Lens** Tempered soda lime glass

**L-011-KP** 12 Volts AC/DC • GU5.3 MR16 LED • Remote Transformer Required  
Amber (1500K), Warm White (2700K/3000K) • Most lamps dim to less than 20%. See lamp manufacturer's transformer/dimmer compatibility chart.

5 Watt Cree chipset	— <b>5W-A-NFL</b>	<b>AMBER (1500K)</b>	25° narrow flood	83 lm	
	<u>2700K</u>	<u>3000K</u>			
	— <b>5W-SP-27</b>	— <b>5W-SP-30</b>	15° spot	320 lm	85+ CRI
	— <b>5W-NFL-27</b>	— <b>5W-NFL-30</b>	25° narrow flood	320 lm	85+ CRI
Cree chipset 5 Watts	— <b>5W-FL-27</b>	— <b>5W-FL-30</b>	40° flood	320 lm	85+ CRI
	— <b>5W-FL/60-27</b>	— <b>5W-FL/60-30</b>	60° flood	320 lm	85+ CRI
	— <b>5W-WFL-27</b>	— <b>5W-WFL-30</b>	100° wide flood	320 lm	85+ CRI
Lumiled chipset 7 Watts	— <b>7W-FL/60-27</b>	— <b>7W-FL/60-30</b>	60° flood	483 lm	90+ CRI
	— <b>8W-SP-27</b>	— <b>8W-SP-30</b>	10° spot	600 lm	90 CRI
Soraa chipset 8 Watts	— <b>8W-NFL-27</b>	— <b>8W-NFL-30</b>	25° narrow flood	630 lm	90 CRI
	— <b>8W-FL-27</b>	— <b>8W-FL-30</b>	36° flood	630 lm	90 CRI

**L-011-KP-120V** 120 Volts GU10 MR16 LED • Amber (1500K), Warm White (2700K/3000K)

**L-011-KP-230V** 230 Volts Most lamps dim to less than 20%. See lamp manufacturer's transformer/dimmer compatibility chart.

5 Watt Cree chipset	— <b>5W-A-NFL-120V</b>	<b>AMBER (1500K)</b>	25° narrow flood	79 lm	
	<u>2700K</u>	<u>3000K</u>			
	— <b>5W-NFL-27-120V</b>	— <b>5W-NFL-30-120V</b>	25° narrow flood	390 lm	95 CRI
	— <b>5W-FL-27-120V</b>	— <b>5W-FL-30-120V</b>	35° flood	390 lm	95 CRI
Green Creative 5 Watts	— <b>8W-SP-27-120V</b>	— <b>8W-SP-30-120V</b>	10° spot	600 lm	90 CRI
	— <b>8W-NFL-27-120V</b>	— <b>8W-NFL-30-120V</b>	25° narrow flood	630 lm	90 CRI
	— <b>8W-FL-27-120V</b>	— <b>8W-FL-30-120V</b>	36° flood	630 lm	90 CRI
Soraa chipset 8 Watts	— <b>8W-WFL-27-120V</b>	— <b>8W-WFL-30-120V</b>	60° wide flood	630 lm	90 CRI


**Optical Accessories**

— <b>FR</b>	Frosted lens	— <b>RT</b>	Rectilinear lens
— <b>HL1</b>	Honeycomb louver, 1/8" [3mm] thick	— <b>SL</b>	Solite lens
— <b>PR</b>	Prismatic spread lens		


**Mounting Accessories**

— <b>CM-M1</b>	4.75" dia. brass canopy, single-hole
— <b>CM-M2</b>	4.75" dia. brass canopy, double-hole ( <i>Two fixture heads per canopy</i> )
— <b>CMF1</b>	3-1/4" x 3/8" brass canopy ( <i>SA accessory recommended</i> )
— <b>SA</b>	Sure Aim locking rotation accessory
— <b>SQ1</b>	4.75" (12.1cm) Square brass canopy
— <b>SQ2</b>	4.75" (12.1cm) Square brass canopy, double-hole
— <b>SQ1-3.5</b>	3.5" (9cm) Small square brass canopy. Mounts over 3.0-3.5" octagonal / round junction box only.
— <b>TDM1</b>	*Brass tree/deck mount with stainless steel screws
— <b>TDM2</b>	*Brass tree mount with nylon strap ( <b>48, 72, or 96"</b> )
— <b>TDM2SS</b>	*Brass tree mount with stainless steel strap ( <b>48, 72, or 96"</b> )
— <b>TDM3</b>	*Brass low-profile deck/wall mount ( <i>SA accessory recommended</i> )
— <b>TDM4</b>	*Brass low-profile tree mount with notch for wire ( <i>SA accessory recommended</i> )
— <b>TMJB</b>	Brass tree-mount box, single fixture, stnls stl strap ( <b>48, 72, or 96"</b> )
— <b>TMJB2</b>	Brass tree-mount box, double fixture, stnls stl strap ( <b>48, 72, or 96"</b> )
— <b>TMJBX</b>	Brass tree-mounted j-box for single fixture, stainless steel screws
— <b>TMJB2X</b>	Brass tree-mounted j-box for double fixture, stainless steel screws
— <b>VTM</b>	Brass rectangular junction box, direct mount or as part of <b>VTM-PALM</b>
— <b>VTM-PALM</b>	Set of up to four <b>VTM</b> junction boxes, stainless steel strap ( <b>70 or 88"</b> ), and wiring. See spec. sheet for details.

\* 12 Volt only

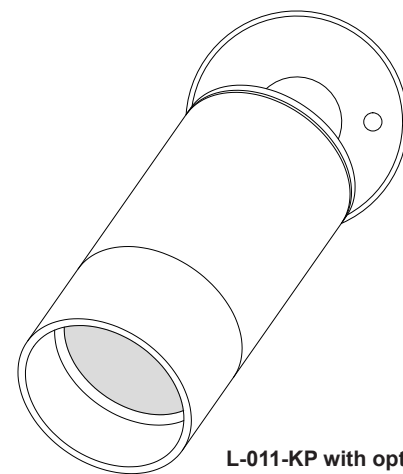

**L-011-KP with optional TDM3 and SA accessories**

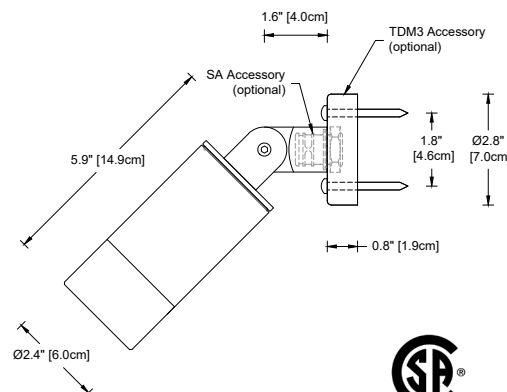

**C US**  
**SUITABLE FOR**  
**INDOOR USE**

**Weight: 2.3 lbs / 1 kg**

**Finish:** Unfinished is standard; no specification required. The fixture will weather to a natural patina. The patina process is natural with brass and copper. Rate of patina and eventual color is dependent upon climate and proximity to the ocean. Thus, Beachside does not guarantee any specific appearance.

IP 66  
CSA Listed, file #190030  
10 year fixture warranty  
3 year warranty for MR16 lamps

Project	By	Date
For ordering purposes, please specify (example: <b>L-011-KP-120V—8W-SP-27-120V—HL1—SA—TMJBX</b> )		
<b>L-011-KP-</b>		
Fixture	Lamp	Accessory