

L-011

The L-011 is an unobtrusive, directional fixture available in both low voltage and line voltage configurations. Its compact design brings attention to the lamp's effect, not to the fixture itself. The L-011 can be equipped with several different MR16 LED and halogen lamps and a variety of accessories to produce the desired effect.

Construction All brass components • 0.140" [3.6mm] thick brass housing

Lens Tempered glass, stepped to prevent pooling of water on lens

L-011 12 Volts AC/DC • GU5.3 MR16 LED • Remote Transformer Required
Amber (1500K), Warm White (2700K/3000K) • Most lamps dim to less than 20%.
See lamp manufacturer's transformer/dimmer compatibility chart.

5 Watt Cree chipset	— 5W-A-NFL	AMBER (1500K)	25° narrow flood	83 lm	
	— <u>2700K</u>	— <u>3000K</u>			
Cree chipset 5 Watts	— 5W-SP-27	— 5W-SP-30	15° spot	320 lm	85+ CRI
	— 5W-NFL-27	— 5W-NFL-30	25° narrow flood	320 lm	85+ CRI
	— 5W-FL-27	— 5W-FL-30	40° flood	320 lm	85+ CRI
	— 5W-FL/60-27	— 5W-FL/60-30	60° flood	320 lm	85+ CRI
Lumiled chipset 7 Watts	— 5W-WFL-27	— 5W-WFL-30	100° wide flood	320 lm	85+ CRI
	— 7W-FL/60-27	— 7W-FL/60-30	60° flood	483 lm	90+ CRI
Sora chipset 8 Watts	— 8W-SP-27	— 8W-SP-30	10° spot	600 lm	90 CRI
	— 8W-NFL-27	— 8W-NFL-30	25° narrow flood	630 lm	90 CRI
	— 8W-FL-27	— 8W-FL-30	36° flood	630 lm	90 CRI


L-011-120V 120 Volts GU10 MR16 LED • Amber (1500K), Warm White (2700K/3000K)
L-011-230V 230 Volts Most lamps dim to less than 20%. See lamp manufacturer's transformer/dimmer compatibility chart.

5 Watt Cree chipset	— 5W-A-NFL-120V	AMBER (1500K)	25° narrow flood	79 lm	
	— <u>2700K</u>	— <u>3000K</u>			
Green Creative 5 Watts	— 5W-NFL-27-120V	— 5W-NFL-30-120V	25° narrow flood	390 lm	95 CRI
	— 5W-FL-27-120V	— 5W-FL-30-120V	35° flood	390 lm	95 CRI
Sora chipset 8 Watts	— 8W-SP-27-120V	— 8W-SP-30-120V	10° spot	600 lm	90 CRI
	— 8W-NFL-27-120V	— 8W-NFL-30-120V	25° narrow flood	630 lm	90 CRI
	— 8W-FL-27-120V	— 8W-FL-30-120V	36° flood	630 lm	90 CRI
	— 8W-WFL-27-120V	— 8W-WFL-30-120V	60° wide flood	630 lm	90 CRI

Optical Accessories

- **BGS** Brass glare shield, 45° cutoff
- **BGSF** Brass glare shield, full cutoff with weep hole
- **CTO-1/4-2.04** Color Temperature Orange filter 1/4
- **CTO-1/2-2.04** Color Temperature Orange filter 1/2
- **CTO-3/4-2.04** Color Temperature Orange filter 3/4
- **FR** Frosted lens, 1/8" [3mm] thick
- **HL1** Honeycomb louver, 1/8" [3mm] thick
- **HL2** Honeycomb louver, 1/4" [6mm] thick
- **PR** Prismatic spread lens, 1/8" [3mm] thick
- **RT** Rectilinear spread lens, 1/8" [3mm] thick
- **SL** Solite (Soft Focus) lens, 1/8" [3mm] thick

Maximum (2) 1/8" thick accessories or (1) HL2 + (1) CTO Filter

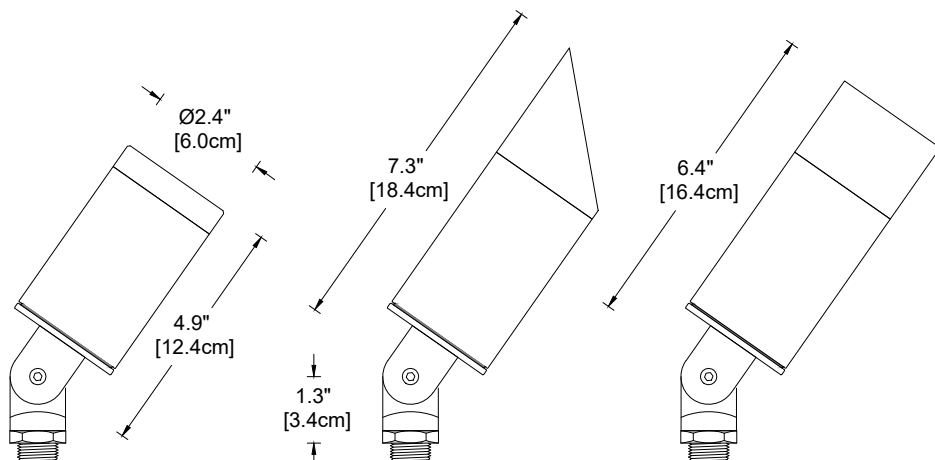

L-011



L-011 with BGS Accessory



L-011 with BGSF Accessory



SUITABLE FOR INDOOR
USE UP TO 15W LED


L-011

Mounting Accessories

1/2" male threads mount into any standard j-box or:

- ___ **BSB** Brass surface-mounted box for concrete or wood
- ___ **GS2** Heavy-duty ground spike
- ___ **GS2BC** Heavy-duty ground spike with cast brass cap
- ___ **GS3R** Heavy-duty ground spike with brass cap for telescoping fixture riser
- ___ **GS4** *Standard ground spike with cast brass cap
- ___ **JB** Cast brass round junction box
- ___ **SA** Sure Aim locking rotation accessory (not available with **STEM-S**)
- ___ **STEM-C-__** Brass riser for applications where fixture is directed UPWARD (4"/10cm, 8"/20cm, 12"/30cm, 16"/40cm, 20"/51cm or custom height—specify in inches)
- ___ **STEM-S-__** Brass riser for applications where fixture is directed DOWNWARD, such as lighting for steps (8"/20cm, 12"/30cm, 16"/40cm, 20"/51cm or custom height—specify in inches).
- ___ **TDM1** *Brass tree/deck mount with stainless steel screws
- ___ **TDM2-__** *Brass tree mount with nylon strap (48, 72, or 96")
- ___ **TDM2SS-__** *Brass tree mount with stainless steel strap (48, 72, or 96")
- ___ **TDM3** *Brass low-profile deck/wall mount (*SA accessory recommended*)
- ___ **TDM4** *Brass low-profile tree mount with notch for wire (*SA accessory recommended*)
- ___ **TMJB-__** Brass tree-mounted junction box, single fixture mount, stainless steel strap (48, 72, or 96")
- ___ **TMJB2-__** Brass tree-mounted junction box, double fixture mount, stainless steel strap (48, 72, or 96")
- ___ **TMJBX** Brass tree-mounted junction box, single fixture mount, stainless steel screws
- ___ **TMJB2X** Brass tree-mounted junction box, double fixture mount, stainless steel screws
- ___ **VTM** Brass rectangular junction box, direct mount or as part of **VTM-PALM**
- ___ **VTM-PALM** Set of up to four **VTM** junction boxes, stainless steel strap (70 or 88"), and wiring. See spec. sheet for details.

* 12 Volt only

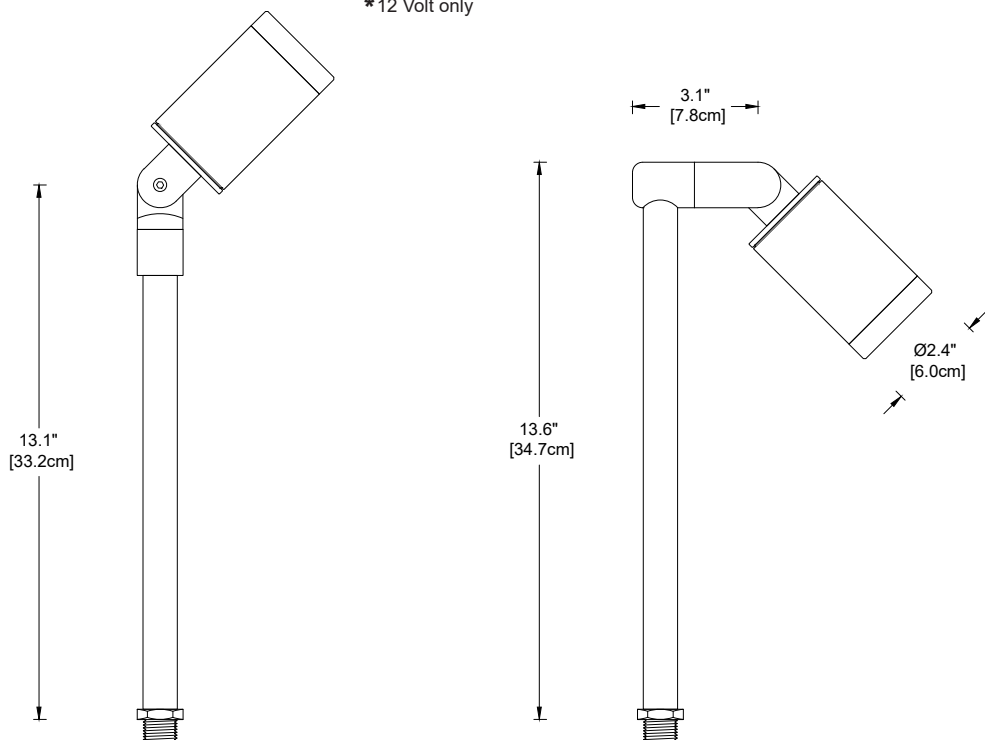

Fixtures shown on 12-inch stems



L-011-STEM-C-12



L-011-STEM-S-12

Finish: Unfinished is standard; no specification required. The fixture will weather to a natural patina. The patina process is natural with brass and copper. Rate of patina and eventual color is dependent upon climate and proximity to the ocean. Thus, Beachside does not guarantee any specific appearance.

Weight: 2.6 lbs. [1.2 kg]
(excludes Mounting Accessories)

IP 66
CSA Listed, file #190030
10 year fixture warranty
3 year warranty on MR16 LED lamps

Project	By	Date
For ordering purposes, please specify (example: L-011-120V—8W-NFL-27-120V—BGS—CTO-1/2-2.04—HL1—GS2—STEM-C-12)		
L-011-		
Fixture	Lamp	Accessory
	Accessory	Accessory
	Accessory	Accessory
	Accessory	Accessory