

M30

The M30 is a rugged, cast brass, directional fixture available in both low voltage and line voltage configurations.

Construction Cast brass components.

Lens Clear, tempered, convex glass with "C"-shaped gasket around the outer flange.

Voltage / Lamp Options


M30				
12 Volts • Remote transformer required				
GU5.3 MR16 LED • Warm White (3000K)				
Cree chipset	— 5W-SP	5 Watt	15° spot	320 lm
	— 5W-NFL	5 Watt	25° narrow flood	320 lm
	— 5W-FL	5 Watt	40° flood	320 lm
	— 5W-FL/60	5 Watt	60° flood	320 lm
	— 5W-WFL	5 Watt	100° wide flood	320 lm
Lumiled chipset	— 7W-NFL	7 Watt	25° narrow flood	483 lm
	— 7W-FL	7 Watt	40° flood	487 lm
	— 7W-WFL	7 Watt	60° wide flood	483 lm
Sora chipset	— 8W-SP	8 Watt	10° spot	500 lm
	— 8W-NFL	8 Watt	25° narrow flood	525 lm
	— 8W-FL	8 Watt	36° flood	525 lm

M30-120V				
120 Volts • E26 medium screw base				
PAR30L LED Warm White (3000K)	— 14PAR30SP	14 Watt	9° spot	
	— 14PAR30NFL	14 Watt	25° narrow flood	
	— 14PAR30FL	14 Watt	36° flood	
	— 14PAR30WFL	14 Watt	60° wide flood	

Mounting 1/2" male threads. Mounts into any standard j-box or:

Accessories		
— GS2	Heavy-duty ground spike	
— GS2BC	Heavy-duty ground spike with cast brass cap	
— JB	Cast brass junction box	
— TMJB-__	Brass tree-mounted junction box, single fixture mount, stainless steel strap (48 , 72 , or 96")	
— TMJBX	Brass tree-mounted junction box, single fixture mount, stainless steel screws	

Finish: Unfinished is standard; no specification required. The fixture will weather to a natural patina. The patina process is natural with brass and copper. Rate of patina and eventual color is dependent upon climate and proximity to the ocean. Thus, Beachside does not guarantee any specific appearance.

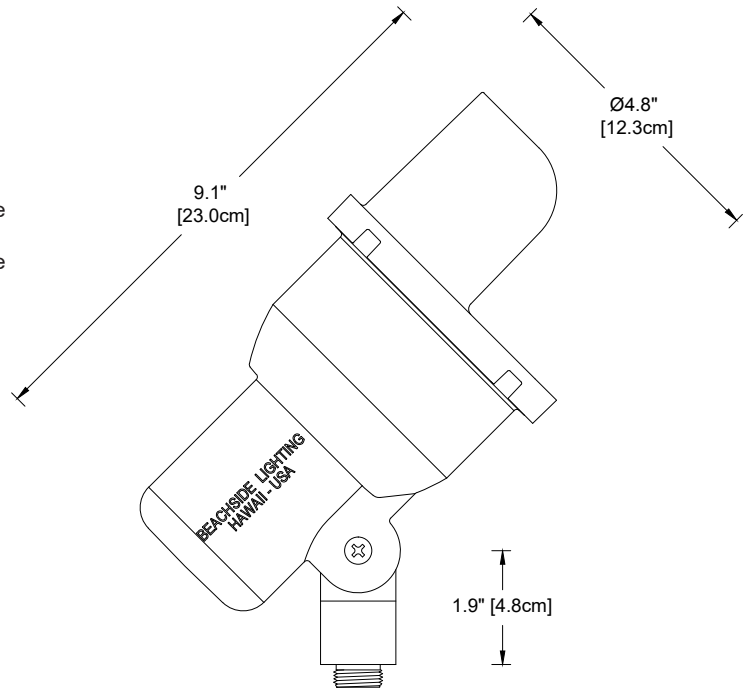

Weight: 5.4 lbs / 2.4 kg

IP66
10 year fixture warranty
3 year warranty on MR16 LED lamps



Project		By		Date	
For ordering purposes, please specify (example: M30-120V—14PAR30SP—TMJB-72)					
M30-	—	—	—	—	—
Fixture		Lamp		Accessory(ies)	