The M38 is a rugged, cast brass, directional fixture for higherwattage LED lamping capability.

Construction Cast brass components.

Lens Clear, tempered, convex glass with "C"-shaped gasket around

the outer flange.

120 Volts AC Voltage

PAR38 LED

E26 medium screw base • Par 38 Lamps

14 Watt 14PAR38SP 9° spot \_ 14PAR38NFL 14 Watt 25° narrow flood \_\_ 14PAR38FL 14 Watt 36° flood Warm White (3000K)

\_\_ 14PAR38WFL 14 Watt 60° wide flood

1/2" male threads. Mounts into any standard j-box or: Mounting **Accessories** 

GS2 Heavy-duty ground spike

\_\_ GS2BC Heavy-duty ground spike with cast brass cap

\_\_ JB Cast brass junction box


Brass tree-mounted junction box, single fixture TMJBmount, stainless steel strap (48, 72, or 96")

\_ TMJBX Brass tree-mounted junction box, single fixture

mount, stainless steel screws

Finish: Unfinished is standard; no specification required. The fixture will weather to a natural patina. The patina process is natural with brass and copper. Rate of patina and eventual color is dependent upon climate and proximity to the ocean. Thus, Beachside does not guarantee any specific appearance.



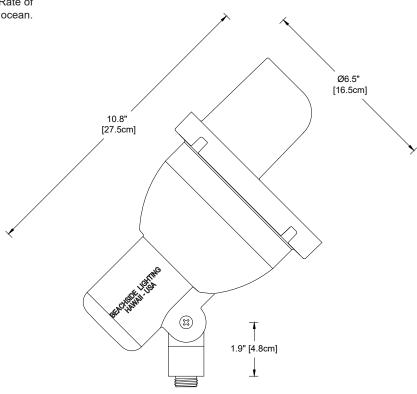

Weight: 8.6 lbs / 3.9 kg

IP66

10 year fixture warranty 3 year warranty on MR16 LED lamps



|  | Project By |  |      | Date |                |
|--|------------|--|------|------|----------------|
| For ordering purposes, please specify (example: M38—14PAR30SP—TMJB-72) |            |  |      |      | SP—TMJB-72)    |
|  | M38        |  |      | _    |                |
|  | Fixture    |  | Lamp |      | Accessory(ies) |