The R-Series LED pathlights are durable fixtures made from brass and copper. They are ideal for walkway and area lighting in any landscape theme and location.

Construction All brass components. 1/2" schedule 40 brass stem. 18-gauge copper

shade, underside powdercoated white.

Lens Frosted borosilicate glass, 4.8mm wall thickness

Stem Height 12 inches is standard. Custom heights upon request

> 2 2" [5 cm] 8" [20 cm] \_\_ 12 12" [30 cm] 16 16" [40 cm] 20" [51 cm] 20

## Voltage / Lamp Options

GU5.3 • MR16 LED • Remote transformer required. 12V

Cree 5 Watt AMBER (1500K) TURTLE FRIENDLY 5W-A 5W 5 Watt Warm White (3000K) Cree 7 Watt Warm White (3000K) Lumiled chip 7W \_\_ 8W 8 Watt Warm White (3000K) Soraa chip

Triple LED Module • Remote transformer required.

\_\_ 7W-A 7 Watt AMBER (1500K) TURTLE FRIENDLY Cree XPE2 chip

8W-RO 8 Watt RED-ORANGE (1000K) TURTLE FRIENDLY

\_\_ 11W Cree XPG2 chip 11 Watt Warm White (3000K)\*

\* Also available in 2700K. Add color suffix to lamp specification, e.g. "11W-2700K"

120V / 230V **GU10** • MR16 LED

Cree chip 5W-A 5 Watt AMBER (1500K) TURTLE FRIENDLY

\_\_\_ 8W 8 Watt Warm White (3000K) Soraa chip

Optical \_ HSR Half shield for 180° illumination Accessory

Mounting **Accessories**  1/2" male threads. Mounts into any standard j-box or:

Brass Surface Box for concrete or wood surface-mount BSB

applications

GS2 Heavy-duty ground spike

GS2BC Heavy-duty ground spike with cast brass cap

\_\_ GS3R Heavy-duty ground spike with brass cap for telescoping

\_\_ GS4 Standard ground spike with cast brass cap (12V only)

\_\_ JB Cast brass junction box

Finish: Unfinished is standard; no specification required. The fixture will weather to a natural patina. The patina process is natural with brass and copper. Rate of patina and eventual color is dependent upon climate and proximity to the ocean. Thus, Beachside does not guarantee any specific appearance.


Weight: 3.7 lbs [1.7 kg] with 12" stem

**IP66** CSA Listed. file #190030 10 year fixture warranty 3 year warranty on MR16 LED lamps 3 year LED module warranty







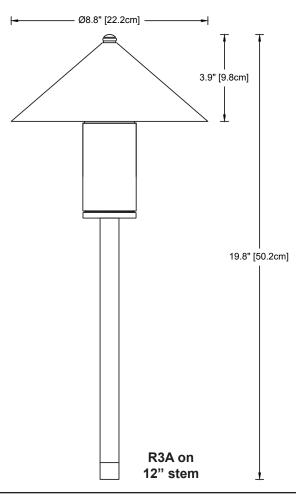

Project			Ву				Date	
For ordering purposes, please specify (example: R3A—120V—12—5W-A—HSR—GS2)								
R3A	_		_				_	
Fixture		Voltage		Stem Height		Lamp		Accessory(ies)