

X2-S

The X2-S is an unobtrusive, low-voltage, aimable, dual-head path light. More compact than a shaded path light, its minimalist design allows attention to focus on the lamp's extra-wide flood effect, not the fixture itself.



Construction All brass components. 1/8" [3mm] thick brass housing. 1/2" schedule 40 brass stem.

Lens Tempered soda lime glass

Voltage 12 Volts AC/DC with integral driver (9-15V input, dimmable below 9V). Remote transformer required.

Fixture Height Custom stem heights are available upon request. Standard overall height is 20".

— **20** 20" [51 cm]
— Custom height (in inches)

Lamps (2X) Triac dimmable: MLV >6% typ.

| | Beam/Field | Candela | Lumens | Efficacy | |
|----------------------------|--------------------|------------|--------|----------|----|
| Cree XPE2 LED | — 2W-A-NFL | 14° / 31° | 587 | 64 | 29 |
| 2 Watt AMBER (1700) | — 2W-A-FL | 29° / 61° | 140 | 53 | 24 |
| TURTLE FRIENDLY | — 2W-A-NO | 46° / 114° | 18 | 31 | 14 |
| Cree XPE2 LED | — 2W-RO-NFL | 13° / 28° | 1483 | 119 | 52 |
| 2 Watt | — 2W-RO-FL | 32° / 56° | 229 | 81 | 35 |
| RED-ORANGE (1000K) | — 2W-RO-NO | 49° / 114° | 32 | 32 | 14 |
| TURTLE FRIENDLY | | | | | |
| Cree XPG2 LED | — 3W-NFL | 17° / 37° | 1214 | 177 | 61 |
| 3 Watt | — 3W-FL | 30° / 62° | 395 | 156 | 54 |
| Warm White (3000K)* | — 3W-NO | 47° / 86° | 49 | 76 | 27 |

CRI 81

* Also available in 2700K. Add color suffix to lamp specification, e.g. "3W-NO-2700K"


Optical Accessories

- **BGS8** Brass glare shield, 45° cutoff
- **BGS8F** Brass glare shield, full cutoff
- **CTO-1/4-1.36** Color Temperature Orange filter 1/4
- **CTO-1/2-1.36** Color Temperature Orange filter 1/2
- **CTO-3/4-1.36** Color Temperature Orange filter 3/4

Mounting Accessories 1/2" male threads. Mounts into any standard j-box or:

- **BSB** Brass Surface Box for surface-mount applications on concrete or wood. Includes internal brass collar and stainless steel lag screws. 4.25" (11cm) diameter x 2.0" (5cm) high.
- **GS2** Heavy-duty ground spike
- **GS2BC** Heavy-duty ground spike with cast brass cap
- **GS3R** Heavy-duty ground spike with brass cap for tele-scoping fixture riser
- **JB** Cast brass junction box

Finish: Unfinished is standard; no specification required. The fixture will weather to a natural patina. The patina process is natural with brass and copper. Rate of patina and eventual color is dependent upon climate and proximity to the ocean. Thus, Beachside does not guarantee any specific appearance.

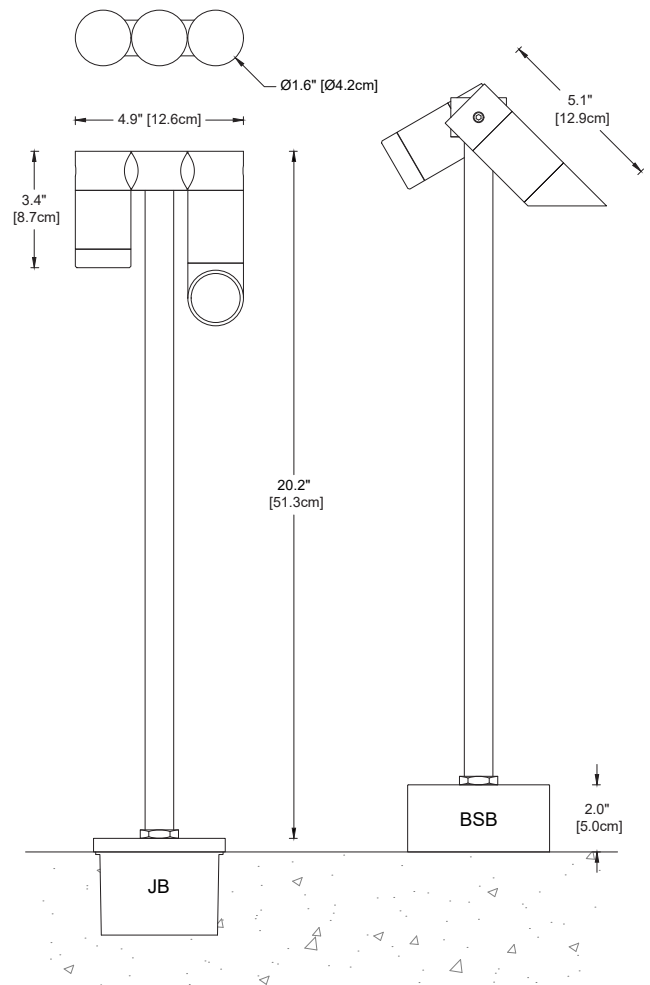

X2-S-20 on JB with one BGS8

X2-S-20 on BSB with one BGS8

IP 66
CSA Listed, file #190030
10 year fixture warranty
5 year Cree LED module warranty



| | | | | | |
|--|--------|--------|--------------------------|--------|---|
| Project | | By | | Date | |
| For ordering purposes, please specify (example: X2-S-20-2W-A-NO-BGS8-CTO-1/4-1.36-2W-A-NO-BGS8-CTO-1/4-1.36-BSB) | | | | | |
| X2-S | — | — | — | — | — |
| Fixture | Height | Lamp 1 | Accessory(ies) Lamp 1 | Lamp 2 | Accessory(ies) Lamp 2 Other Accessory(ies) |