

X2

The X2 is an unobtrusive, low-voltage, aimable, dual-head mini bollard. More compact than a shaded path light, its minimalist design allows attention to focus on the lamp's extra-wide flood effect, not the fixture itself.

Construction All brass components. 1/8" [3mm] thick brass housing. 1-1/4" schedule 40 brass stem.

Lens Tempered soda lime glass

Voltage 12 Volts AC/DC with integral driver (9-15V input, dimmable below 9V). Remote transformer required.

Fixture Height Custom stem heights are available upon request. Standard overall height is 20".

— **20** 20" [51 cm]
 — Custom height (in inches)

Lamps (2X) Triac dimmable: MLV >6% typ.

	Beam/Field	Candela	Lumens	Efficacy	
Cree XPE2 LED	— 2W-A-NFL	14° / 31°	587	64	29
2 Watt AMBER (1700)	— 2W-A-FL	29° / 61°	140	53	24
TURTLE FRIENDLY	— 2W-A-NO	46° / 114°	18	31	14
Cree XPE2 LED	— 2W-RO-NFL	13° / 28°	1483	119	52
2 Watt	— 2W-RO-FL	32° / 56°	229	81	35
RED-ORANGE (1000K)	— 2W-RO-NO	49° / 114°	32	32	14
TURTLE FRIENDLY					
Cree XPG2 LED	— 3W-NFL	17° / 37°	1214	177	61
3 Watt	— 3W-FL	30° / 62°	395	156	54
Warm White (3000K)*	— 3W-NO	47° / 86°	49	76	27

CRI 81

* Also available in 2700K. Add color suffix to lamp specification, e.g. "3W-NO-2700K"


Optical Accessories

- **BGS8** Brass glare shield, 45° cutoff
- **BGS8F** Brass glare shield, full cutoff
- **CTO-1/4-1.36** Color Temperature Orange filter 1/4
- **CTO-1/2-1.36** Color Temperature Orange filter 1/2
- **CTO-3/4-1.36** Color Temperature Orange filter 3/4

Mounting Accessories 1/2" male threads. Mounts into any standard j-box or:

- **BSB** Brass Surface Box for surface-mount applications on concrete or wood. Includes internal brass collar and stainless steel lag screws. 4.25" (11cm) diameter x 2.0" (5cm) high.
- **GS2BC** Heavy-duty ground spike with cast brass cap
- **JB** Cast brass junction box

Finish: Unfinished is standard; no specification required. The fixture will weather to a natural patina. The patina process is natural with brass and copper. Rate of patina and eventual color is dependent upon climate and proximity to the ocean. Thus, Beachside does not guarantee any specific appearance.

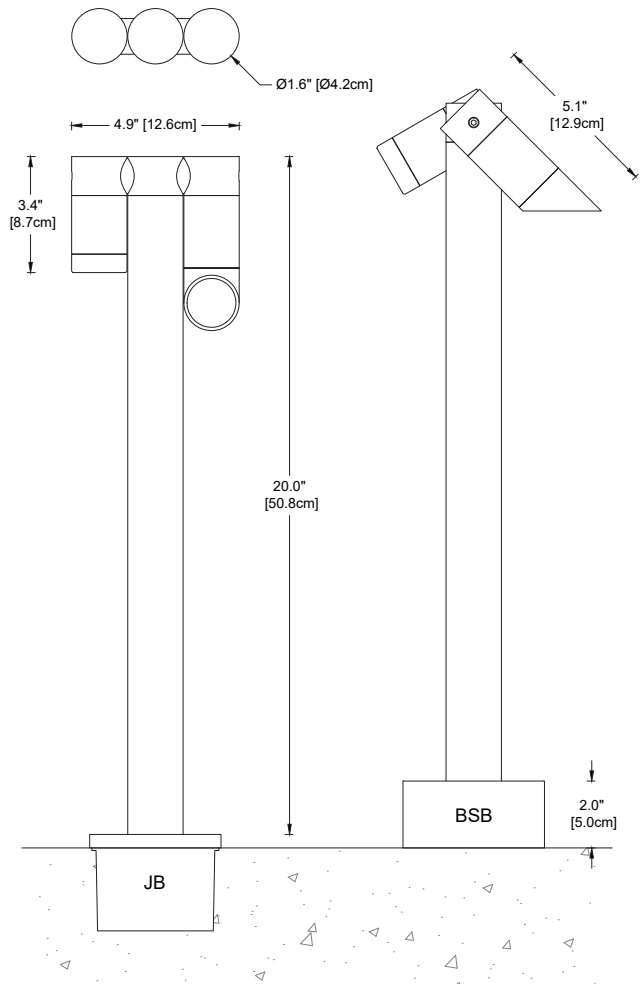

X2-20 on JB with one BGS8

X2-20 on BSB with one BGS8



IP 66
 CSA Listed, file #190030
 10 year fixture warranty
 5 year Cree LED module warranty

Project		By		Date	
For ordering purposes, please specify (example: X2-20-2W-A-NO-BGS8-CTO-1/2-1.36-2W-A-NO-BGS8-CTO-1/2-1.36-BSB)					
X2	—	—	—	—	—
Fixture	Height	Lamp 1	Accessory(ies) Lamp 1	Lamp 2	Accessory(ies) Lamp 2 Other Accessory(ies)