



8165 E Kaiser Blvd. Anaheim, CA 92808
www.lightlaboratory.com

Report No: L052112107



Report No: L052112107

Issue Date: 8/27/2021

Report Prepared For: Beachside Lighting
905 Kalaniana'ole Hwy. #2901, Kailua, HI 96734 USA

Model Number: E16-11W-930-NFL

Test: Photometric/Colorimetric/Electrical Test

Standards Used: Appropriate part or all test guidelines were used for test performed:
IESNA LM79: 2008 Approved Methods for Electrical and Photometric Measurements of Solid-State Lighting Products
ANSI NEMA ANSLG C78.377: 2008 Specification of the Chromaticity of Solid State Lighting Products
ANSI C82.77:2002: Harmonic Emission Limits-Related Quality Requirements for Lighting Equipment

Description of Sample: Client submitted the sample. Received in working and undamaged condition. No modifications were necessary.

Special Test Condition: Fixture is tested with no special conditions.

Sample Arrival Date: 7/26/21

Date of Tests: 8/2/21 - 8/3/21

Seasoning of Sample: No seasoning was performed in accordance with IESNA LM-79.

Equipment List

Equipment Used	Model No	Stock No	Calibration Due Date
Chroma Programmable AC Source	61604	PS-AC02	--
Yokogawa Digital Power Meter	WT210	MT-EL06-S4	4/7/23
HP Power Supply	6032A	PS-DC05-S2	--
Fluke Digital Thermometer	52K/J	MT-TP05	3/17/23
LLI Type C Goniophotometer System	RMG-C-MKII	CD-LL04-GC	--
LLI 2M Sphere	2MR97	CD-SN03-S2	--
LLI Spectroradiometer	SPR-3000	MT-SC01-S2	Before Use

General Information

Manufacturer:	Beachside Lighting
Model Number:	E16-11W-930-NFL
Driver Model Number:	N/A

Test Summary

Total Lumens:	728.10
Efficacy:	75.62
Color Redering Index:	91.9
Correlated Color Temperature:	2993
Input Voltage (VDC):	12.00
Input Current (Amp):	0.8024
Input Power (W):	9.63
Input Power Factor:	1.0000
Current ATHD (%):	N/A

Test Condition

Ambient Temperature (°C):	25.0
Stabilization Time (Hours):	1:00
Total Operating Time (Hours):	1:35


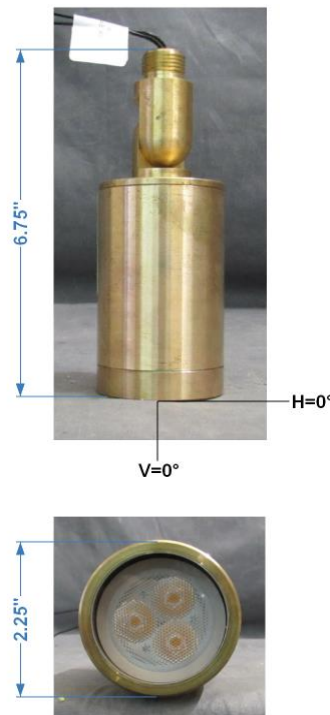


FIG. 1 LUMINAIRE

Colorimetry Test Results

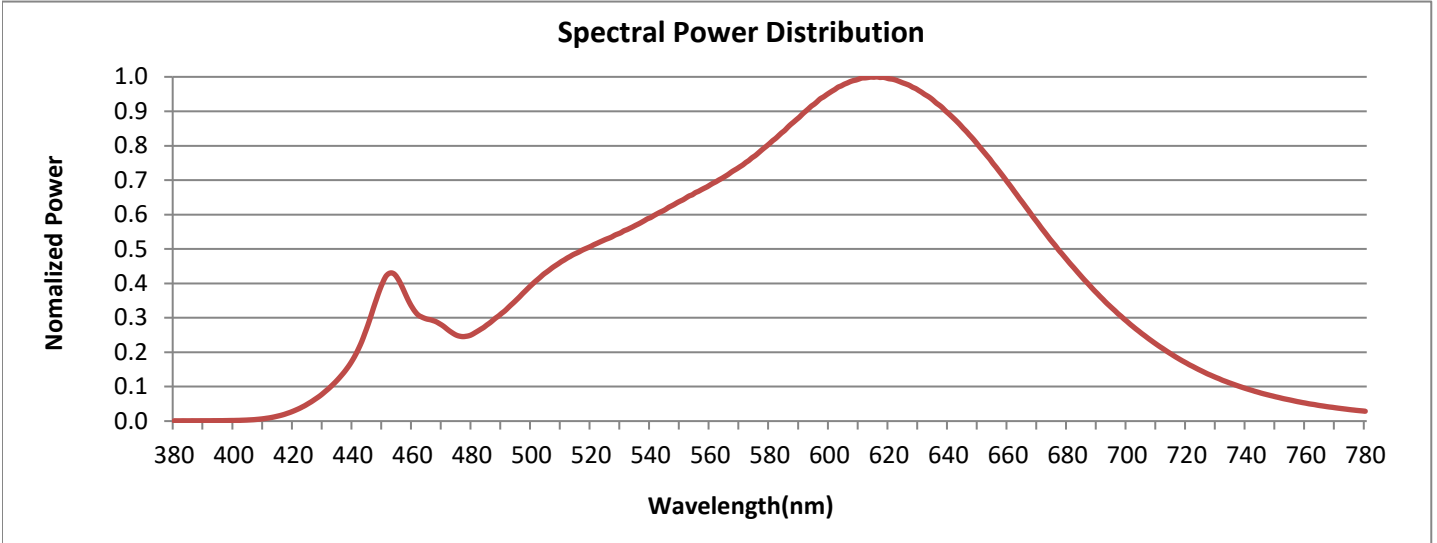


CRI & CCT

x	0.4403
y	0.4101
u'	0.2501
v'	0.5242
CRI	91.90
CCT	2993
Duv	0.00192

R Values

R1	91.34
R2	95.87
R3	99.29
R4	91.89
R5	91.63
R6	96.10
R7	90.78
R8	78.13
R9	51.03
R10	90.19
R11	93.06
R12	82.90
R13	92.51
R14	99.37
R15	86.03

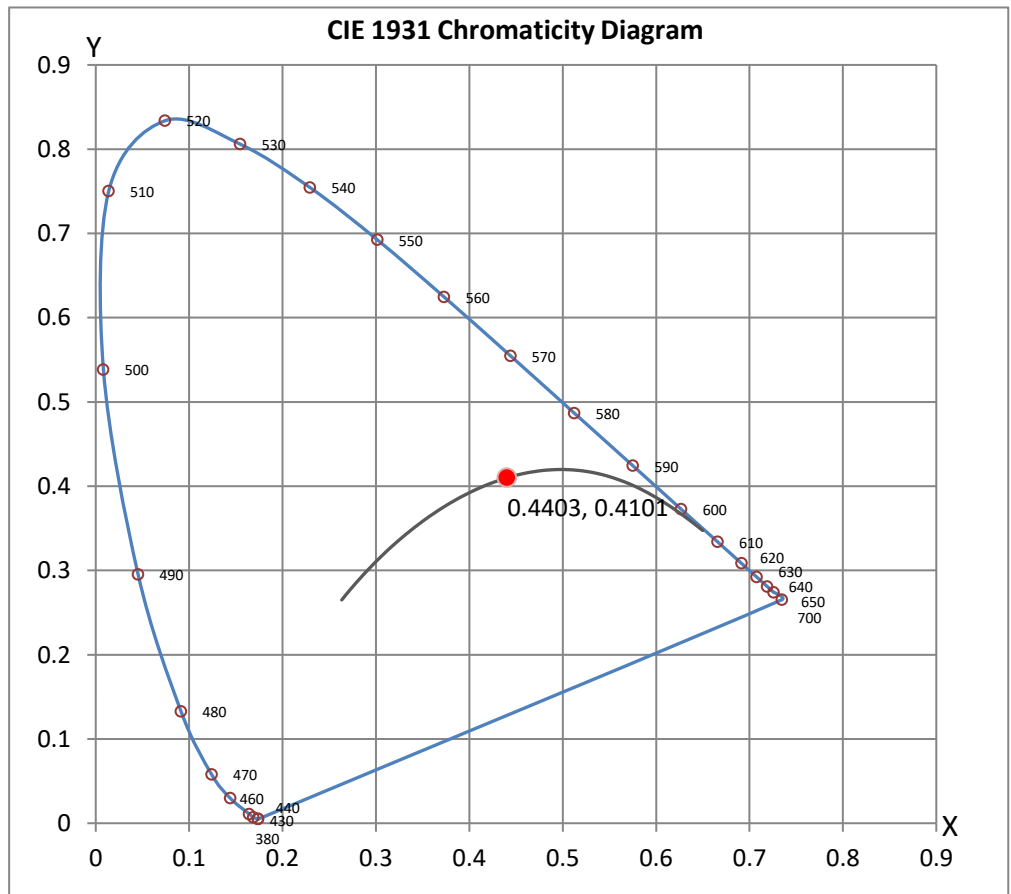

Test Methods

Photometric Measurements - Goniophotometer

A Custom Light Laboratory Type C Rotating Mirror Goniophotometer was used to measure candelas(intensity) at each angle of distribution as defined by IESNA for the appropriate fixture type.

Ambient temperature is set to 25°C and is measured from the center of the fixture, within 1ft from the outside of the fixture. Temperature is maintained at 25°C throughout the testing process and the sample is stabilized for at least 30mins and longer as necessary for the sample to achieve stabilization.

Electrical measurements are measured using the listed equipment.

Spectral Measurements - Integrating Sphere

A Sensing Spectroradiometer SPR-3000, in conjunction with Light Laboratory 2 meter integrating sphere was used to measure chromaticity coordinates, correlated color temperature(CCT) and the color rendering index(CRI) for each sample.

Ambient temperature is set to 25°C and is measured from the center of the fixture, within 1ft from the outside of the fixture. Temperature is maintained at 25°C throughout the testing process and the sample is stabilized for at least 30mins and longer as necessary for the sample to achieve stabilization.

Electrical measurements are measured using the listed equipment.

Disclaimers:

This report must not be used by the customer to claim product certification, approval or endorsement by NVLAP, NIST or any agency of Federal Government.

Report Prepared by : Kunjan Modi

Test Report Reviewed by:



Steve Kang
Quality Assurance

**Attached are photometric data reports.*



8165 E. Kaiser Blvd. Anaheim, CA 92808
www.lightlaboratory.com

Photometric Test Report

IES ROAD REPORT
PHOTOMETRIC FILENAME : 052112107.IES

DESCRIPTIVE INFORMATION (From Photometric File)

IESNA:LM-63-2002
[TEST] L052112107
[TESTLAB] LIGHT LABORATORY, INC. (www.lightlaboratory.com)
[ISSUE DATE] 08/10/21
[MANUFAC] Beachside Lighting
[LUMCAT] E16-11W-930-NFL
[LUMINAIRE] Directional Fixture on Knuckle, Narrow Flood
[BALLASTCAT] N/A
[OTHER] INDICATING THE CANDELA VALUES ARE ABSOLUTE AND
[MORE] SHOULD NOT BE FACTORED FOR DIFFERENT LAMP RATINGS.
[INPUT] 12.001VDC
[TEST PROCEDURE] IESNA:LM-79-08


CHARACTERISTICS

IES Classification	Type VS
Longitudinal Classification	Very Short
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	728
Downward Total Efficiency	N.A. (absolute)
Total Luminaire Efficiency	N.A. (absolute)
Luminaire Efficacy Rating (LER)	76
Total Luminaire Watts	9.63
Ballast Factor	1.00
Upward Waste Light Ratio	0.00
Maximum Candela	2299
Maximum Candela Angle	20H 1V
Maximum Candela (<90 Degrees Vertical)	2299
Maximum Candela Angle (<90 Degrees Vertical)	20H 1V
Maximum Candela At 90 Degrees Vertical	0 (0.0% Luminaire Lumens)
Maximum Candela from 80 to <90 Degrees Vertical	2 (0.3% Luminaire Lumens)
Cutoff Classification (deprecated)	N.A. (absolute)


IES ROAD REPORT
PHOTOMETRIC FILENAME : 052112107.IES

LUMINAIRE CLASSIFICATION SYSTEM (LCS)

	Lumens	% Lamp	% Luminaire
FL - Front-Low (0-30)	321.1	N.A.	44.1
FM - Front-Medium (30-60)	43.3	N.A.	6.0
FH - Front-High (60-80)	5.9	N.A.	0.8
FVH - Front-Very High (80-90)	0.8	N.A.	0.1
BL - Back-Low (0-30)	310.4	N.A.	42.6
BM - Back-Medium (30-60)	40.2	N.A.	5.5
BH - Back-High (60-80)	5.6	N.A.	0.8
BVH - Back-Very High (80-90)	0.8	N.A.	0.1
UL - Uplight-Low (90-100)	0.0	N.A.	0.0
UH - Uplight-High (100-180)	0.0	N.A.	0.0
Total	728.1	N.A.	100.0
BUG Rating	B1-U0-G0		

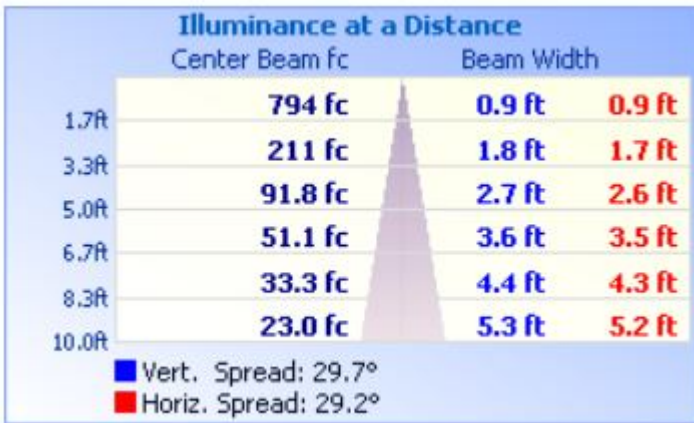


COEFFICIENTS OF UTILIZATION

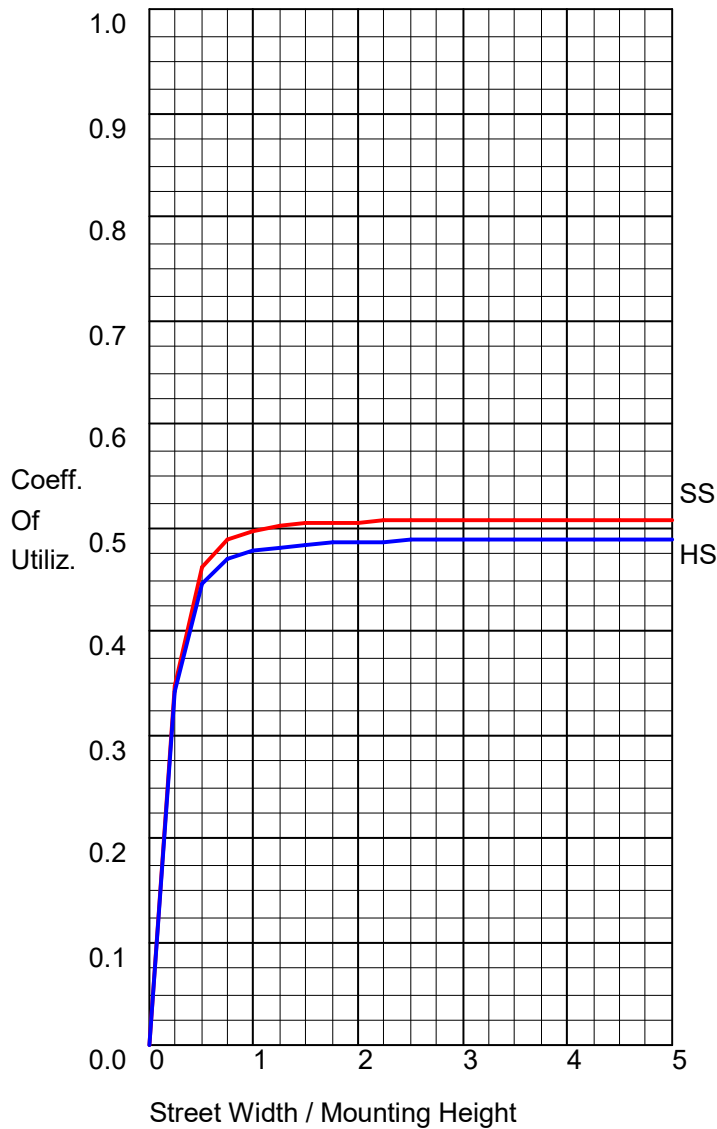

FLUX DISTRIBUTION


	Lumens	Percent Of Luminaire
Downward Street Side	371.1	51.0
Downward House Side	357.0	49.0
Downward Total	728.1	100.0
Upward Street Side	0.0	0.0
Upward House Side	0.0	0.0
Upward Total	0.0	0.0
Total Flux	728.1	100.0

POLAR GRAPH

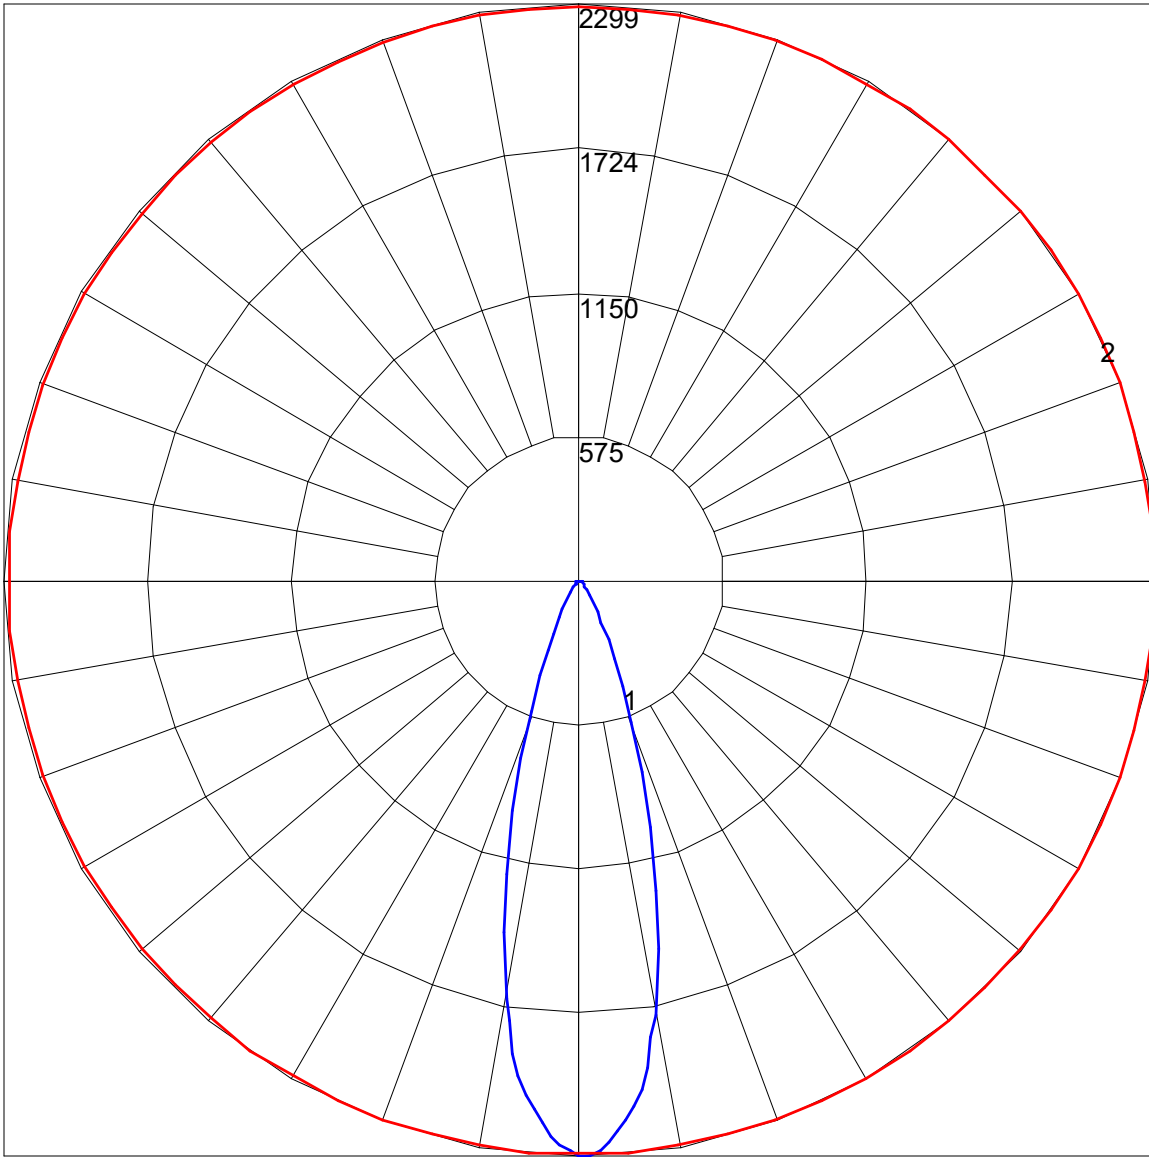

Maximum Candela = 2299 Located At Horizontal Angle = 20, Vertical Angle = 1
1 - Vertical Plane Through Horizontal Angles (20 - 200) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (1) (Through Max. Cd.)

LUMINAIRE CLASSIFICATION SYSTEM (LCS) GRAPH

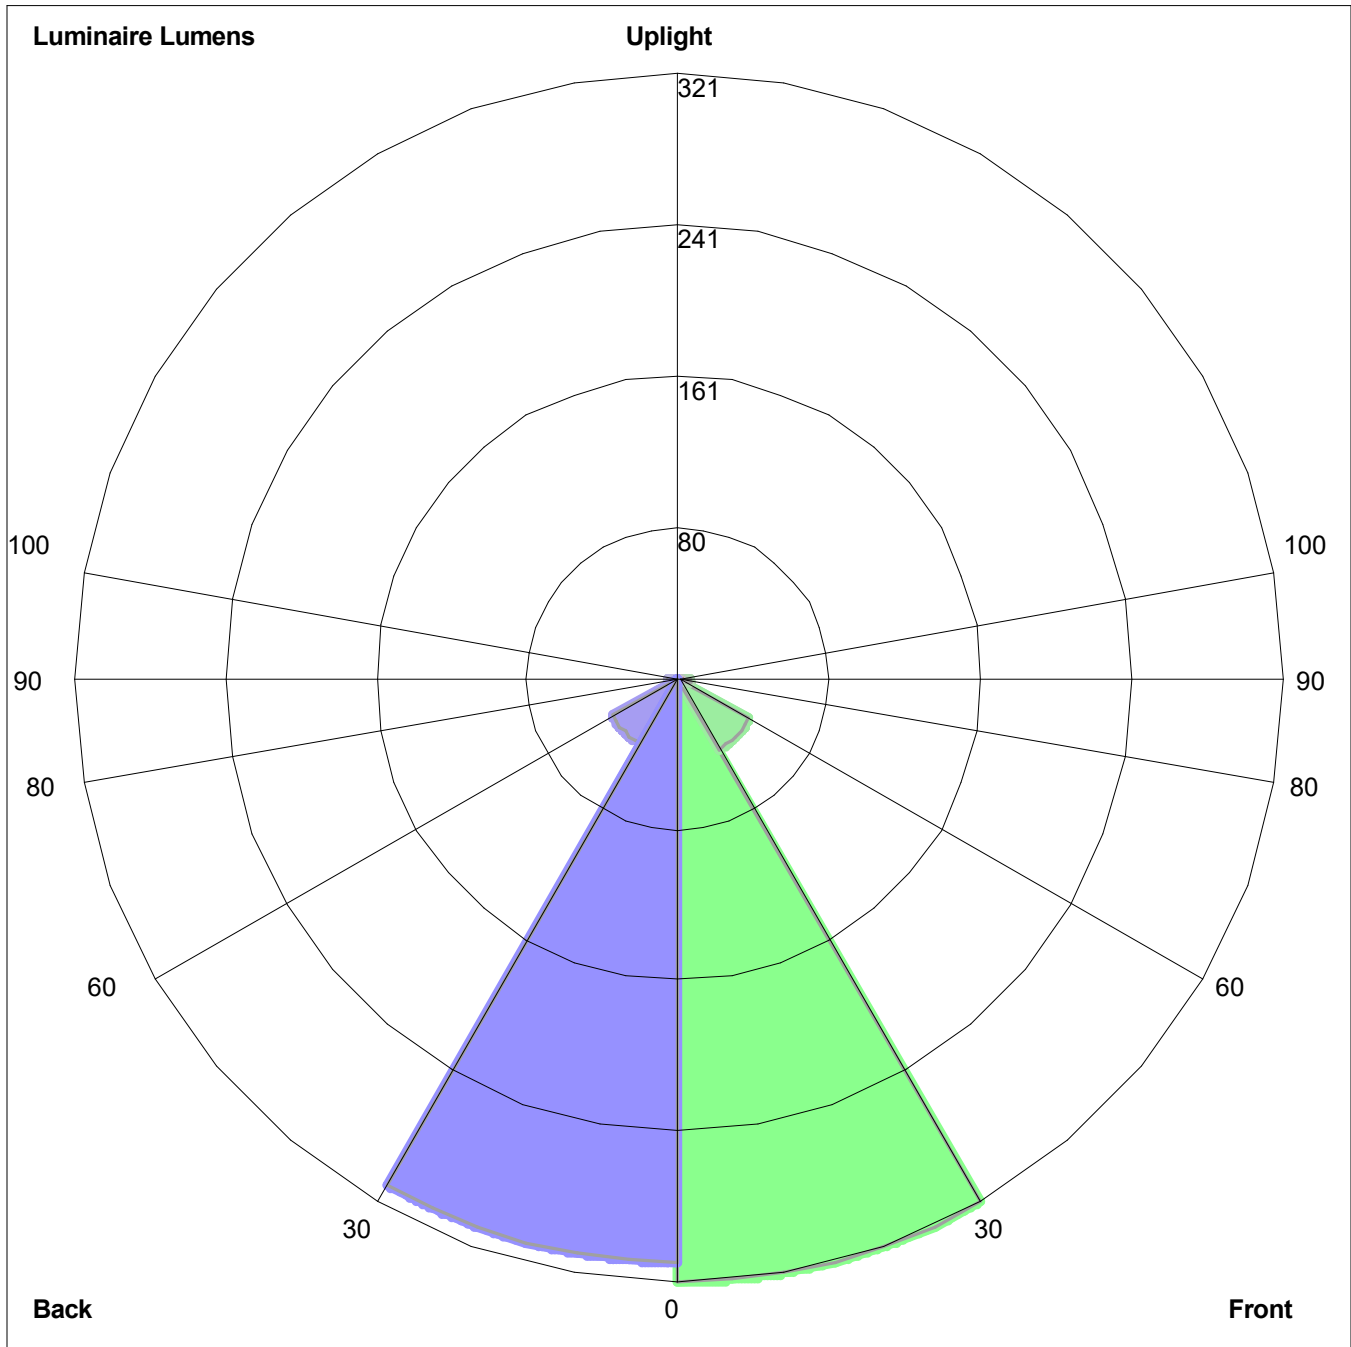

Luminaire Lumens:
Front: Low=321.1, Medium=43.3, High=5.9, Very High=0.8
Back: Low=310.4, Medium=40.2, High=5.6, Very High=0.8
Uplight: Low=0.0, High=0.0

BUG Rating : B1-U0-G0