

STL-WW / -MV / -A

LAMP TYPE: 12 integrated LEDs, white or amber
VOLTAGE (STL-MV, STL-A): 100-277V, non-dimmable
VOLTAGE (STL-WW): 120V only; dimmable
Suitable for indoor or outdoor use.

WARNING — This fixture must be installed in accordance with the National Electric Code and/or local codes. Failure to do so may result in serious personal injury or death. Wiring must be done by a licensed electrician.

SAVE THESE INSTRUCTIONS

INSTALLATION

This product is designed to install into any single-gang, recessed junction box.

1. Verify that the power is off.
2. For exterior applications, place the Gasket (included) over the Module, snug against the back of the Faceplate.
3. If using the optional SGBX-SS junction box, be sure to mount it so the face of the box is flush with the finished surface.
4. Connect green ground wire from power supply to junction box.
5. Connect the supply leads from the electrical outlet box to the fixture wire leads using the supplied silicone-filled wire nuts. Connect white supply wire (neutral) to white fixture wire and black supply wire (hot) to black fixture wire.
6. Position Steplight assembly into junction box while carefully tucking excess wire out of the way. Note orientation of Faceplate for proper installation, especially in wet locations — louvers must be directed downwards.
7. Use a 5/64 hex wrench to secure Steplight assembly to junction box with (2) #6-32 flat head socket screws (included) as shown in Figure 1.

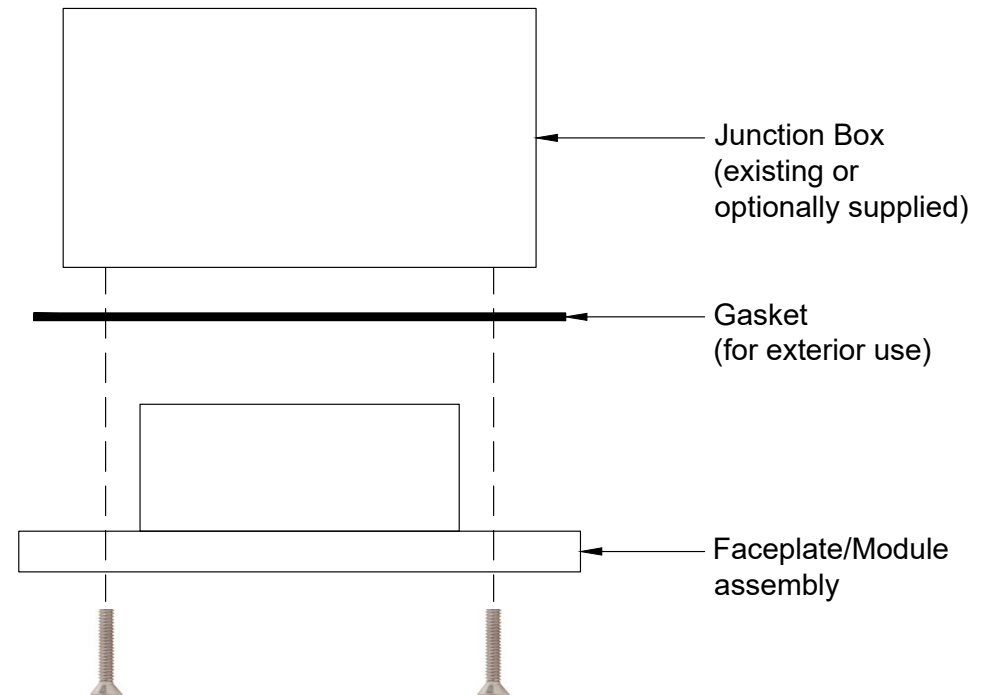


Figure 1



808-405-6732

www.BeachsideLighting.com

CSA Listed, file # 190030

08/2020