

# L-004

The L-004 is a bell-type pathlight made from brass and copper. Ideal for walkways and area lighting in any landscape theme and location.




**Construction:** All brass components.  
**Voltage:** 12 Volts, Remote transformer required.

**Lamps:**  
 S8 double-contact bayonet socket, 26 Watts maximum  
 — **2W-S8-DC** 2 Watt LED  
 — **13W** 13 Watt Incandescent  
 — **18W** 18 Watt Incandescent  
 — **26W** 26 Watt Incandescent

**Mounting:** 1/2" male threads. Mounts into any standard j-box or:  
**Accessories:**  
 — **GS2** Heavy-duty ground spike  
 — **GS2BC** Heavy-duty ground spike with cast brass cap  
 — **GS4** Standard ground spike with cast brass cap  
 — **JB** Cast brass junction box

**Finish:** Unfinished is standard; no specification required. The fixture will weather to a natural patina. The patina process is natural with brass and copper. Rate of patina and eventual color is dependent upon climate and proximity to the ocean. Thus, Beachside does not guarantee any specific appearance.

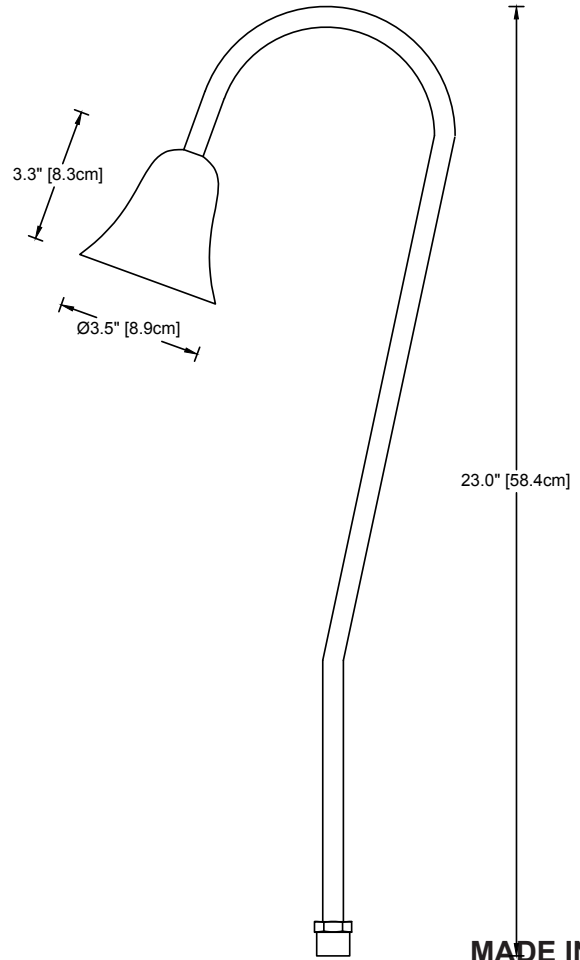

**MADE IN USA**

CSA Listed, file #190030  
 10 year fixture warranty

### Horizontal Footcandles at Radius from Fixture Base

Lamp	1'	2'	3'	4'	5'	6'
<b>2W-S8-DC</b>	9.3	2.9	1.4	1.1	0.8	0.7
<b>13W</b>	8.3	3.0	1.8	1.3	1.0	0.8
<b>18W</b>	12.2	3.8	1.9	1.4	1.1	0.9
<b>26W</b>	17.5	5.5	2.7	2.0	1.5	1.3

Project	By	Date
For ordering purposes, please specify (example: <b>L-004—18W—GS2</b> )		
<b>L-004</b>	—	—
Fixture	Lamp	Accessory