

L-011-30-BGS-SA-120V

LAMP TYPE: 120V MR16 GU10 bi-pin base, Maximum 20 Watts LED

SUITABLE FOR WET LOCATIONS. SUITABLE FOR INDOOR AND OUTDOOR USE.



This fixture is to be mounted on a vertical surface such as a tree trunk or wall via a canopy and aimed downward, perpendicular to the ground. The knuckle features a limiting mechanism to ensure that the downward-facing luminaire is not raised more than 30° from vertical to maintain Dark Sky compliance.



WARNING — RISK OF ELECTRIC SHOCK. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved. Failure to do so may result in serious personal injury or death.



INSTALLATION

This fixture is to be mounted to a vertical surface and aimed downward for Dark Sky compliance.

1. Verify that the power is off.
2. Feed fixture leads through the mounting accessory. Thread fixture securely into mount.
3. Use silicone-filled wire nuts to join fixture wires and wires from power source as shown in the diagram: black leads connect to hot, white to neutral, and green to ground. Use silicone or electrical tape around wire nuts to ensure proper connection.
4. Mounting accessory must be affixed to a vertical surface (see accessory instructions). Rotate fixture to point straight down and lock in place by tightening the larger of the two set screws in the Knuckle with a 3/32" hex wrench. (The smaller set screw is permanently installed and should not be loosened.)
5. The fixture head can be aimed by loosening the bolt in the Knuckle with a 5/32" hex wrench. To maintain Dark Sky compliance, fixture will not adjust more than 30° from vertical.

RELAMPING

1. Unscrew Housing from Base by turning it counterclockwise.
2. Hold Lamp at its base and rotate it about 1/4 turn counterclockwise. Pull up to remove.
3. Insert pins of new Lamp into Socket and turn clockwise until it stops.
4. Screw Housing back onto fixture Base.

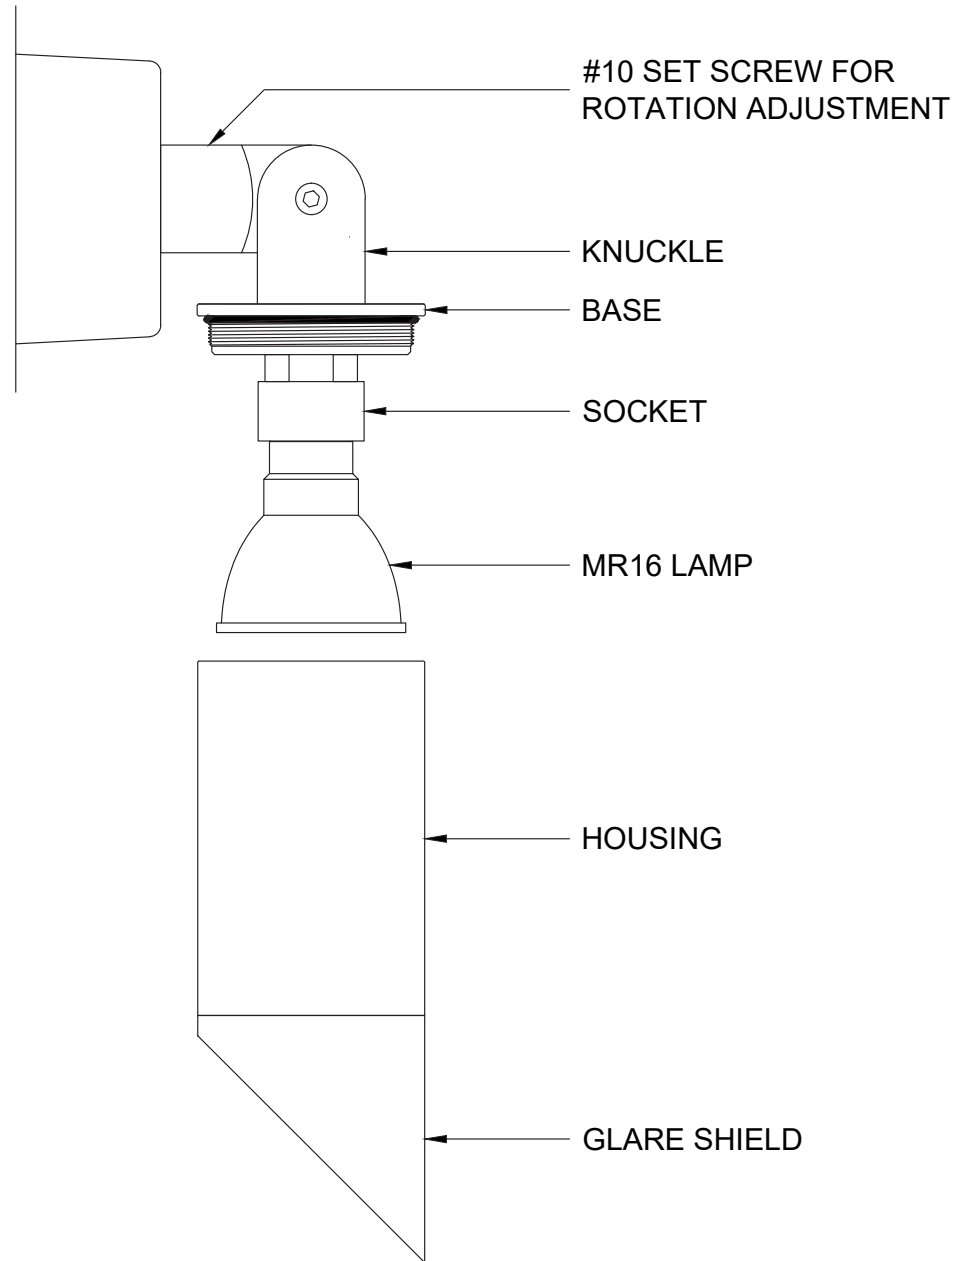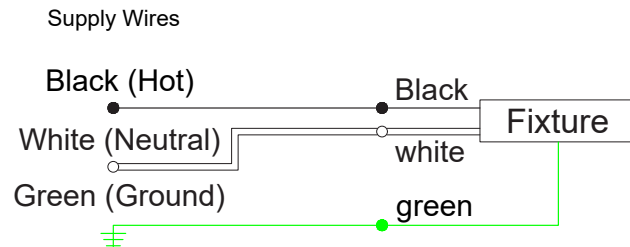

CSA Listed, File # 190030
www.BeachsideLighting.com
808-405-6732



09/22