L-011-P-CM2

The L-011-P-CM2 is a double, brass, projection fixture on a 4.75" [12.1cm] canopy for ceiling- or wall-mounted applications.

Construction All brass components. 0.140" [3.6mm] thick brass housings.

Lenses Dual Convex Optical Glass

Mounting Brass canopy mounts onto standard recessed 4" [10cm]

round bell-type j-box with hole spacing at 3.5" [9cm] on center (supplied by others). Universal crossbar (supplied) can be used for bell-type j-box with hole spacing at 2.75" [7cm] on

center.

L-011-P-CM2 12 Volts • GU5.3 MR16 • Remote transformer required

L-011-P-CM2-120V / -230V 120/230 Volts • GU10 MR16

Soraa chipset ___ **8W-NFL-27-120V** 8 Watt LED (2700K) 25° narrow flood

8W-NFL-30-120V 8 Watt LED (3000K) 25° narrow flood

ballast required

Warm White (3000K) — MH20MR16SP 20 Watt metal halide 12° spot 39 Watt metal halide 12° spot 39 Watt metal halide 12° spot

Optical __ BGS9 Brass glare shield, 45° cutoff
Accessories ___ Metal gabas are 8 mill stainless steel 51 5mm

Metal gobos are 8 mil stainless steel, 51.5mm diameter, with high levels of nickel and chromium to provide long life and excellent image quality. Any gobo pattern, including custom designs, can be ordered with up to a 35mm diameter pattern

area, though 29mm is recommended. **AMPH** Amorphous

__ EP Egyptian Palms
__ WP Wild Palms

CUSTOM Consult sales rep for art specifications

Mounting __ SA Sure Aim locking rotation accessory 4.75" (12.1cm) Square brass canopy substi-


tution for standard round canopy.

Finish: Unfinished is standard; no specification required. The fixture will weather to a natural patina. The patina process is natural with brass and copper. Rate of patina and eventual color is dependent upon climate and proximity to the ocean. Thus, Beachside does not guarantee any specific appearance.

Lamp 1



Metal Halide version shown on SQ2 square canopy substitution

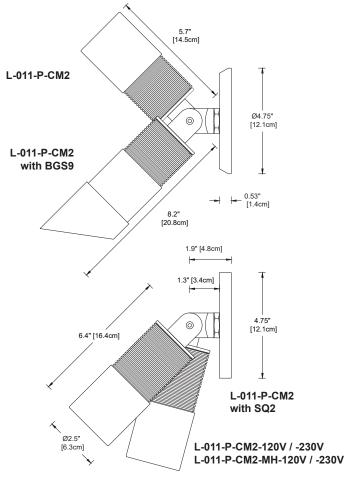




Weight (12V): 5.9 lbs / 2.7 kg 120/230V & MH: 6.8 lbs / 3.1 kg

IP 66 10 year fixture warranty 3 year warranty for MR16 lamps

Fixture





Lamp 2



Gobo - lamp 2



Accessories

Project By Date

For ordering purposes, please specify (example: L-011-P-CM2-120V—8W-SP—AMPH—8W-NFL-27-120V—AMPH—SA—BGS9)
L-011-P-CM2- __ __ __ __

Gobo - lamp 1