

# OHE-12V-3x12

The OHE-12V-3x12 is a low-voltage, electric decorative torch. Made from solid brass, the fixture uses frosted borosilicate glass to diffuse the LED source from below for decorative lighting laterally as well as uplighting through the top of the glass. This luminaire also is available with an amber LED source that closely mimics the color of a traditional flame torch.

**OHE-12V-3x12** Standard version for pole-mount applications (pole by others)  
 Supplied with 1" male x slip copper adapter fitting to work with 1" or 28 mm copper tubing (by others) and 10 ft (3.05 m) of wire to be fed through customer-supplied tubing. Tubing is to be hard packed in softscape with minimum 15" (38 cm) below grade.

**OHE-12V-3x12-SM** Surface-mount version for attachment to raised mounting accessory or flat canopy.  
 Supplied with 1/2" male thread to adapt to a variety of mounting accessories.

**Construction** Solid brass decorative cylinder, 1/32"-thick, secured with stainless steel fasteners. Brass 1" bottom coupling and copper 1" male x slip adapter.

**Lens** Cylindrical frosted borosilicate glass, 4.8 mm wall thickness, with brass end cap.

**Height** 12-inch high decorative cylinder. 15-1/4" overall height, including bottom coupling and copper adapter. (13.2" for SM version) Customer supplied pole will determine overall fixture height.

**Voltage** 9V - 15V AC/DC. Remote transformer or constant voltage (12V) output driver required.

**Lamps** MR11 LED, G4 base  
 \_\_\_ **2W-A-MR11-NFL** 2 Watt **AMBER** (1500K)  
 \_\_\_ **2W-MR11-NFL-27** 2 Watt narrow flood (2700K)  
 \_\_\_ **2W-MR11-NFL-30** 2 Watt narrow flood (3000K)


**Mounting Accessories** for Surface Mount (SM) version only  
 \_\_\_ **BSB** Brass surface box (heavy-duty 2-part box for concrete surface applications)  
 \_\_\_ **CM-M1** Flat canopy with brass crossbar to mount to most recessed junction boxes (by others)  
 \_\_\_ **JB** Cast brass junction box for recessed concrete applications (only cover is above concrete)  
 \_\_\_ **TDM1** Brass deck mount for wood applications (surface wiring or wiring from below)

**Finish:** Unfinished is standard; no specification required. The fixture will weather to a natural patina. The patina process is natural with brass and copper. Rate of patina and eventual color is dependent upon climate and proximity to the ocean. Thus, Beachside does not guarantee any specific appearance.

10 year fixture warranty  
 3 year warranty on MR11 LED lamps



Shown with bronze acid finish

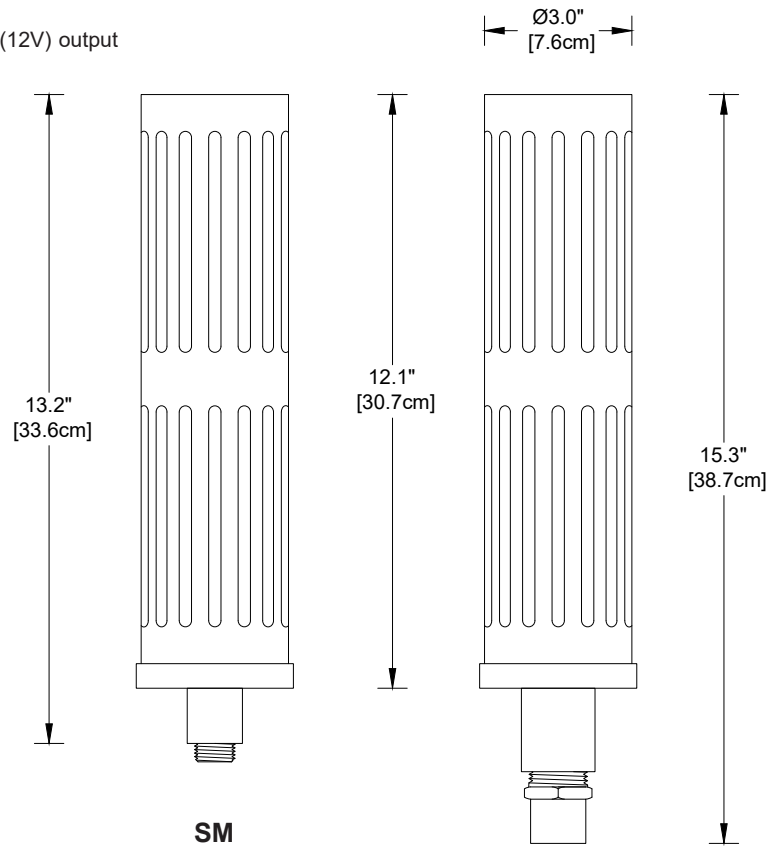

Project	By	Date
For ordering purposes, please specify (example: OHE-12V-3x12-SM—2W-MR11-NFL-30—JB)		
<b>OHE-12V-3x12</b>		
Fixture	Lamp	Accessory