R7

The R-Series LED pathlights are durable fixtures made from brass and copper. They are ideal for walkway and area lighting in any landscape theme and location.

Construction All brass components. 1/2" schedule 40 brass stem. 18-gauge copper

shade, underside powdercoated white.

Lens Frosted borosilicate glass, 4.8mm wall thickness

Stem Height 12 inches is standard. Custom heights upon request

Voltage / Lamp Options

12V GU5.3 • MR16 LED • Remote transformer required.

 Cree
 5W-A
 5 Watt AMBER (1500K) TURTLE FRIENDLY

 Cree
 5W
 5 Watt Warm White (3000K)

 Lumiled chip
 7W
 7 Watt Warm White (3000K)

 Soraa chip
 8W
 8 Watt Warm White (3000K)

Triple LED Module • Remote transformer required.

Cree XPE2 chip ___ **7W-A** 7 Watt **AMBER** (1500K) **TURTLE FRIENDLY**

8W-RO 8 Watt RED-ORANGE (1000K) TURTLE FRIENDLY

* Also available in 2700K. Add color suffix to lamp specification, e.g. "11W-2700K"

120V / 230V GU10 • MR16 LED

___ 8W

Cree chip ___ 5W-A 5 Watt AMBER (1500K) TURTLE FRIENDLY

Optical __ HSR Half shield for 180° illumination

Mounting Accessories

Accessory

Soraa chip

1/2" male threads. Mounts into any standard j-box or:

8 Watt Warm White (3000K)

BSB Brass Surface Box for concrete or wood surface-mount

applications

_ GS2 Heavy-duty ground spike

GS2BC Heavy-duty ground spike with cast brass capGS3R Heavy-duty ground spike with brass cap for telescoping

riser

__ GS4 Standard ground spike with cast brass cap (12V only)

__ **JB** Cast brass junction box

Finish: Unfinished is standard; no specification required. The fixture will weather to a natural patina. The patina process is natural with brass and copper. Rate of patina and eventual color is dependent upon climate and proximity to the ocean. Thus, Beachside does not guarantee any specific appearance.


Weight: 3.7 lbs [1.7 kg] with 12" stem

IP66
CSA Listed, file #190030
10 year fixture warranty
3 year warranty on MR16 LED lamps
3 year LED module warranty







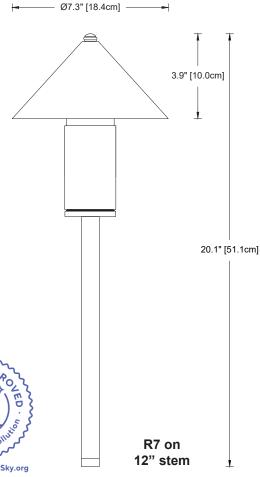

Project		Ву		Date
For ordering purposes, please specify (example: R7—120V—12—5W-A—HSR—GS2)				
R7				
Fixture	Voltage	Stem Height	Lamp	Accessory(ies)