

X2



**Wildlife Lighting
Certification Number
#2019-232**

The X2 is an unobtrusive, low-voltage, dual-head mini bollard downlight. More compact than a shaded path light, its minimalist design allows attention to focus on the lamp's extra-wide flood effect, not the fixture itself.

Construction All brass components. 1/8" [3mm] thick brass housing. 1-1/4" schedule 40 brass stem.

Lens Tempered soda lime glass

Voltage 12 Volts AC/DC with integral driver (9-15V input, dimmable below 9V). Remote transformer required.

Fixture Height Custom stem heights are available upon request. Standard overall height is 20".

___ **20** 20" [51 cm]
___ Custom height (in inches)


Lamps (2X) Triac dimmable: MLV >6% typ.

		Beam/Field	Candela	Lumens	Efficacy
Cree XPE2 LED 2 Watt AMBER (1700)	___ 2W-A-NFL	14° / 31°	587	64	29
	___ 2W-A-FL	29° / 61°	140	53	24
	___ 2W-A-NO	46° / 114°	18	31	14
Cree XPE2 LED 2 Watt RED-ORANGE (1000K)	___ 2W-RO-NFL	13° / 28°	1483	119	52
	___ 2W-RO-FL	32° / 56°	229	81	35
	___ 2W-RO-NO	49° / 114°	32	32	14

Optical Accessories
___ **BGS8** Brass glare shield, 45° cutoff
___ **BGS8F** Brass glare shield, full cutoff

Mounting Accessories 1/2" male threads. Mounts into any standard j-box or:
___ **BSB** Brass Surface Box for surface-mount applications on concrete or wood. Includes internal brass collar and stainless steel lag screws. 4.25" (11cm) diameter x 2.0" (5cm) high.
___ **GS2BC** Heavy-duty ground spike with cast brass cap
___ **JB** Cast brass junction box

Finish: Unfinished is standard; no specification required. The fixture will weather to a natural patina. The patina process is natural with brass and copper. Rate of patina and eventual color is dependent upon climate and proximity to the ocean. Thus, Beachside does not guarantee any specific appearance.

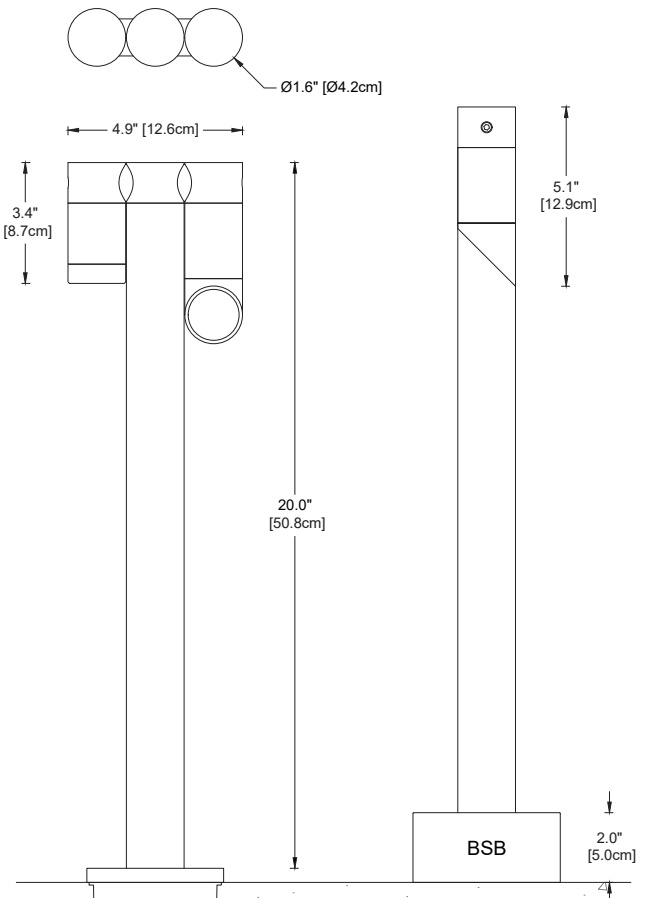

**X2-20 on JB
with one BGS8**

**X2-20 on BSB
with one BGS8**

IP 66
CSA Listed, file #190030
10 year fixture warranty
5 year Cree LED module warranty



Project _____		By _____		Date _____		
For ordering purposes, please specify (example: X2-20-2W-A-NO-BGS8-2W-A-NO-BGS8-BSB)						
X2	___	___	___	___	___	___
Fixture	Height	Lamp 1	Accessory(ies) Lamp 1	Lamp 2	Accessory(ies) Lamp 2	Other Accessory(ies)