

# L-010-A / L-010-A-CR

The L-010-A is a brass and composite, in-ground uplight. An internal bracket assembly allows 360° rotation and angling of the lamp up to 16° before any cutoff. The integrated junction box at the base of the housing has two 3/4" NPT-tapped holes for conduit entry on the bottom and two more on opposite side walls.



Fixture shown with optional PG protection grate and BGS2 glare shield accessories



- L-010-A** At-grade application for soil, gravel, or brick
- L-010-A-CR** Same as L-010-A but with a **CONCRETE RING** for fully recessed concrete installation
- Construction** Cast brass cover on composite housing
- Lens** Clear, tempered glass.
- Voltage** 120 or 230 Volts AC with integral ballast
- Lamps**

	<input type="checkbox"/> <b>MH20MR16SP</b>	20 Watt	12° spot
	<input type="checkbox"/> <b>MH20MR16NFL</b>	20 Watt	25° narrow flood
MR16 Ceramic Metal Halide, GX10 39 Watts maximum	<input type="checkbox"/> <b>MH20MR16FL</b>	20 Watt	42° flood
	<input type="checkbox"/> <b>MH39MR16SP</b>	39 Watt	12° spot
	<input type="checkbox"/> <b>MH39MR16NFL</b>	39 Watt	25° narrow flood
	<input type="checkbox"/> <b>MH39MR16FL</b>	39 Watt	42° flood

- Accessories**  **BGS2** Brass glare shield
- PG** Brass protection grate

- Optical Accessories**  **FR-MR16** Frosted lens
- HL-MR16** Honeycomb louver, 1/8" [3mm] thick
- PR-MR16** Prismatic spread lens
- RT-MR16** Rectilinear spread lens

**Finish:** Unfinished is standard; no specification required. The fixture will weather to a natural patina. The patina process is natural with brass and copper. Rate of patina and eventual color is dependent upon climate and proximity to the ocean. Thus, Beachside does not guarantee any specific appearance.

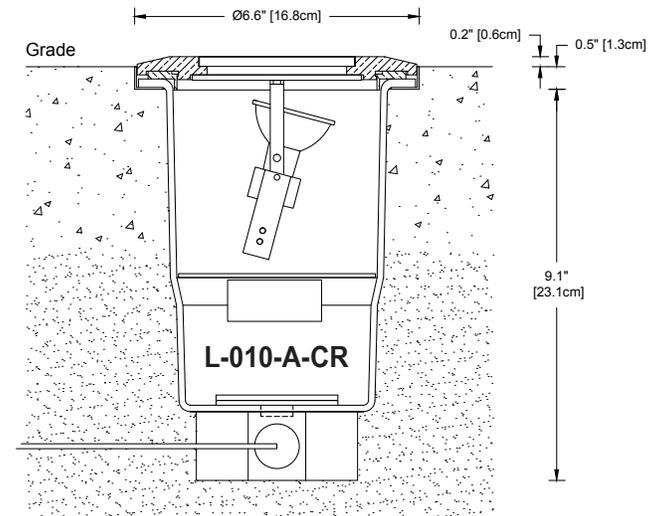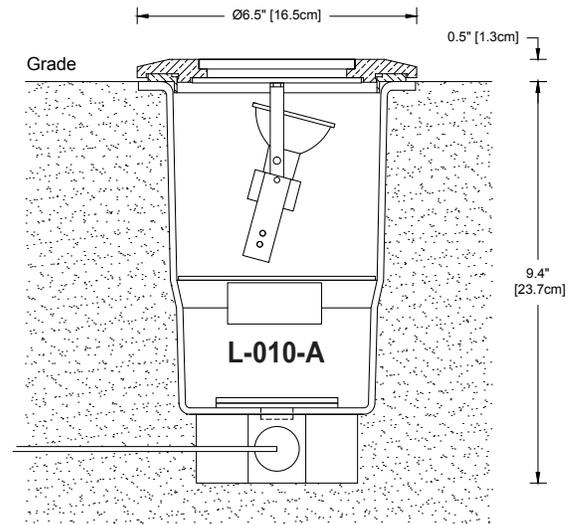

**Weight:** 5.3 lbs. [2.4 kg]

IP 67  
CSA Listed, file #190030  
10 year fixture warranty  
Drive-over static load rating: 12,500 lbs

**Fixtures supplied with 15 ft. [4.5 m] type SJOOW cord for remote connectors.**

**MADE IN USA**

Project	By	Date
For ordering purposes, please specify (example: <b>L-010-A-CR—MH39MR16FL—BGS2—FR-MR16</b> )		
<b>L-010-A-</b>		
Fixture	Lamp	Accessory(ies)