

# X1-S

The X1-S is an unobtrusive, low-voltage, aimable path light. More compact than a shaded path light, its minimalist design allows attention to focus on the lamp's extra-wide flood effect, not the fixture itself.



**Construction** All brass components. 1/8" [3mm] thick brass housing. 1/2" schedule 40 brass stem.

**Lens** Tempered soda lime glass.

**Voltage** 9-15V input. Triac dimmable with MLV dimmer. Remote transformer required.

**Fixture Height** Custom stem heights are available upon request. Standard overall height is 20".

— **20** 20" [51 cm]  
 — Custom height (in inches)

**Lamps** Triac dimmable: MLV >6% typ.

Cree XPE2 LED  
 2 Watt Amber (1500K)  
**TURTLE FRIENDLY**  
 — **2W-A-NO** No Optic 46° Beam, 114° Field


Cree XPG2 LED  
 3 Watt  
 Warm White (3000K)\*  
 — **3W-NO** No Optic 47° Beam, 86° Field

\* Also available in 2700K. Add color suffix to lamp specification, e.g. "3W-NO-2700K"

**Optical Accessories**  
 — **BGS8** Brass glare shield, 45° cutoff  
 — **BGS8F** Brass glare shield, full cutoff

**Mounting Accessories** 1/2" male threads. Mounts into any standard j-box or:  
 — **BSB** Brass Surface Box for surface-mount applications on concrete or wood. Includes internal brass collar and stainless steel lag screws. 4.25" (11cm) diameter x 2.0" (5cm) high.  
 — **GS2** Heavy-duty ground spike  
 — **GS2BC** Heavy-duty ground spike with cast brass cap  
 — **GS3R** Heavy-duty ground spike with brass cap for telescoping fixture riser  
 — **JB** Cast brass junction box

**Finish:** Unfinished is standard; no specification required. The fixture will weather to a natural patina. The patina process is natural with brass and copper. Rate of patina and eventual color is dependent upon climate and proximity to the ocean. Thus, Beachside does not guarantee any specific appearance.

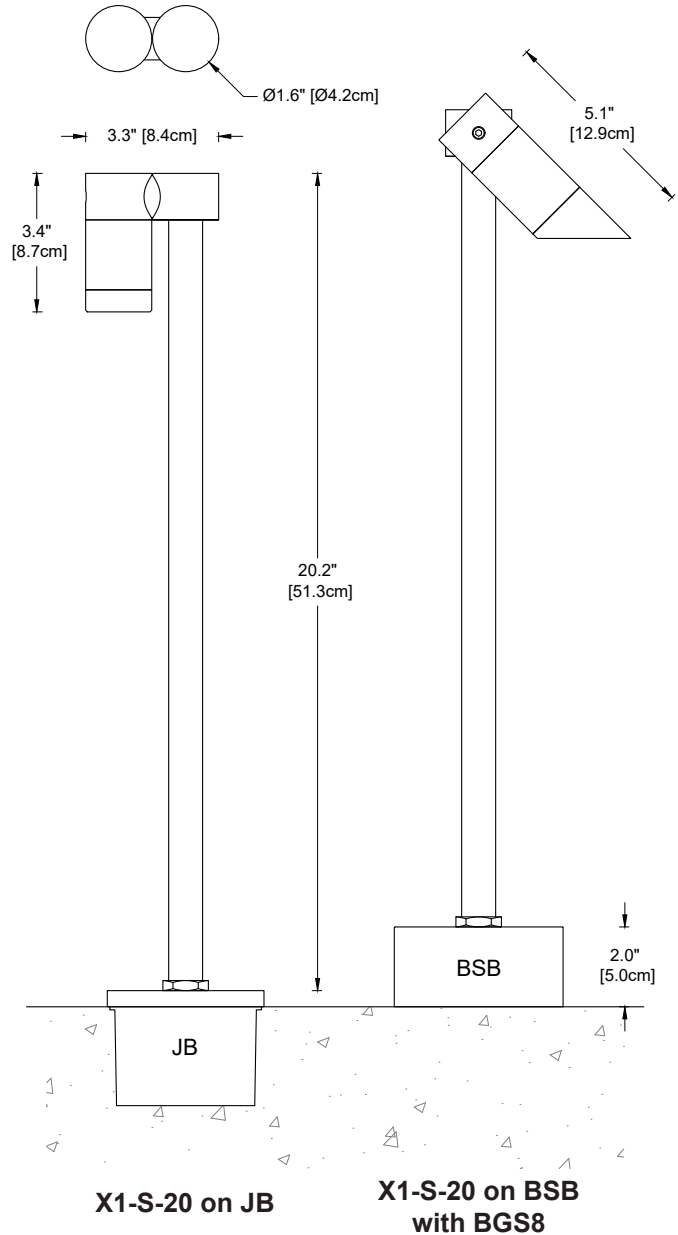

IP 66  
 CSA Listing pending  
 10 year fixture warranty  
 5 year Cree LED module warranty

**MADE IN USA**

Project _____	By _____	Date _____
For ordering purposes, please specify (example: <b>X1-S-20-2W-A-NO-BGS8-BSB</b> )		
<b>X1-S</b>	—	—
Fixture	Fixture Height	Accessory(ies)
—	—	—
Lamp / Optic	—	—