



8165 E Kaiser Blvd. Anaheim, CA 92808  
www.lightlaboratory.com

Report No: L021904302



**Report No:** L021904302

**Issue Date:** 3/4/2019

**Report Prepared For:** Beachside Lighting  
905 Kalaniana'ole Hwy #2901 Kailua, HI 96734

**Model Number:** RP-120V-4W

**Test:** Photometric/Colorimetric/Electrical Test

**Standards Used:** Appropriate part or all test guidelines were used for test performed:  
*IESNA LM79: 2008* Approved Methods for Electrical and Photometric Measurements of Solid-State Lighting Products  
*ANSI NEMA ANSLG C78.377: 2008* Specification of the Chromaticity of Solid State Lighting Products  
*ANSI C82.77:2002:* Harmonic Emission Limits-Related Quality Requirements for Lighting Equipment

**Description of Sample:** Client submitted the sample. Received in working and undamaged condition. No modifications were necessary.

**Special Test Condition:** Fixture is tested with no special conditions.

**Sample Arrival Date:** 2/13/19

**Date of Tests:** 3/1/19 - 3/2/19

**Seasoning of Sample:** No seasoning was performed in accordance with IESNA LM-79.

**Equipment List**

| Equipment Used                    | Model No   | Stock No   | Calibration Due Date |
|-----------------------------------|------------|------------|----------------------|
| Chroma Programmable AC Source     | 61604      | PS-AC02    | --                   |
| Yokogawa Digital Power Meter      | WT210      | MT-EL06-S4 | 1/9/21               |
| BK PRECISION                      | 1747       | PS-DC04    | 1/10/21              |
| Fluke Digital Thermometer         | 52K/J      | MT-TP05    | 1/10/21              |
| LLI Type C Goniophotometer System | RMG-C-MKII | CD-LL04-GC | --                   |
| LLI 2M Sphere                     | 2MR97      | CD-SN03-S2 | --                   |
| LLI Spectroradiometer             | SPR-3000   | MT-SC01-S2 | Before Use           |

**General Information**

|                             |                    |
|-----------------------------|--------------------|
| <b>Manufacturer:</b>        | Beachside Lighting |
| <b>Model Number:</b>        | RP-120V-4W         |
| <b>Driver Model Number:</b> | N/A                |

**Test Summary**

|                                      |        |
|--------------------------------------|--------|
| <b>Total Lumens:</b>                 | 120.60 |
| <b>Efficacy:</b>                     | 39.55  |
| <b>Color Redering Index:</b>         | 81.1   |
| <b>Correlated Color Temperature:</b> | 2578   |
| <b>Input Voltage (VAC/60Hz):</b>     | 120.03 |
| <b>Input Current (Amp):</b>          | 0.0277 |
| <b>Input Power (W):</b>              | 3.05   |
| <b>Input Power Factor:</b>           | 0.9147 |
| <b>Current ATHD (%):</b>             | 40.3%  |

**Test Condition**

|                                      |      |
|--------------------------------------|------|
| <b>Ambient Temperature (°C):</b>     | 25.0 |
| <b>Stabilization Time (Hours):</b>   | 1:00 |
| <b>Total Operating Time (Hours):</b> | 1:50 |


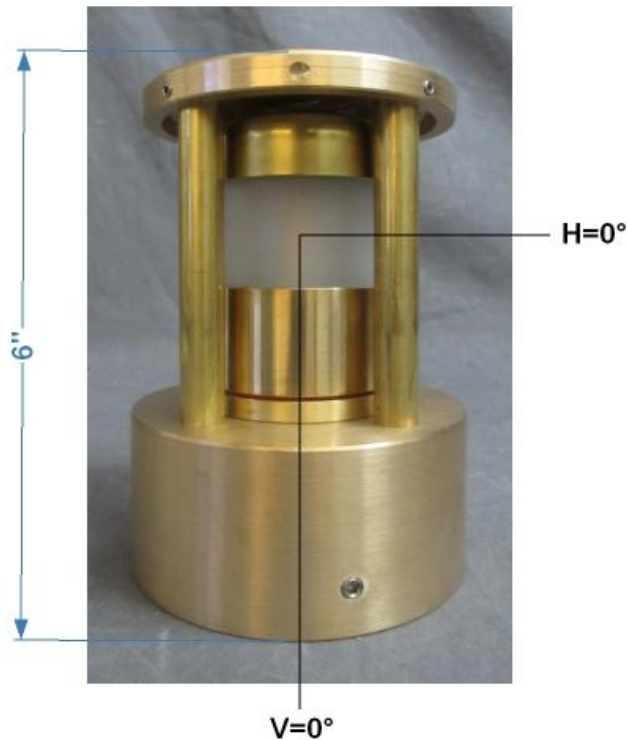


FIG. 1 LUMINAIRE

**Colorimetry Test Results**

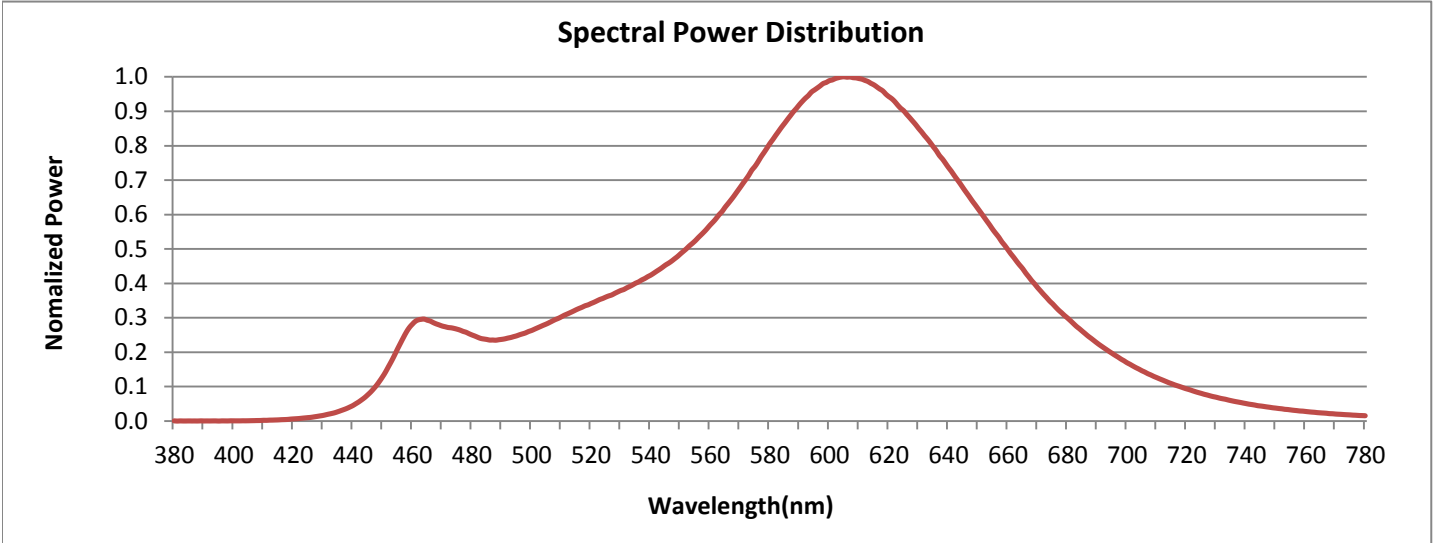


**CRI & CCT**

|     |         |
|-----|---------|
| x   | 0.4733  |
| y   | 0.4180  |
| u'  | 0.2678  |
| v'  | 0.5322  |
| CRI | 81.10   |
| CCT | 2578    |
| Duv | 0.00171 |

**R Values**

|     |       |
|-----|-------|
| R1  | 80.41 |
| R2  | 94.17 |
| R3  | 89.78 |
| R4  | 76.93 |
| R5  | 81.67 |
| R6  | 95.84 |
| R7  | 77.45 |
| R8  | 52.87 |
| R9  | 3.85  |
| R10 | 88.11 |
| R11 | 76.41 |
| R12 | 80.35 |
| R13 | 83.79 |
| R14 | 94.88 |
| R15 | 71.05 |

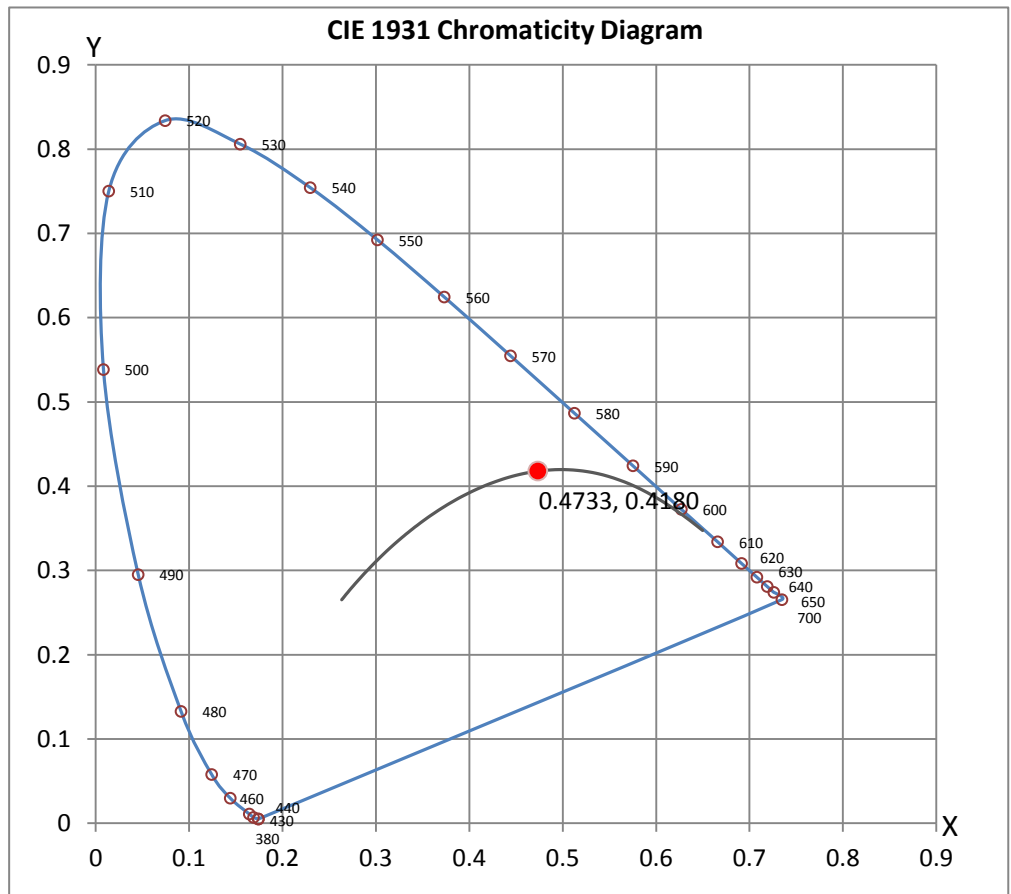

## Test Methods

### Photometric Measurements - Goniophotometer

A Custom Light Laboratory Type C Rotating Mirror Goniophotometer was used to measure candelas(intensity) at each angle of distribution as defined by IESNA for the appropriate fixture type.

Ambient temperature is set to 25°C and is measured from the center of the fixture, within 1ft from the outside of the fixture. Temperature is maintained at 25°C throughout the testing process and the sample is stabilized for at least 30mins and longer as necessary for the sample to achieve stabilization.

Electrical measurements are measured using the listed equipment.

### Spectral Measurements - Integrating Sphere

A Sensing Spectroradiometer SPR-3000, in conjunction with Light Laboratory 2 meter integrating sphere was used to measure chromaticity coordinates, correlated color temperature(CCT) and the color rendering index(CRI) for each sample.

Ambient temperature is set to 25°C and is measured from the center of the fixture, within 1ft from the outside of the fixture. Temperature is maintained at 25°C throughout the testing process and the sample is stabilized for at least 30mins and longer as necessary for the sample to achieve stabilization.

Electrical measurements are measured using the listed equipment.

### Disclaimers:

This report must not be used by the customer to claim product certification, approval or endorsement by NVLAP, NIST or any agency of Federal Government.

Report Prepared by :           Dennis Malonzo          

Test Report Reviewed by:



Steve Kang  
Quality Assurance

*\*Attached are photometric data reports. Total number of pages: 12*



8165 E. Kaiser Blvd. Anaheim, CA 92808  
 www.lightlaboratory.com

# Photometric Test Report

**IES ROAD REPORT**  
**PHOTOMETRIC FILENAME : L021904302.IES**

**DESCRIPTIVE INFORMATION (From Photometric File)**

IESNA:LM-63-2002  
 [TEST] L021904302  
 [TESTLAB] LIGHT LABORATORY, INC. (www.lightlaboratory.com)  
 [ISSUEDATE] 03/01/2019  
 [MANUFAC] Beachside Lighting  
 [LUMCAT] RP-120V-4W  
 [LUMINAIRE] RP with 4w G9 3000K Lamping  
 [BALLASTCAT] N/A  
 [OTHER] INDICATING THE CANDELA VALUES ARE ABSOLUTE AND  
 [MORE] SHOULD NOT BE FACTORED FOR DIFFERENT LAMP RATINGS.  
 [INPUT] 120.03VAC, 3.05W  
 [TEST PROCEDURE] IESNA:LM-79-08

**CHARACTERISTICS**

|   |                                 |
|---|---------------------------------|
| IES Classification                              | Type VS                         |
| Longitudinal Classification                     | Very Long                       |
| Lumens Per Lamp                                 | N.A. (absolute)                 |
| Total Lamp Lumens                               | N.A. (absolute)                 |
| Luminaire Lumens                                | 120                             |
| Downward Total Efficiency                       | N.A. (absolute)                 |
| Total Luminaire Efficiency                      | N.A. (absolute)                 |
| Luminaire Efficacy Rating (LER)                 | 40                              |
| Total Luminaire Watts                           | 3.05                            |
| Ballast Factor                                  | 1.00                            |
| Upward Waste Light Ratio                        | 0.42                            |
| Maximum Candela                                 | 23                              |
| Maximum Candela Angle                           | 90H 87.5V                       |
| Maximum Candela (<90 Degrees Vertical)          | 23                              |
| Maximum Candela Angle (<90 Degrees Vertical)    | 90H 87.5V                       |
| Maximum Candela At 90 Degrees Vertical          | 22.843 (19.0% Luminaire Lumens) |
| Maximum Candela from 80 to <90 Degrees Vertical | 23 (19.2% Luminaire Lumens)     |
| Cutoff Classification (deprecated)              | N.A. (absolute)                 |

**IES ROAD REPORT**  
**PHOTOMETRIC FILENAME : L021904302.IES**

**LUMINAIRE CLASSIFICATION SYSTEM (LCS)**

|                               | Lumens   | % Lamp | % Luminaire |
|-------------------------------|----------|--------|-------------|
| FL - Front-Low (0-30)         | 0.4      | N.A.   | 0.3         |
| FM - Front-Medium (30-60)     | 7.7      | N.A.   | 6.4         |
| FH - Front-High (60-80)       | 16.5     | N.A.   | 13.7        |
| FVH - Front-Very High (80-90) | 10.3     | N.A.   | 8.5         |
| BL - Back-Low (0-30)          | 0.4      | N.A.   | 0.3         |
| BM - Back-Medium (30-60)      | 7.7      | N.A.   | 6.4         |
| BH - Back-High (60-80)        | 16.5     | N.A.   | 13.7        |
| BVH - Back-Very High (80-90)  | 10.3     | N.A.   | 8.5         |
| UL - Uplight-Low (90-100)     | 19.9     | N.A.   | 16.5        |
| UH - Uplight-High (100-180)   | 30.9     | N.A.   | 25.6        |
| Total                         | 120.6    | N.A.   | 100.0       |
| BUG Rating                    | B0-U2-G1 |        |             |

**ZONAL LUMEN SUMMARY**

| Zone    | %    |
|---------|------|
| 0-20    | 0.1  |
| 0-30    | 0.6  |
| 0-40    | 2.4  |
| 0-60    | 13.5 |
| 0-80    | 40.8 |
| 0-90    | 57.9 |
| 10-90   | 57.9 |
| 20-40   | 2.2  |
| 20-50   | 6    |
| 40-70   | 23   |
| 60-80   | 27.4 |
| 70-80   | 15.5 |
| 80-90   | 17.1 |
| 90-110  | 29.7 |
| 90-120  | 36.9 |
| 90-130  | 40.2 |
| 90-150  | 42   |
| 90-180  | 42.1 |
| 110-180 | 12.4 |
| 0-180   | 100  |

**IES ROAD REPORT**  
**PHOTOMETRIC FILENAME : L021904302.IES**

**CANDELA TABULATION**

| Vert. Angles | Horizontal Angles |          |           |           |           |           |           |           |           |           |
|--------------|-------------------|----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
|              | <u>0</u>          | <u>5</u> | <u>10</u> | <u>15</u> | <u>20</u> | <u>25</u> | <u>30</u> | <u>35</u> | <u>40</u> | <u>45</u> |
| 0.0          | 0.000             | 0.000    | 0.000     | 0.000     | 0.000     | 0.000     | 0.000     | 0.000     | 0.000     | 0.000     |
| 10.0         | 0.349             | 0.341    | 0.349     | 0.349     | 0.367     | 0.367     | 0.375     | 0.375     | 0.375     | 0.375     |
| 20.0         | 0.541             | 0.550    | 0.541     | 0.533     | 0.533     | 0.533     | 0.524     | 0.515     | 0.515     | 0.506     |
| 30.0         | 2.393             | 2.384    | 2.340     | 2.297     | 2.209     | 2.113     | 2.026     | 1.947     | 1.895     | 1.869     |
| 35.0         | 3.580             | 3.589    | 3.510     | 3.475     | 3.379     | 3.266     | 3.161     | 3.047     | 2.960     | 2.925     |
| 40.0         | 4.680             | 4.645    | 4.611     | 4.602     | 4.532     | 4.410     | 4.218     | 3.982     | 3.781     | 3.702     |
| 45.0         | 6.182             | 6.156    | 6.139     | 6.165     | 6.095     | 5.903     | 5.571     | 5.108     | 4.750     | 4.584     |
| 50.0         | 8.173             | 8.156    | 8.182     | 8.243     | 8.226     | 7.902     | 7.326     | 6.558     | 5.850     | 5.519     |
| 55.0         | 10.863            | 10.880   | 10.967    | 11.186    | 11.186    | 10.732    | 9.675     | 8.357     | 7.073     | 6.575     |
| 60.0         | 13.587            | 13.639   | 13.814    | 14.076    | 14.102    | 13.500    | 12.138    | 10.094    | 8.409     | 7.527     |
| 65.0         | 16.242            | 16.285   | 16.582    | 16.914    | 16.984    | 16.128    | 14.373    | 11.919    | 9.640     | 8.400     |
| 70.0         | 18.547            | 18.590   | 18.861    | 19.324    | 19.350    | 18.512    | 16.320    | 13.465    | 10.548    | 9.151     |
| 72.5         | 19.403            | 19.481   | 19.848    | 20.241    | 20.319    | 19.307    | 17.115    | 13.866    | 11.072    | 9.378     |
| 75.0         | 20.136            | 20.267   | 20.573    | 21.027    | 21.018    | 20.136    | 17.743    | 14.364    | 11.395    | 9.675     |
| 77.5         | 20.800            | 20.835   | 21.158    | 21.629    | 21.655    | 20.669    | 18.241    | 14.923    | 11.421    | 9.771     |
| 80.0         | 21.201            | 21.271   | 21.664    | 22.101    | 22.144    | 21.070    | 18.625    | 15.010    | 11.858    | 9.867     |
| 82.5         | 21.446            | 21.594   | 21.909    | 22.424    | 22.415    | 21.455    | 18.678    | 15.211    | 11.954    | 10.007    |
| 85.0         | 21.708            | 21.751   | 22.136    | 22.555    | 22.590    | 21.428    | 18.992    | 15.482    | 11.753    | 9.963     |
| 87.5         | 21.725            | 21.830   | 22.127    | 22.616    | 22.598    | 21.559    | 19.193    | 15.325    | 12.033    | 9.920     |
| 90.0         | 21.690            | 21.682   | 21.979    | 22.476    | 22.502    | 21.533    | 18.905    | 15.395    | 11.780    | 9.920     |
| 92.5         | 21.376            | 21.428   | 21.786    | 22.240    | 22.293    | 21.228    | 18.739    | 15.063    | 11.832    | 9.745     |
| 95.0         | 20.939            | 21.062   | 21.359    | 21.848    | 21.830    | 20.922    | 18.241    | 14.853    | 11.649    | 9.693     |
| 97.5         | 20.450            | 20.468   | 20.843    | 21.262    | 21.306    | 20.215    | 17.927    | 14.626    | 11.116    | 9.413     |
| 100.0        | 19.647            | 19.761   | 20.023    | 20.433    | 20.459    | 19.568    | 17.316    | 13.971    | 11.029    | 9.116     |
| 102.5        | 18.739            | 18.756   | 18.992    | 19.464    | 19.490    | 18.695    | 16.355    | 13.369    | 10.566    | 8.846     |
| 105.0        | 17.604            | 17.656   | 17.892    | 18.250    | 18.329    | 17.499    | 15.517    | 12.723    | 10.024    | 8.330     |
| 107.5        | 16.294            | 16.399   | 16.591    | 16.949    | 16.984    | 16.276    | 14.251    | 11.587    | 9.352     | 7.911     |
| 110.0        | 14.984            | 14.975   | 15.176    | 15.473    | 15.508    | 14.731    | 13.133    | 10.863    | 8.479     | 7.300     |
| 115.0        | 12.068            | 12.146   | 12.268    | 12.478    | 12.461    | 11.928    | 10.513    | 8.784     | 7.169     | 6.191     |
| 120.0        | 9.361             | 9.396    | 9.483     | 9.588     | 9.562     | 9.134     | 8.208     | 6.863     | 5.798     | 5.021     |
| 125.0        | 6.863             | 6.863    | 6.916     | 6.951     | 6.933     | 6.601     | 6.025     | 5.239     | 4.392     | 3.886     |
| 130.0        | 4.960             | 4.942    | 4.942     | 4.942     | 4.899     | 4.707     | 4.296     | 3.833     | 3.353     | 2.934     |
| 135.0        | 3.458             | 3.467    | 3.432     | 3.405     | 3.344     | 3.196     | 2.978     | 2.698     | 2.393     | 2.087     |
| 140.0        | 2.113             | 2.113    | 2.078     | 2.052     | 2.026     | 1.947     | 1.851     | 1.720     | 1.546     | 1.380     |
| 145.0        | 1.292             | 1.284    | 1.275     | 1.240     | 1.231     | 1.196     | 1.153     | 1.092     | 1.030     | 0.952     |
| 150.0        | 0.891             | 0.882    | 0.856     | 0.847     | 0.821     | 0.821     | 0.795     | 0.768     | 0.733     | 0.681     |
| 160.0        | 0.000             | 0.000    | 0.000     | 0.000     | 0.000     | 0.000     | 0.000     | 0.000     | 0.000     | 0.000     |
| 170.0        | 0.000             | 0.000    | 0.000     | 0.000     | 0.000     | 0.000     | 0.000     | 0.000     | 0.000     | 0.000     |
| 180.0        | 0.000             | 0.000    | 0.000     | 0.000     | 0.000     | 0.000     | 0.000     | 0.000     | 0.000     | 0.000     |

| Vert. Angles | Horizontal Angles |           |           |           |           |           |           |           |           |  |
|--------------|-------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|--|
|              | <u>50</u>         | <u>55</u> | <u>60</u> | <u>65</u> | <u>70</u> | <u>75</u> | <u>80</u> | <u>85</u> | <u>90</u> |  |
| 0.0          | 0.000             | 0.000     | 0.000     | 0.000     | 0.000     | 0.000     | 0.000     | 0.000     | 0.000     |  |
| 10.0         | 0.367             | 0.341     | 0.341     | 0.323     | 0.306     | 0.297     | 0.297     | 0.297     | 0.297     |  |
| 20.0         | 0.506             | 0.498     | 0.506     | 0.515     | 0.515     | 0.515     | 0.515     | 0.533     | 0.541     |  |
| 30.0         | 1.886             | 1.956     | 2.052     | 2.131     | 2.209     | 2.279     | 2.358     | 2.401     | 2.428     |  |
| 35.0         | 2.978             | 3.074     | 3.187     | 3.301     | 3.405     | 3.484     | 3.545     | 3.633     | 3.650     |  |
| 40.0         | 3.798             | 3.999     | 4.218     | 4.436     | 4.567     | 4.628     | 4.680     | 4.741     | 4.768     |  |
| 45.0         | 4.741             | 5.100     | 5.527     | 5.859     | 6.104     | 6.191     | 6.226     | 6.296     | 6.339     |  |
| 50.0         | 5.798             | 6.497     | 7.186     | 7.745     | 8.147     | 8.260     | 8.287     | 8.374     | 8.400     |  |
| 55.0         | 6.968             | 8.138     | 9.326     | 10.356    | 10.941    | 11.142    | 11.160    | 11.247    | 11.282    |  |
| 60.0         | 8.095             | 9.649     | 11.509    | 12.871    | 13.701    | 14.076    | 14.059    | 14.181    | 14.321    |  |


**IES ROAD REPORT**  
**PHOTOMETRIC FILENAME : L021904302.IES**

**CANDELA TABULATION - (Cont.)**

|              |        |        |        |        |        |        |        |        |        |
|--------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| <b>65.0</b>  | 9.108  | 11.343 | 13.439 | 15.141 | 16.442 | 16.888 | 16.923 | 17.089 | 17.185 |
| <b>70.0</b>  | 9.876  | 12.504 | 15.168 | 17.351 | 18.625 | 19.254 | 19.350 | 19.516 | 19.647 |
| <b>72.5</b>  | 10.234 | 13.002 | 15.805 | 17.979 | 19.595 | 20.162 | 20.276 | 20.485 | 20.625 |
| <b>75.0</b>  | 10.566 | 13.255 | 16.346 | 18.809 | 20.197 | 20.913 | 21.035 | 21.201 | 21.463 |
| <b>77.5</b>  | 10.548 | 13.692 | 16.827 | 19.333 | 20.773 | 21.472 | 21.664 | 21.856 | 22.022 |
| <b>80.0</b>  | 10.810 | 13.788 | 17.115 | 19.534 | 21.236 | 21.944 | 22.101 | 22.328 | 22.511 |
| <b>82.5</b>  | 10.950 | 13.875 | 17.193 | 19.970 | 21.463 | 22.144 | 22.371 | 22.581 | 22.773 |
| <b>85.0</b>  | 10.758 | 14.102 | 17.429 | 19.892 | 21.594 | 22.345 | 22.537 | 22.738 | 22.913 |
| <b>87.5</b>  | 10.871 | 13.954 | 17.560 | 20.057 | 21.586 | 22.389 | 22.537 | 22.721 | 23.000 |
| <b>90.0</b>  | 10.767 | 14.032 | 17.403 | 20.023 | 21.524 | 22.232 | 22.485 | 22.695 | 22.843 |
| <b>92.5</b>  | 10.688 | 13.744 | 17.176 | 19.630 | 21.393 | 22.057 | 22.275 | 22.511 | 22.668 |
| <b>95.0</b>  | 10.583 | 13.491 | 16.774 | 19.499 | 20.931 | 21.725 | 21.909 | 22.109 | 22.354 |
| <b>97.5</b>  | 10.173 | 13.334 | 16.486 | 18.826 | 20.415 | 21.097 | 21.367 | 21.594 | 21.708 |
| <b>100.0</b> | 9.955  | 12.740 | 15.892 | 18.145 | 19.647 | 20.337 | 20.546 | 20.730 | 20.957 |
| <b>102.5</b> | 9.588  | 12.111 | 15.010 | 17.412 | 18.678 | 19.254 | 19.542 | 19.752 | 19.857 |
| <b>105.0</b> | 9.029  | 11.675 | 14.163 | 16.084 | 17.316 | 17.647 | 17.901 | 18.232 | 18.425 |
| <b>107.5</b> | 8.496  | 10.566 | 12.923 | 14.652 | 14.975 | 14.530 | 14.495 | 14.748 | 14.967 |
| <b>110.0</b> | 7.719  | 9.736  | 11.718 | 12.688 | 12.260 | 10.871 | 10.522 | 10.688 | 10.828 |
| <b>115.0</b> | 6.488  | 7.667  | 8.741  | 8.470  | 6.741  | 4.715  | 3.825  | 3.755  | 3.807  |
| <b>120.0</b> | 5.108  | 5.632  | 5.885  | 5.056  | 3.388  | 2.008  | 1.450  | 1.249  | 1.222  |
| <b>125.0</b> | 3.755  | 3.772  | 3.484  | 2.689  | 1.729  | 1.109  | 0.777  | 0.620  | 0.594  |
| <b>130.0</b> | 2.672  | 2.471  | 2.104  | 1.502  | 1.039  | 0.716  | 0.463  | 0.367  | 0.349  |
| <b>135.0</b> | 1.851  | 1.580  | 1.292  | 0.987  | 0.725  | 0.533  | 0.402  | 0.358  | 0.349  |
| <b>140.0</b> | 1.222  | 1.039  | 0.873  | 0.725  | 0.576  | 0.472  | 0.410  | 0.367  | 0.367  |
| <b>145.0</b> | 0.838  | 0.751  | 0.655  | 0.559  | 0.489  | 0.437  | 0.393  | 0.393  | 0.402  |
| <b>150.0</b> | 0.629  | 0.585  | 0.533  | 0.480  | 0.445  | 0.428  | 0.393  | 0.375  | 0.349  |
| <b>160.0</b> | 0.000  | 0.000  | 0.000  | 0.000  | 0.000  | 0.000  | 0.000  | 0.000  | 0.000  |
| <b>170.0</b> | 0.000  | 0.000  | 0.000  | 0.000  | 0.000  | 0.000  | 0.000  | 0.000  | 0.000  |
| <b>180.0</b> | 0.000  | 0.000  | 0.000  | 0.000  | 0.000  | 0.000  | 0.000  | 0.000  | 0.000  |




**COEFFICIENTS OF UTILIZATION**

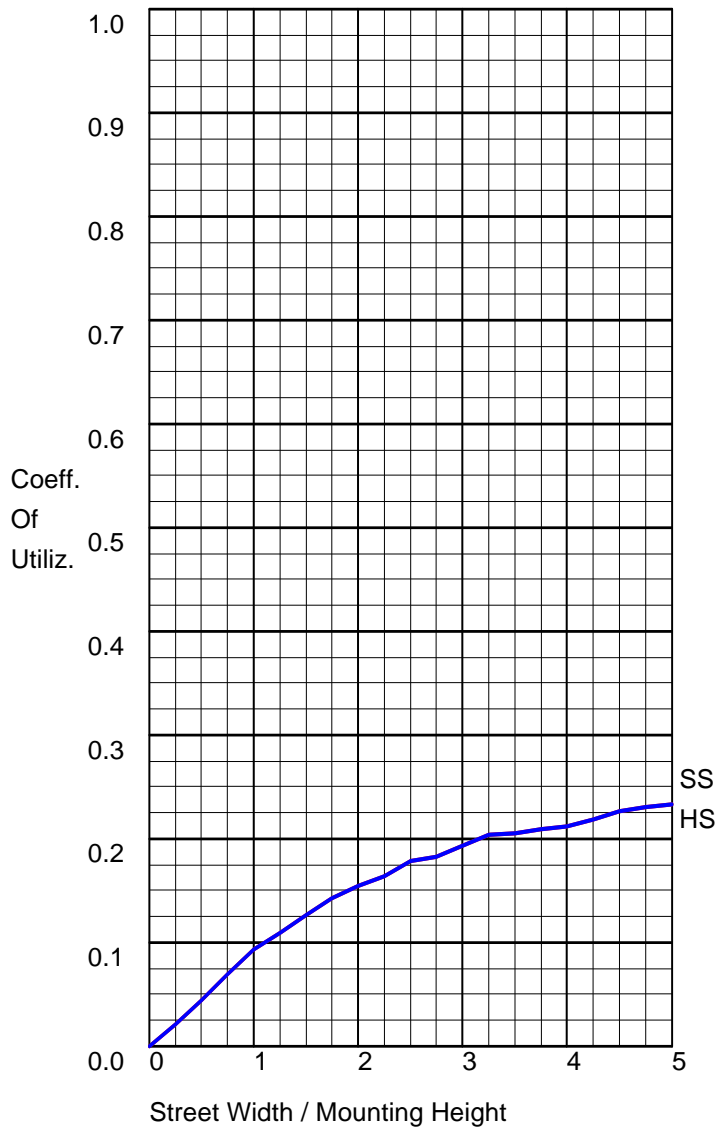

**FLUX DISTRIBUTION**


|                      | Lumens | Percent Of Luminaire |
|----------------------|--------|----------------------|
| Downward Street Side | 34.9   | 28.9                 |
| Downward House Side  | 34.9   | 28.9                 |
| Downward Total       | 69.8   | 57.9                 |
| Upward Street Side   | 25.4   | 21.1                 |
| Upward House Side    | 25.4   | 21.1                 |
| Upward Total         | 50.8   | 42.2                 |
| Total Flux           | 120.6  | 100.1                |

POLAR GRAPH

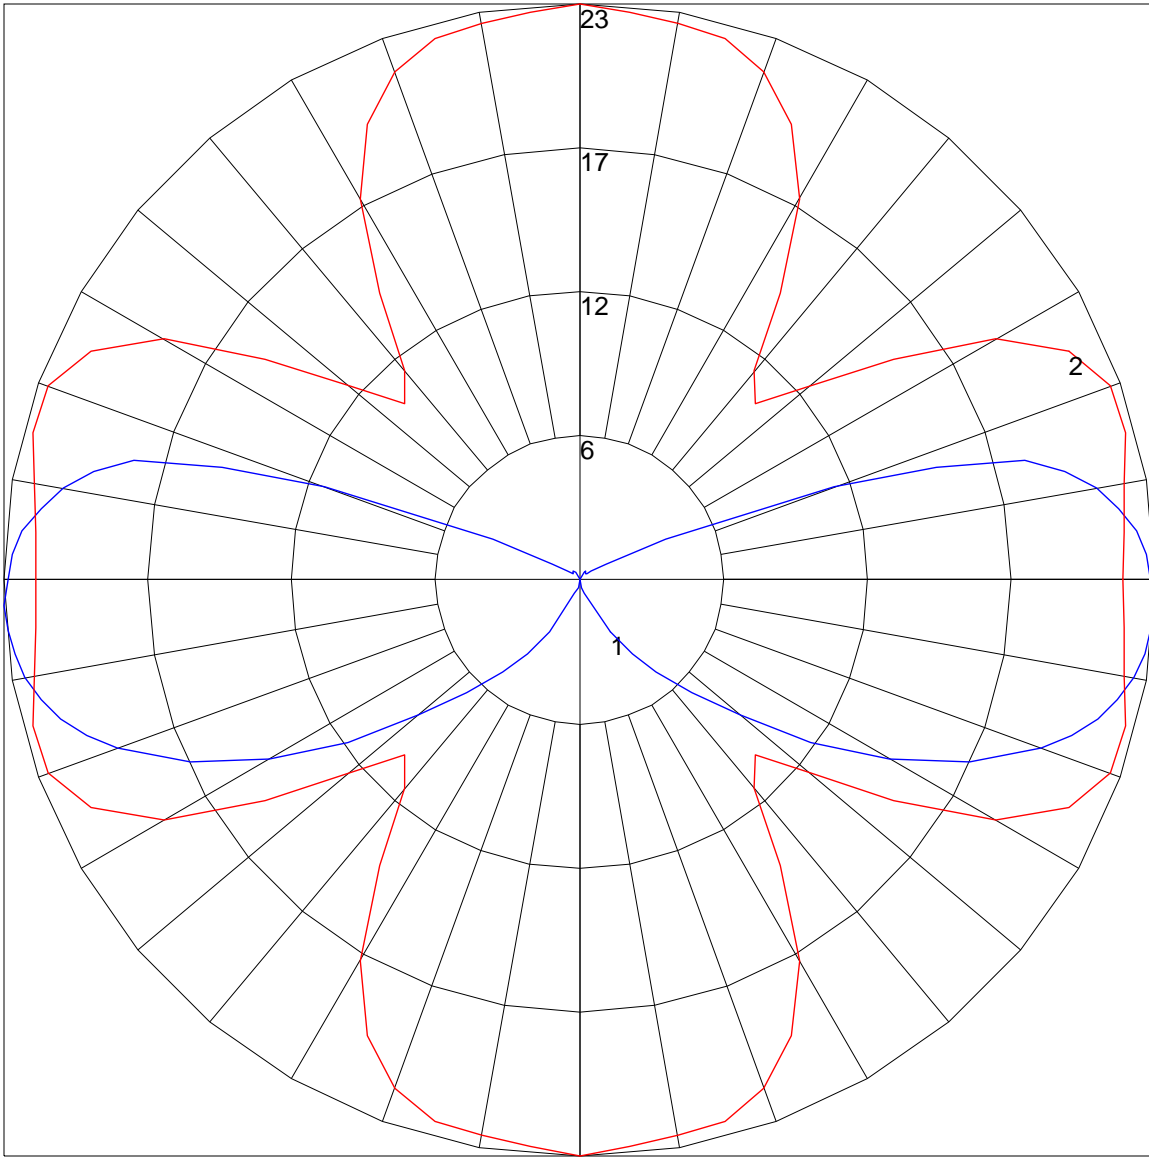


Maximum Candela = 23 Located At Horizontal Angle = 90, Vertical Angle = 87.5  
# 1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.)  
# 2 - Horizontal Cone Through Vertical Angle (87.5) (Through Max. Cd.)

ISOFOOTCANDLE LINES OF HORIZONTAL ILLUMINANCE

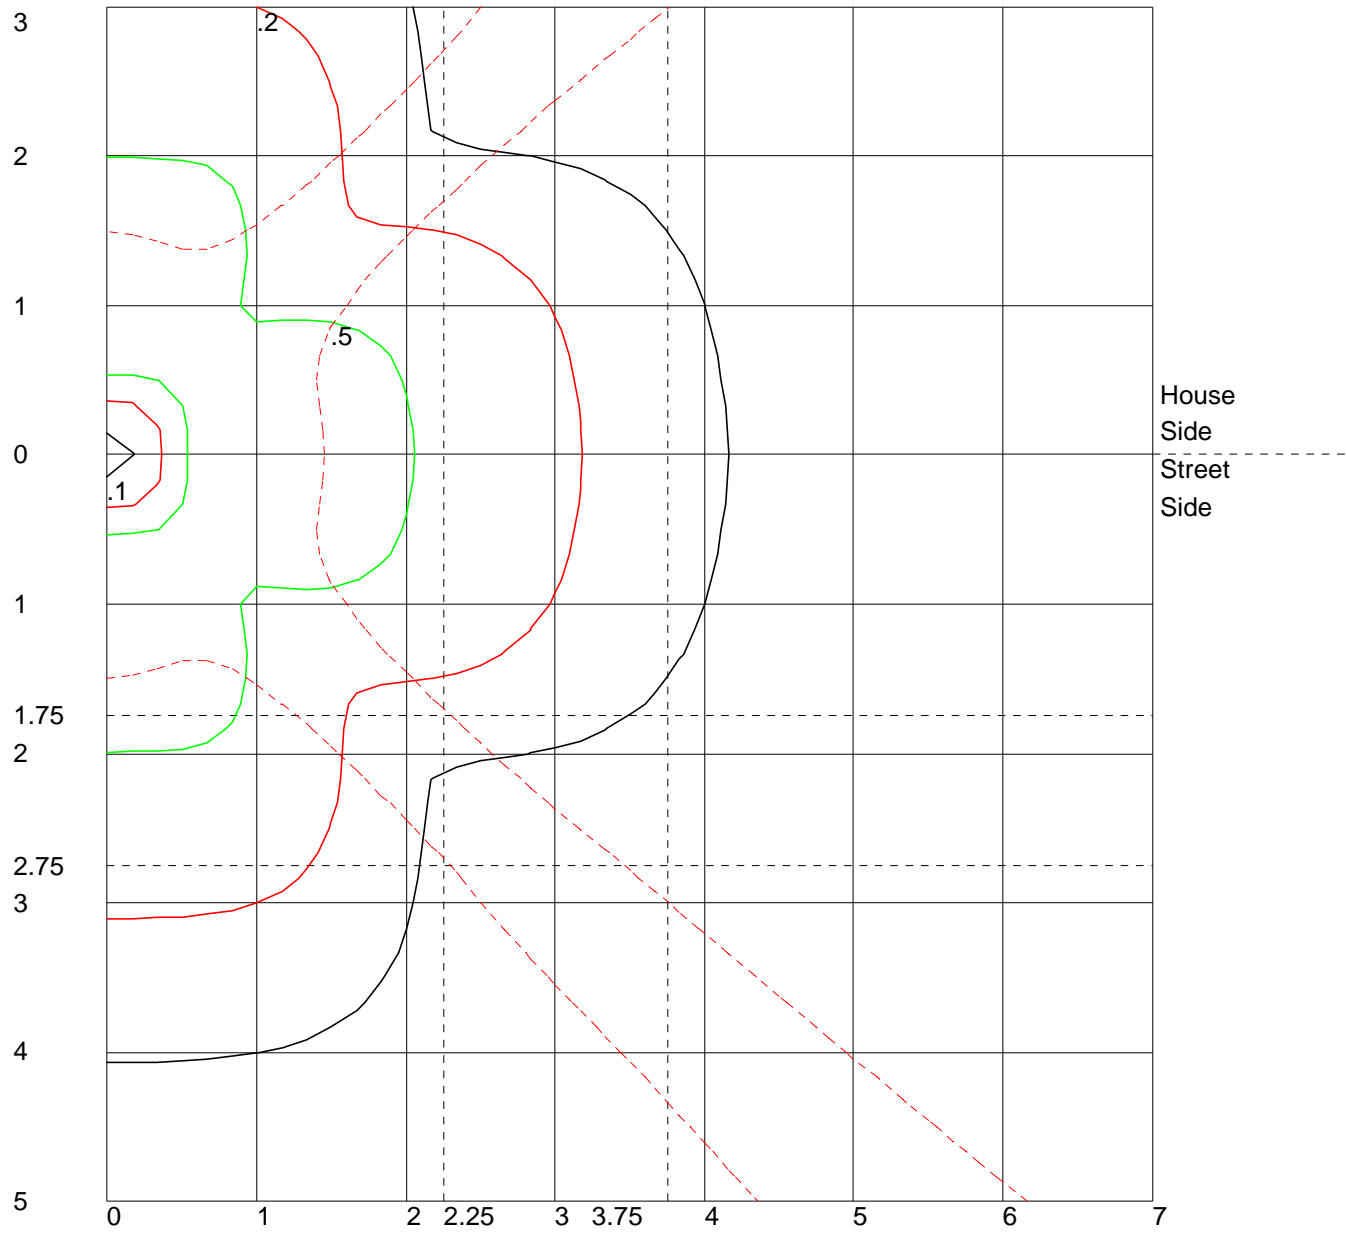

Distance In Units Of Mounting Height  
 Values Based On 1.667 Foot Mounting Height  
 1/2 Maximum Candela Trace Shown As Dashed Curve  
 (+) = Maximum Candela Point

LUMINAIRE CLASSIFICATION SYSTEM (LCS) GRAPH

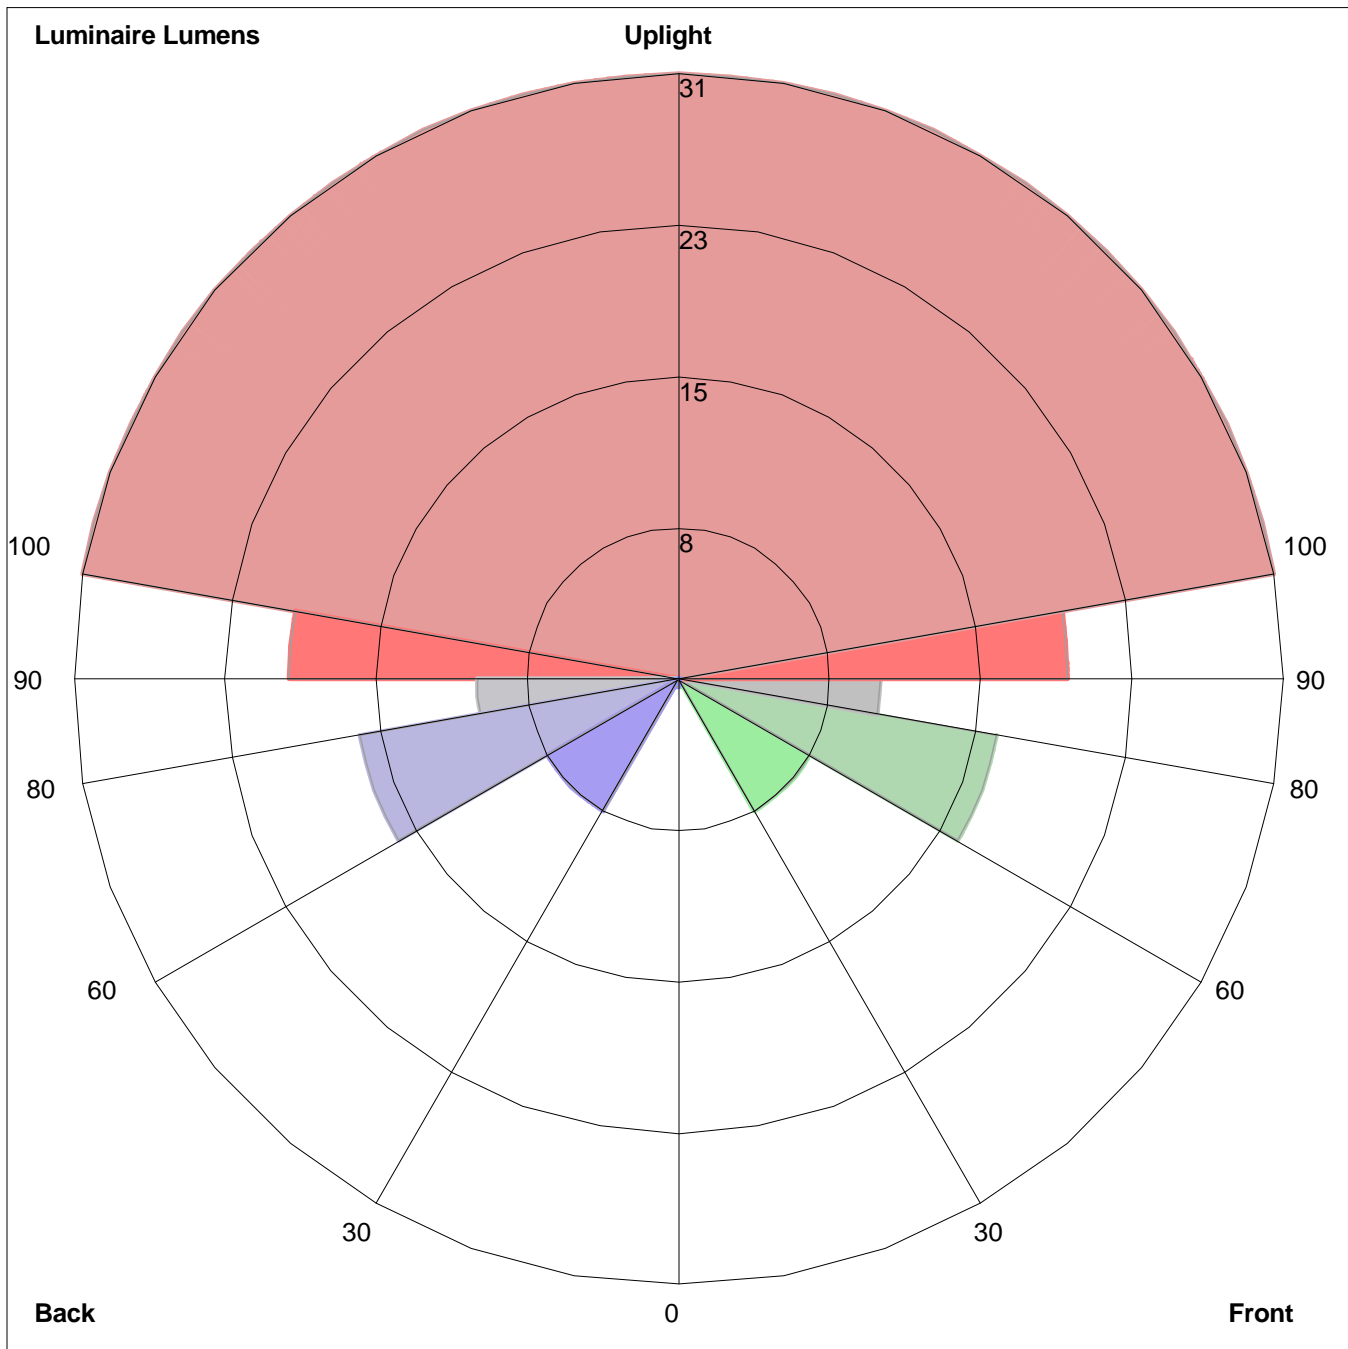

Luminaire Lumens:  
Front: Low=0.4, Medium=7.7, High=16.5, Very High=10.3  
Back: Low=0.4, Medium=7.7, High=16.5, Very High=10.3  
Uplight: Low=19.9, High=30.9

BUG Rating : B0-U2-G1