# STL-A



**Wildlife Lighting
Certification Number
2018-029**

The STL-A is an energy efficient, compact LED steplight suitable for interior or exterior applications. Its 1-Watt output provides maintenance-free illumination in excess of 50,000 hours, while its compact size and integral driver make for simple wiring and easy installation into standard 2" x 4" junction boxes with #6-32 threads at 3.28" on center. Suitable for wet locations. The STL-A faceplate features 0.070" (1.8mm) thick louvers positioned at a 30° angle with cutoff, preventing glare.

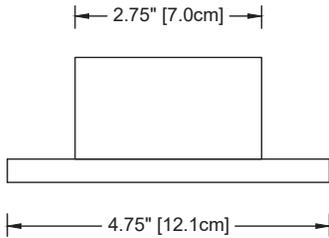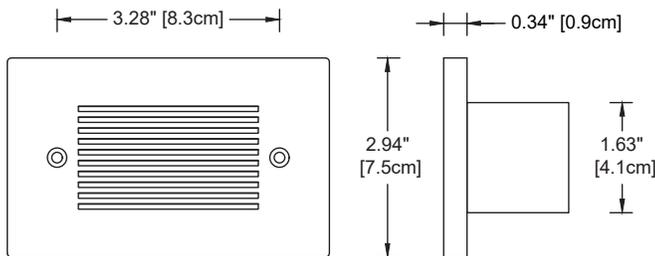| | |
|---|---|
| **Construction** | High-impact, weather-resistant polycarbonate LED module. Solid brass faceplate. |
| **Electrical** | 100-277 Volts, non-dimmable<br>Module consists of 12 LEDs with integral driver<br>1 Watt AMBER (1659K) |
| **Accessory** | __ **SGBOX-SS**  Single-gang stainless steel junction box |
| **Finish** | Unfinished is standard, no specification required. |

__ **FIN-BK**   Black Acid Finish
__ **FIN-DB**   Dark Bronze Acid Finish
__ **FIN-NA**   Nickel Acid Finish
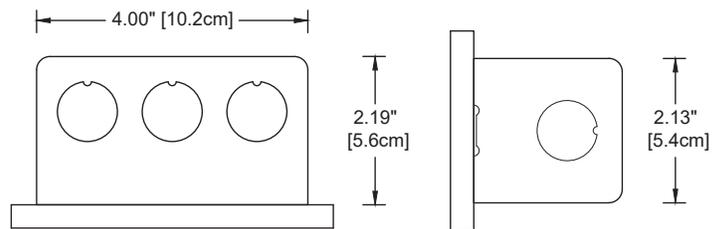__ **FIN-WH**   White Powder Coating

The fixture will weather to a natural patina. The patina process is natural with brass and copper. Rate of patina and eventual color is dependent upon climate and proximity to the ocean. Thus, Beachside does not guarantee any specific appearance.



2.75" [7.0cm]
1.50" [3.8cm]
4.75" [12.1cm]

**LED module + Faceplate**

3.28" [8.3cm]
0.34" [0.9cm]
2.94" [7.5cm]
1.63" [4.1cm]

**DARKSKY APPROVED**
*Reduces light pollution*
**Certified by DarkSky.org**

**C** CSA **US**

**SUITABLE FOR INDOOR AND OUTDOOR USE**

**Mounted on SGBOX-SS accessory**

4.00" [10.2cm]
2.19" [5.6cm]
2.13" [5.4cm]

IP65
5 year fixture warranty

| Project | By | Date |
|---|---|---|
| | | |

For ordering purposes, please specify (example: **STL-A—SGBOX-SS—FIN-NK**)

| **STL-A** | — | | — | |
|---|---|---|---|---|
| Fixture | | Accessory | | Finish (if any) |